
LED tape KWP-GHD-0830-24 8.3 W/m, IP65

Ref. KWP-GHD-0830-24

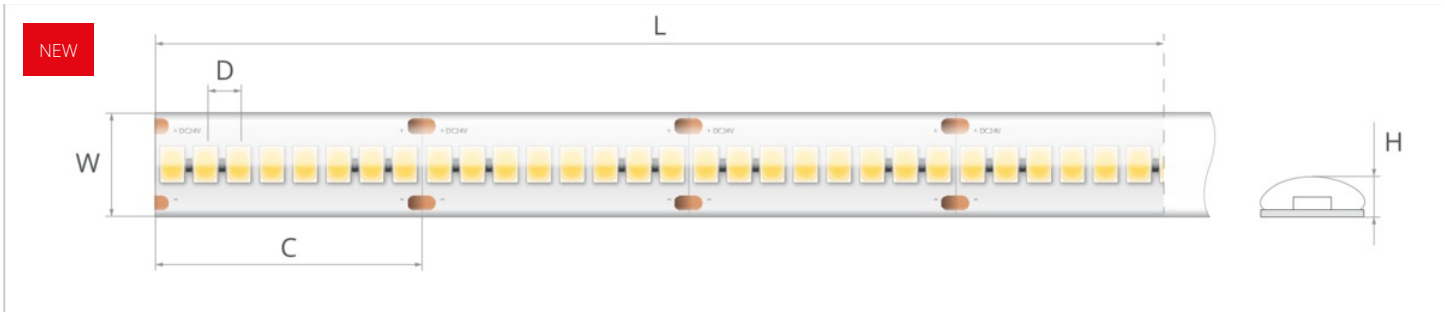

Dimensions: Width [W]: 10 mm | Height [H]: 3 mm | Max run length [L] : 6 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.81 mm

CRI 90+ | IP65 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- High lighting efficacy
- High density diode placement
- Energy class: C
- For the construction of sealed lighting fixtures

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**gel cover**
CRI	**90**
LxBy	**L80B50**
Lifetime	**75000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**8.3 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**240**
Number of LEDs per cut section	**7 pcs**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
2700 K	1330 lm/m	160 lm/W	**KWP-GHD27-0830-24**
3000 K	1370 lm/m	165 lm/W	**KWP-GHD30-0830-24**
3500 K	1400 lm/m	169 lm/W	**KWP-GHD35-0830-24**
4000 K	1445 lm/m	174 lm/W	**KWP-GHD40-0830-24**
5000 K	1445 lm/m	174 lm/W	**KWP-GHD50-0830-24**