
LED tape KWP-GHD-1440-24

Ref. KWP-GHD-1440-24

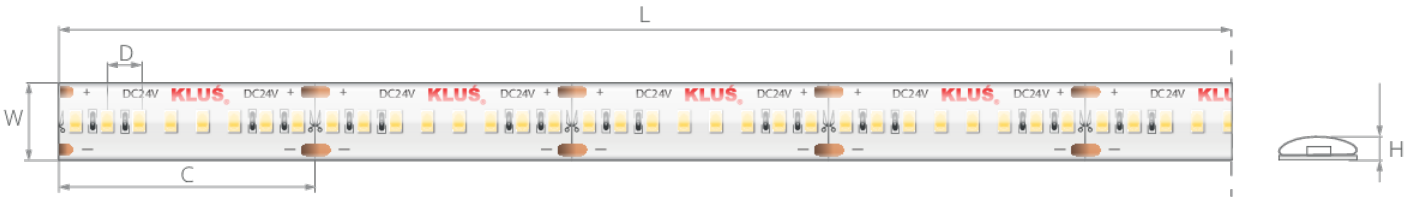

Dimensions: Width [W]: 10 mm | Height [H]: 3 mm | Max run length [L] : 5 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.16 mm

CRI 90+ | IP65 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- High lighting efficacy
- High density diode placement
- Energy class: E
- For the construction of sealed lighting fixtures

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**gel cover**
CRI	**90**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**14.4 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**240**
Number of LEDs per cut section	**7 pcs**
Energy consumption	**14.4 kWh/1000h**
Does not contain mercury and lead	**yes**
Closet Rated	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
2700 K	1610 lm/m	112 lm/W	**KWP-G**
3000 K	1725 lm/m	120 lm/W	**KWP-G**
3500 K	1725 lm/m	120 lm/W	**KWP-G**
4000 K	1785 lm/m	124 lm/W	**KWP-G**
5000 K	1785 lm/m	124 lm/W	**KWP-G**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

LED tape KWP-GHD-1440-24

Ref. KWP-GHD-1440-24

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148