
LED tape K-0910-24 9.1 W/m, IP20

Ref. K-0910-24

NEW

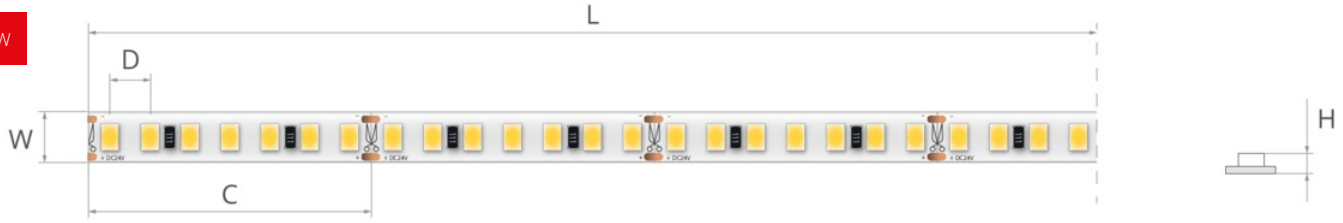

Dimensions: Width [W]: 5 mm | Height [H]: 1.6 mm | Max run length [L] : 3 m | Cut every [C]: 35.7 mm | LED spacing [D]: 5.1 mm

CRI 90+ | IP20 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

- High density diode placement
- CRI 90+

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.1 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**196**
Number of LEDs per cut section	**6 pcs**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	780 lm/m	86 lm/W	**K-27-0910-24**
3000 K	800 lm/m	88 lm/W	**K-30-0910-24**
3500 K	880 lm/m	97 lm/W	**K-35-0910-24**
4000 K	925 lm/m	102 lm/W	**K-40-0910-24**
5000 K	925 lm/m	102 lm/W	**K-50-0910-24**

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-5K-0910-24 9.1 W/m, IP65 NEW	65	9.1 W/m	KWP-5K27-0910-24 KWP-5K30-0910-24 KWP-5K35-0910-24 KWP-5K40-0910-24 KWP-5K50-0910-24