
# LED tape KWP-RGBW-1530-24 15.3 W/m, IP65

## Ref. KWP-RGBW-1530-24

NEW

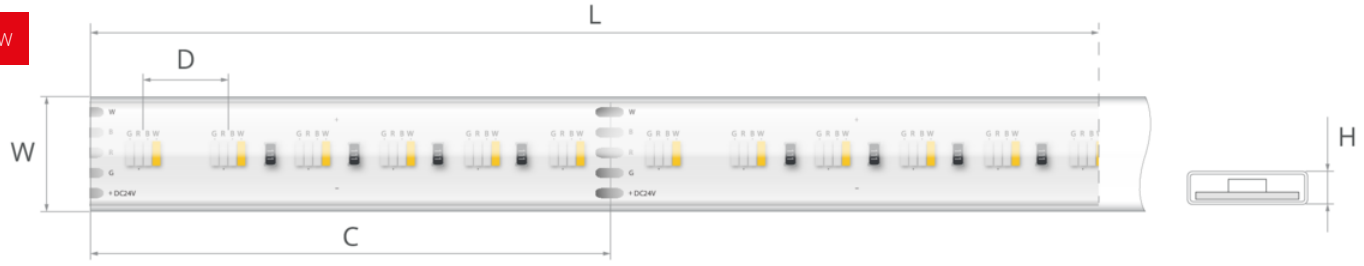


Dimensions: Width [W]: 12.4 mm | Height [H]: 3.7 mm | Max run length [L] : 4 m | Cut every [C]: 62.5 mm | LED spacing [D]: 10.42 mm

CRI 90+ | IP65 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- UL Listed

### TECHNICAL SPECIFICATIONS

| | |
|---|---|
| IP protection rating | 65 |
| Sealing type | silicone sleeve |
| LED color | RGB+W |
| CRI | 90 |
| Lumen output | 315 lm/m<br>45 lm/m<br>305 lm/m<br>65 lm/m |
| LxBy | L80B50 |
| Lifetime | 100000 h |
| Working temperature | -20°C - 60°C |
| Input voltage | 24 V DC |
| Power consumption | 15.3 W/m |
| MacAdam's ellipse | 3 SDCM |
| Number of LEDs per 1 m | 96 |
| Number of LEDs per cut section | 6 pcs |
| Warranty [months] | 48 |

| Color temperature | Ref |
|---|---|
| 3000 K<br>RED<br>GREEN<br>BLUE | KWP-RGB30-1530-24 |
| 4000 K<br>RED<br>GREEN<br>BLUE | KWP-RGB40-1530-24 |

| | |
|---|---|
| Efficiency | 21 lm/W<br>12 lm/W<br>80 lm/W<br>17 lm/W |