
# LED tape K-HD-0430-24 4.3 W/m, IP20

Ref. K-HD-0430-24

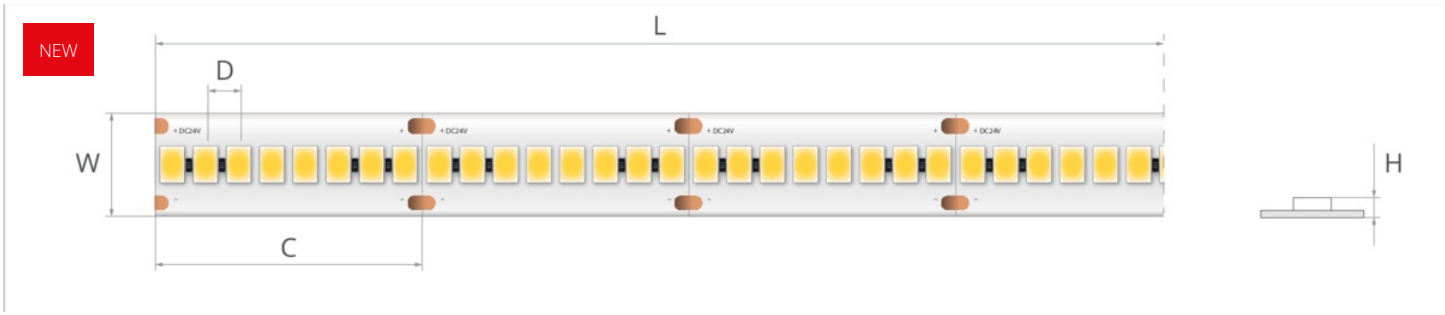


Dimensions: Width [W]: 10 mm | Height [H]: 1.2 mm | Max run length [L] : 9 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.81 mm

CRI 90+ | IP20 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

- CRI 90+
- High lighting efficacy
- High density diode placement
- Energy class: D

## TECHNICAL SPECIFICATIONS

| | |
|---|---|
| IP protection rating | **20** |
| CRI | **90** |
| LxBy | **L80B50** |
| Lifetime | **75000 h** |
| Working temperature | **-20°C - 60°C** |
| Input voltage | **24 V DC** |
| Power consumption | **4.3 W/m** |
| MacAdam's ellipse | **3 SDCM** |
| Number of LEDs per 1 m | **240** |
| Number of LEDs per cut section | **7 pcs** |
| Warranty [months] | **60** |

| Color temperature | Lumen output | Efficiency | Ref |
|---|---|---|---|
| 1800 K | 410 lm/m | 95 lm/W | **K-HD18-0430-24** |
| 2200 K | 565 lm/m | 131 lm/W | **K-HD22-0430-24** |
| 2700 K | 700 lm/m | 163 lm/W | **K-HD27-0430-24** |
| 3000 K | 710 lm/m | 165 lm/W | **K-HD30-0430-24** |
| 4000 K | 730 lm/m | 170 lm/W | **K-HD40-0430-24** |