
LED tape K-CB-1000-24 10 W/m, IP20

Ref. K-CB-1000-24

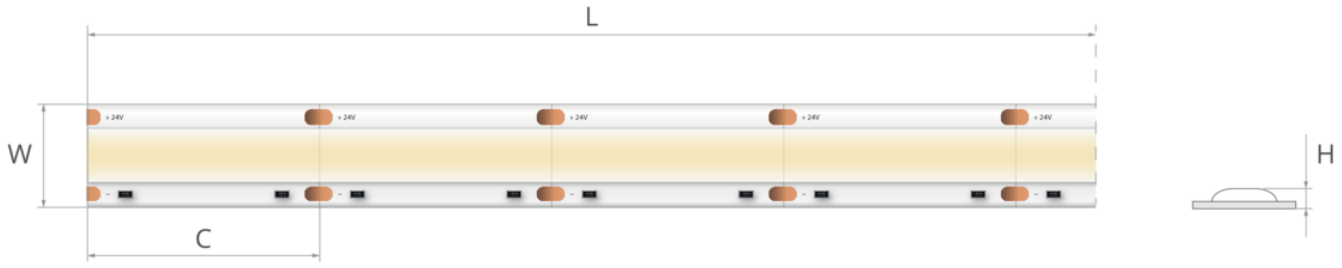

Dimensions: Width [W]: 10 mm | Max run length [L] : 5 m | Cut every [C]: 27.78 mm | LED spacing [D]: 3.47 mm

CRI 90+ | IP20 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**10 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**288**
Number of LEDs per cut section	**8 pcs**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	1450 lm/m	145 lm/W	**K-CB27-1000-24**
3000 K	1500 lm/m	150 lm/W	**K-CB30-1000-24**
4000 K	1600 lm/m	160 lm/W	**K-CB40-1000-24**
5000 K	1600 lm/m	160 lm/W	**K-CB50-1000-24**