
LED tape K-HD-1260-24 12.6 W/m, IP20

Ref. K-HD-1260-24

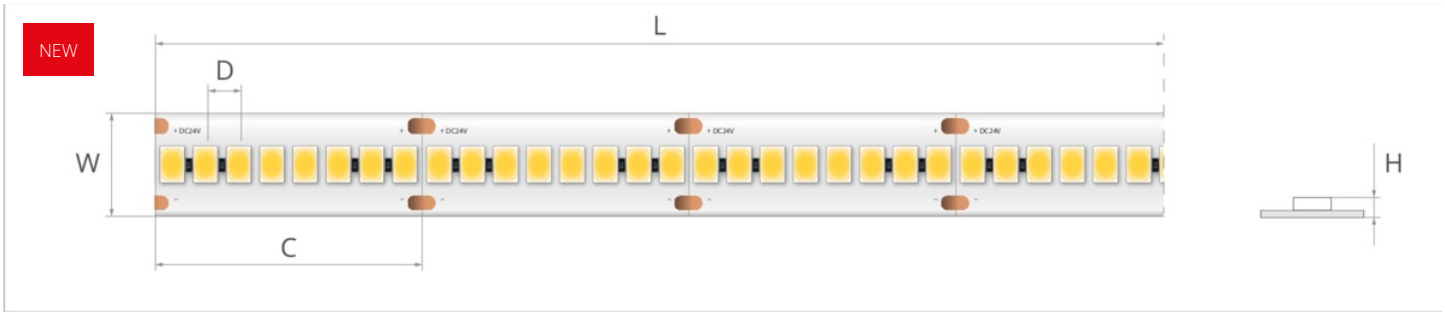

Dimensions: Width [W]: 10 mm | Height [H]: 1.2 mm | Max run length [L] : 4 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.81 mm

CRI 90+ | IP20 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 5 YEARS WARRANTY

- High lighting efficacy
- High density diode placement
- Energy class: D

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**75000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**12.6 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**240**
Number of LEDs per cut section	**7 pcs**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	2055 lm/m	163 lm/W	**K-HD27-1260-24**
3000 K	2080 lm/m	165 lm/W	**K-HD30-1260-24**
3500 K	2080 lm/m	165 lm/W	**K-HD35-1260-24**
5000 K	2140 lm/m	170 lm/W	**K-HD50-1260-24**

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-HD-1260-24 12.6 W/m, IP20 NEW	20	12.6 W/m	K-HD27-1260-24 K-HD30-1260-24 K-HD35-1260-24 K-HD40-1260-24 K-HD50-1260-24