
LED tape K-RGBW-1530-24 15.3 W/m, IP20

Ref. K-RGBW-1530-24

NEW

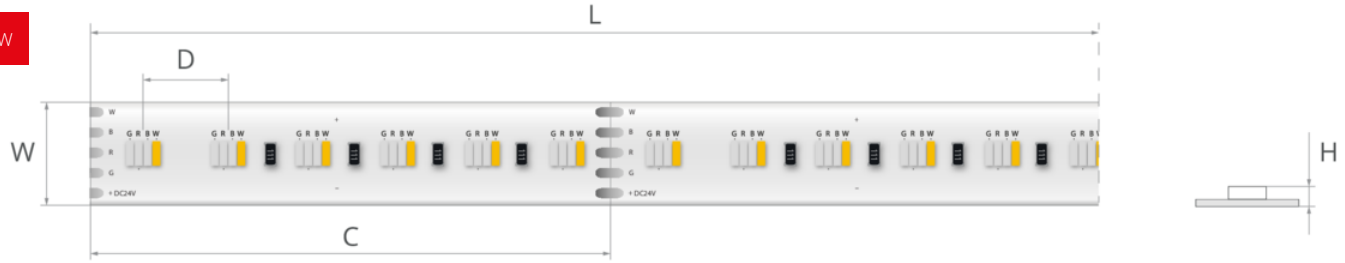

Dimensions: Width [W]: 10 mm | Height [H]: 1.6 mm | Max run length [L] : 4 m | Cut every [C]: 62.5 mm | LED spacing [D]: 10.42 mm

CRI 90+ | IP20 | 24 V | UL LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- UL Listed

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
LED color	**RGB+W**
CRI	**90**
Lumen output	**340 lm/m** **50 lm/m** **330 lm/m** **70 lm/m**
LxBy	**L80B50**
Lifetime	**100000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**15.3 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**96**
Number of LEDs per cut section	**6 pcs**
Warranty [months]	**48**

Color temperature	Ref
3000 K RED GREEN BLUE	**K-RGB30-1530-24**
4000 K RED GREEN BLUE	**K-RGB40-1530-24**
Efficiency	**22 lm/W** **13 lm/W** **86 lm/W** **18 lm/W**

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-14KRGBW-1530-24 15.3 W/m, IP65 NEW	65	15.3 W/m	KWP-14KRGB30-1530-24 KWP-14KRGB40-1530-24
LED tape KWP-RGBW-1530-24 15.3 W/m, IP65 NEW	65	15.3 W/m	KWP-RGB30-1530-24 KWP-RGB40-1530-24

LED tape K-RGBW-1530-24 15.3 W/m, IP20

Ref. K-RGBW-1530-24