
LED tape KWP-14KRGB-1200-24

Ref. KWP-14KRGB-1200-24

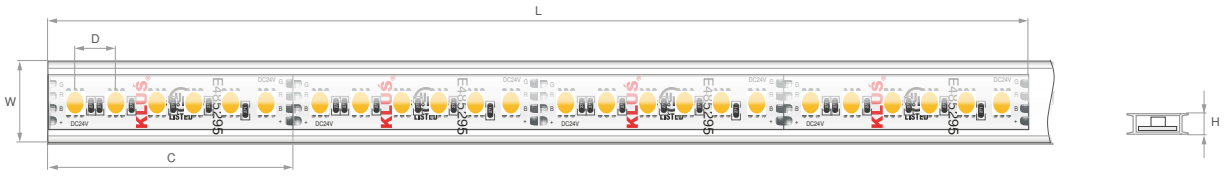

Dimensions: Width [W]: 16.7 mm | Height [H]: 4.6 mm | Max run length [L] : 5 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm

IP65 | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- UL Listed
- For the construction of sealed lighting fixtures

TECHNICAL SPECIFICATIONS

IP protection rating	65
Sealing type	silicone sleeve
LED color	RGB
Lumen output LxBy	82 lm/m 26 lm/m 46 lm/m 10 lm/m L80B50
Lifetime	60000 h
Working temperature	-20°C - 60°C
Input voltage	24 V DC
Power consumption	12 W/m
Beam angle	120°
Number of LEDs per 1 m	120

Number of LEDs per cut section	6 pcs
Energy consumption	12 kWh/1000h
Does not contain mercury and lead	yes
Dimmable	yes
No UV IR radiation	yes
Warranty [months]	48

Color temperature	Efficiency
RED GREEN BLUE	7 lm/W 7 lm/W 12 lm/W 3 lm/W

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

Name	IP protection rating	Power consumption	Ref.
LED tape K-RGB-1200-24	20	12 W/m	K-RGB-1200-24
LED tape KWP-8KRGB-1200-24	65	12 W/m	KWP-8KRGB-1200-24

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

LED tape KWP-14KRGB-1200-24

Ref. KWP-14KRGB-1200-24

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148