
LED tape KWP-3SL-0480-24

Ref. KWP-3SL-0480-24

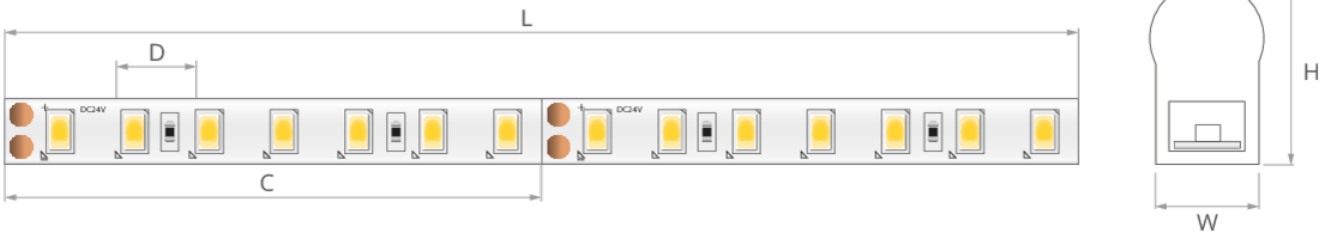

Dimensions: Width [W]: 5 mm | Height [H]: 9 mm | Max run length [L] : 3.5 m | Cut every [C]: 38.5 mm | LED spacing [D]: 4.81 mm

IP65 | Ph Hg | 24 V | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- Many colors of the sealing sleeve, including phosphorescent
- For the construction of sealed lighting fixtures

ADDITIONAL INFORMATION


- NOTE! LED tapes in a silicone sleeve, with a degree of protection IP65 are made to the size specified by the customer only by KLUŚ - if you cut it yourself, the tape will become unsealed, which will result in the loss of the warranty


TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**silicone sleeve**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**4.8 W/m**
Number of LEDs per 1 m	**208**
Number of LEDs per cut section	**8 pcs**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**

Color	Lumen output	Efficiency	Ref
phosphorescent	385 lm/m	80 lm/W	**KWP-3NSL40-0480-24**
orange	105 lm/m	22 lm/W	**KWP-3RSL40-0480-24**
gray	450 lm/m	94 lm/W	**KWP-3YSL40-0480-24**

SAMPLE PROJECTS

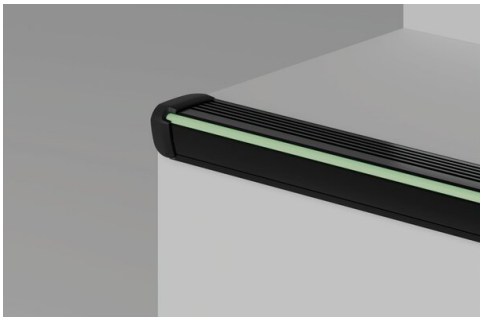

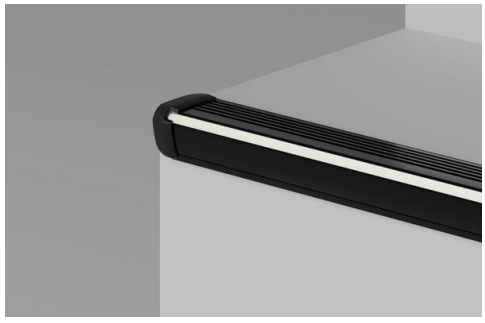

LED tape KWP-3SL-0480-24

Ref. KWP-3SL-0480-24

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148