
LED tape K-18D30-0960-24

Ref. K-18D30-0960-24

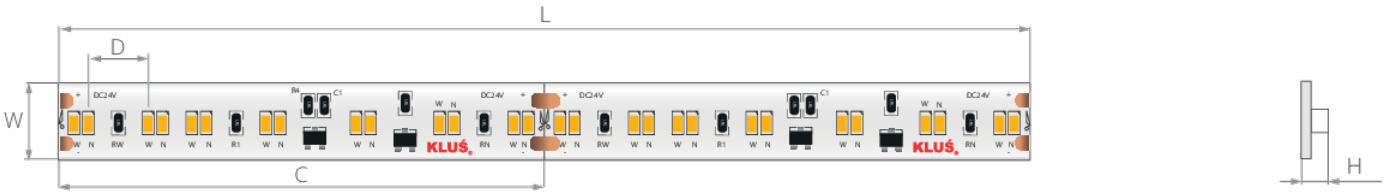

Dimensions: Width [W]: 10 mm | Height [H]: 3.5 mm | Max run length [L] : 5 m | Cut every [C]: 62.5 mm | LED spacing [D]: 6.6 mm

CRI 90+ | IP20 | DTW | Pb Hg | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY | G

- UL Listed
- CRI 90+
- 3-Step MacAdam's ellipse, single binning

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
Only valid for white	**yes**
Lumen output	**730 lm/m**
LxBy	**L70B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.6 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**

Number of LEDs per 1 m	**224**
Number of LEDs per cut section	**14 pcs**
Energy consumption	**12 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
Dim To Warm	**yes**
No UV IR radiation	**yes**
Warranty [months]	**48**
Energy class	**G**

Color temperature	Efficiency
1800...3000 K	**76 lm/W**