
LED tape KWP-14K-0360-24 3.6 W/m, IP65

Ref. KWP-14K-0360-24

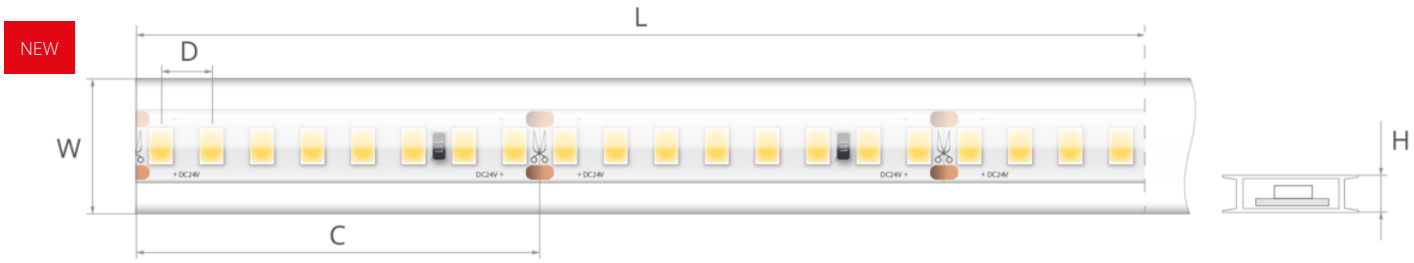

Dimensions: Width [W]: 16.7 mm | Height [H]: 4.6 mm | Max run length [L] : 10 m | Cut every [C]: 50 mm | LED spacing [D]: 6.25 mm

CRI 90+ | IP65 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

- CRI 90+
- Superior color consistency and dimming performance
- Smooth regulation of brightness
- High light transmission of the silicone sleeve (over 93%)

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**silicone sleeve**
CRI	**90**
LxBy	**L80B50**
Lifetime	**75000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**3.6 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**160**
Number of LEDs per cut section	**8 pcs**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
2700 K	555 lm/m	154 lm/W	**KWP-14K27-0360-24**
3000 K	565 lm/m	157 lm/W	**KWP-14K30-0360-24**
3500 K	565 lm/m	157 lm/W	**KWP-14K35-0360-24**
4000 K	565 lm/m	157 lm/W	**KWP-14K40-0360-24**
5000 K	565 lm/m	157 lm/W	**KWP-14K50-0360-24**

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-0360-24 3.6 W/m, IP20 NEW	20	3.6 W/m	K-27-0360-24 K-30-0360-24 K-35-0360-24 K-40-0360-24 K-50-0360-24
LED tape KWP-0360-24 3.6 W/m, IP65 NEW	65	3.6 W/m	KWP-27-0360-24 KWP-30-0360-24 KWP-35-0360-24 KWP-40-0360-24 KWP-50-0360-24

LED tape KWP-14K-0360-24 3.6 W/m, IP65

Ref. KWP-14K-0360-24

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-8K-0360-24 3.6 W/m, IP65 NEW	65	3.6 W/m	KWP-8K27-0360-24 KWP-8K30-0360-24 KWP-8K35-0360-24 KWP-8K40-0360-24 KWP-8K50-0360-24