
LED tape K-BT-0910-24

Ref. K-BT-0910-24

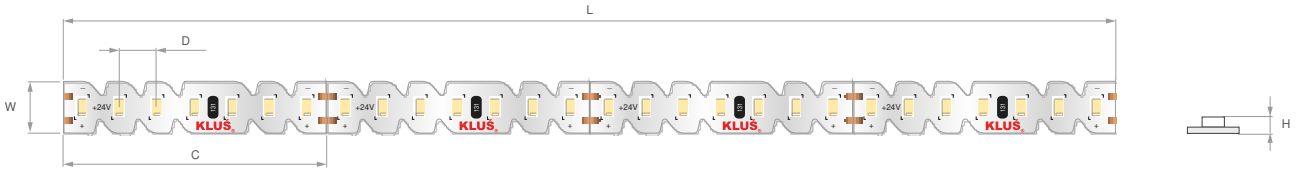

Dimensions: Width [W]: 7 mm | Height [H]: 1.6 mm | Max run length [L] : 4 m | Cut every [C]: 35.7143 mm | LED spacing [D]: 5.1 mm

CRI 90+ | IP20 | 24 V | UL LISTED | RoHS COMPLIANT | 5 YEARS WARRANTY

- UL Listed
- CRI 90+
- Possibility of bending in the light plane

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**90**
LxBy	**L80B50**
Lifetime	**60000 h**
Possibility of bending	**yes**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.1 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**196**
Number of LEDs per cut section	**7 pcs**
Energy consumption	**9 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**60**

Color temperature	Lumen output	Efficiency	Ref
2700 K	780 lm/m	86 lm/W	**K-BT27-0910-24**
3000 K	800 lm/m	88 lm/W	**K-BT30-0910-24**
3500 K	880 lm/m	97 lm/W	**K-BT35-0910-24**
4000 K	925 lm/m	102 lm/W	**K-BT40-0910-24**
5000 K	785 lm/m	86 lm/W	**K-BT50-0910-24**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

LED tape K-BT-0910-24

Ref. K-BT-0910-24

Name	IP protection rating	Ref.
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller RGB+W, Wlightbox 288W IP20	20	E60233
Controller RGB+CCT, Wlightbox	20	E60235
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148