LED tape K-CR-0960-24

Ref. K-CR-0960-24

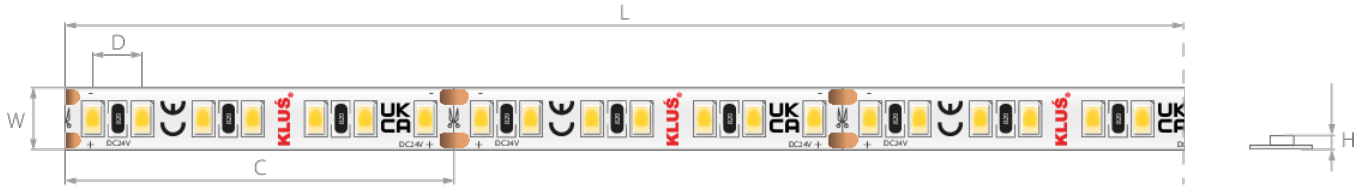

Dimensions: Width [W]: 8 mm | Height [H]: 1.6 mm | Max run length [L] : 5 m | Cut every [C]: 50 mm | LED spacing [D]: 7.14 mm

IP20 | CRI 95+ | 24 V | 7 YEARS WARRANTY

- CRI 95+
- Excellent color rendering

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**95**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**9.6 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**140**
Number of LEDs per cut section	**7 pcs**
Energy consumption	**9.6 kWh/1000h**
Does not contain mercury and lead	**yes**
Closet Rated	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**
Warranty [months]	**84**

Color temperature	Lumen output	Efficiency	Ref
2700 K	855 lm/m	89 lm/W	**K-CR27-**
3000 K	930 lm/m	97 lm/W	**K-CR30-**
3500 K	960 lm/m	100 lm/W	**K-CR35-**
4000 K	1015 lm/m	106 lm/W	**K-CR40-**
5000 K	1025 lm/m	107 lm/W	**K-CR50-**

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235

LED tape K-CR-0960-24

Ref. K-CR-0960-24

Name	IP protection rating	Ref.
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159
Controller LED MONO, Wlightboxs 120W IP20	20	E60228

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148