
LED tape KWP-14KHD-0830-24 8.3 W/m, IP65

Ref. KWP-14KHD-0830-24

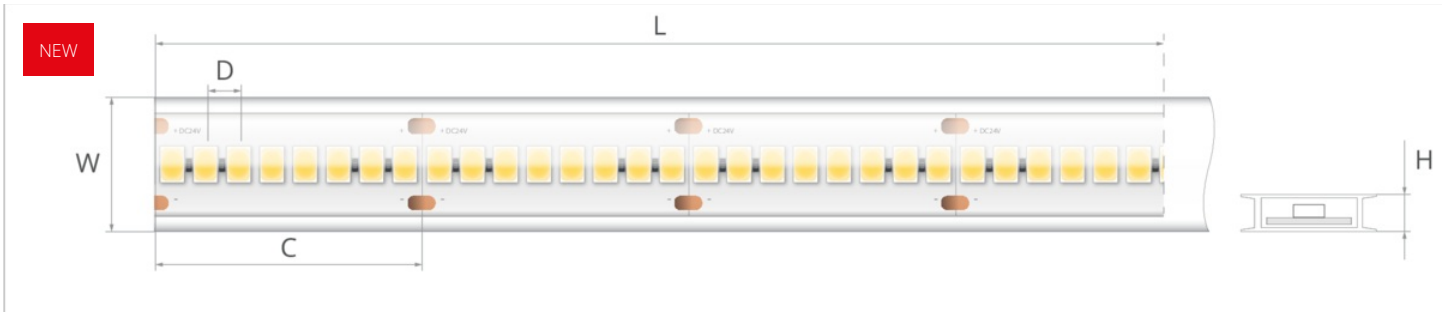

Dimensions: Width [W]: 16.7 mm | Height [H]: 4.6 mm | Max run length [L] : 6 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.81 mm

CRI 90+ | IP65 | 24 V | c UL us LISTED | CE | UKCA | RoHS COMPLIANT | 4 YEARS WARRANTY

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**silicone sleeve**
CRI	**90**
LxBy	**L80B50**
Lifetime	**75000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**8.3 W/m**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**240**
Number of LEDs per cut section	**7 pcs**
Warranty [months]	**48**

Color temperature	Lumen output	Efficiency	Ref
2700 K	1260 lm/m	152 lm/W	**KWP-14KHD27-0830-24**
3000 K	1275 lm/m	154 lm/W	**KWP-14KHD30-0830-24**
3500 K	1275 lm/m	154 lm/W	**KWP-14KHD35-0830-24**
4000 K	1310 lm/m	158 lm/W	**KWP-14KHD40-0830-24**
5000 K	1310 lm/m	158 lm/W	**KWP-14KHD50-0830-24**

RELATED ACCESSORIES > RELATED LED > WHITE MONO

Name	IP protection rating	Power consumption	Ref.
LED tape K-HD-0830-24 8.3 W/m, IP20 NEW	20	8.3 W/m	K-HD27-0830-24 K-HD30-0830-24 K-HD35-0830-24 K-HD40-0830-24 K-HD50-0830-24

LED tape KWP-14KHD-0830-24 8.3 W/m, IP65

Ref. KWP-14KHD-0830-24