LED tape KWP-8KRGB-1200-24

Ref. KWP-8KRGB-1200-24

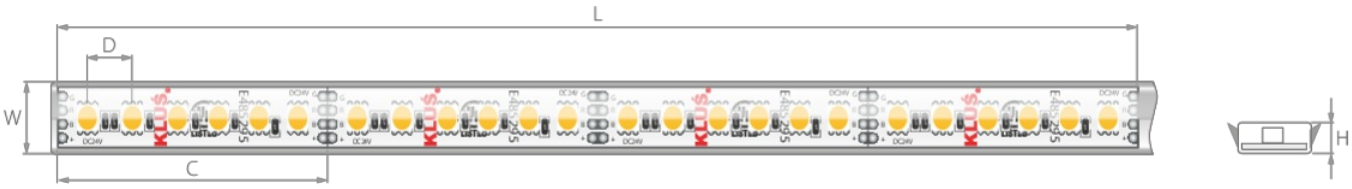

Dimensions: Width [W]: 10.7 mm | Height [H]: 4.1 mm | Max run length [L] : 5 m | Cut every [C]: 50 mm | LED spacing [D]: 8.3 mm

IP65 | 24 V | LISTED | RoHS COMPLIANT

- UL Listed
- For the construction of sealed lighting fixtures
- High light transmission of the silicone sleeve (over 93%)

TECHNICAL SPECIFICATIONS

IP protection rating	**65**
Sealing type	**silicone sleeve**
LED color	**RGB**
Lumen output	**76 lm/m** **24 lm/m** **43 lm/m** **9 lm/m**
LxBy	**L80B50**
Lifetime	**60000 h**
Working temperature	**-20°C - 60°C**
Input voltage	**24 V DC**
Power consumption	**12 W/m**
Beam angle	**120°**
Number of LEDs per 1 m	**120**

Number of LEDs per cut section	**6 pcs**
Energy consumption	**20 kWh/1000h**
Does not contain mercury and lead	**yes**
Dimmable	**yes**
No UV IR radiation	**yes**

Color temperature	Efficiency
RED	**6 lm/W**
GREEN	**6 lm/W**
BLUE	**11 lm/W**
	2 lm/W

RELATED ACCESSORIES > ELECTRONICS > CONTROLLERS

Name	IP protection rating	Ref.
Controller RGB+CCT, Wlightbox NEW	20	E60235
Controller LED MONO\CCT\RGB\RGBW\RGBW+CCT, 5w1, SR5 NEW	20	E62159

LED tape KWP-8KRGB-1200-24

Ref. KWP-8KRGB-1200-24

RELATED ACCESSORIES > ELECTRONICS > CASAMBI CONTROL SYSTEM

Name	IP protection rating	Ref.
Controller LED Casambi CBU-ASD	20	E62147
Controller LED Casambi CBU-PWM4	20	E62148