LED tape K-CRHD-1260-24 12.6 W/m, IP20

Ref. K-CRHD-1260-24

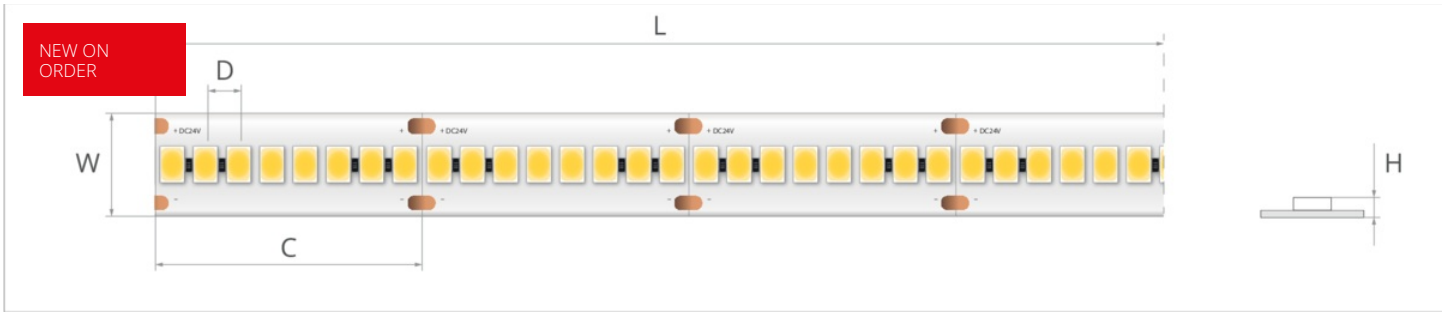

Dimensions: Width [W]: 10 mm | Max run length [L] : 4 m | Cut every [C]: 33.3 mm | LED spacing [D]: 4.81 mm

IP20 | CRI 95+ | 24 V | 5 YEARS WARRANTY | G

- High lighting efficacy
- High density diode placement
- Energy class: G

TECHNICAL SPECIFICATIONS

IP protection rating	**20**
CRI	**0**
LxBy	**L80B50**
Lifetime	**75000 h**
Input voltage	**24 V DC**
Power consumption	**12.6 W/m**
Beam angle	**120°**
MacAdam's ellipse	**3 SDCM**
Number of LEDs per 1 m	**240**
Number of LEDs per cut section	**7 pcs**
Warranty [months]	**60**
Energy class	**G**

Color temperature	Lumen output	Efficiency	Ref
1800 K	1060 lm/m	84 lm/W	**K-CRHD18-1260-24**
2200 K	1460 lm/m	116 lm/W	**K-CRHD22-1260-24**
2700 K	2055 lm/m	163 lm/W	**K-CRHD27-1260-24**
3000 K	2055 lm/m	163 lm/W	**K-CRHD30-1260-24**
3500 K	2065 lm/m	164 lm/W	**K-CRHD35-1260-24**
4000 K	2090 lm/m	166 lm/W	**K-CRHD40-1260-24**
5000 K	2180 lm/m	173 lm/W	**K-CRHD50-1260-24**

RELATED ACCESSORIES > RELATED LED

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-CRHD-1260-24 12.6 W/m, IP65 NEW ON ORDER	65	12.6 W/m	KWP-CRHD18-1260-24 KWP-CRHD22-1260-24 KWP-CRHD27-1260-24 KWP-CRHD30-1260-24 KWP-CRHD35-1260-24 KWP-CRHD40-1260-24 KWP-CRHD50-1260-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO

LED tape K-CRHD-1260-24 12.6 W/m, IP20

Ref. K-CRHD-1260-24

Name	IP protection rating	Power consumption	Ref.
LED tape KWP-14KHD-1260-24 12.6 W/m, IP65 NEW	65	12.6 W/m	KWP-14KHD18-1260-24 KWP-14KHD22-1260-24 KWP-14KHD27-1260-24 KWP-14KHD30-1260-24 KWP-14KHD35-1260-24 KWP-14KHD40-1260-24 KWP-14KHD50-1260-24