
Profile STEKO
Ref. A18018

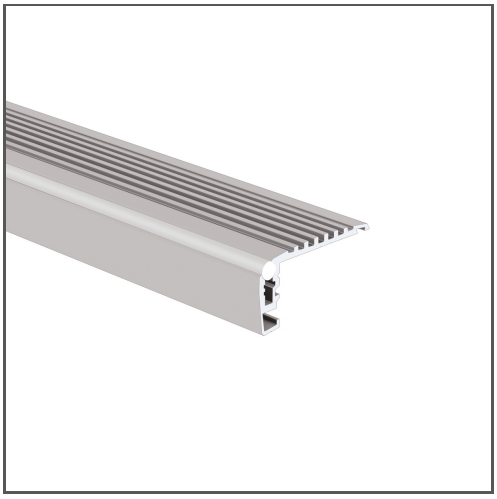

KEY FEATURES

- For installation on the steps
- Non-slip elements

APPLICATION

warning lighting and anti-slip protection on the steps

MOUNTING

to a step, using properly selected screws

ADDITIONAL INFORMATION

- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)


IP PROTECTION RATING

IP20

MOUNTING METHOD

Surface mounted

TECHNICAL DRAWING

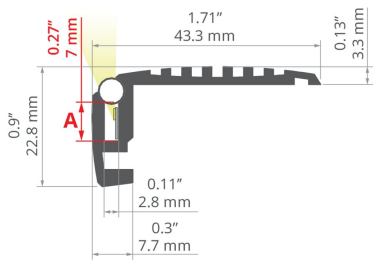

AVAILABLE COLOURS

LENGTH	REF
1000 mm	A18018A07_1
2005 mm	A18018A07_2
3010 mm	A18018A07_3

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	black anodized
Possible fixture IP	20
Possible fixture shapes	linear
Width	43.3 mm
Height	22.8 mm
LED gluing width A	7 mm
Width of the glow	4.46 mm
Max power of a single KLUŚ LED strip	4.8 W/m
Building type	Commercial, Entertainment/ Arts, HoReCa object
Facility zone	stairs / hallways, media rooms / av
Wire out back of extrusion	yes

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
End cap STEKO-90		PP	gray	C24053C02
End cap STEKO-P		PP	black	C24037C07
			gray	C24037C02
End cap STEKO-L		PP	black	C24038C07
			gray	C24038C02