
# Profile KRAV-56

## Ref. A18017AZM

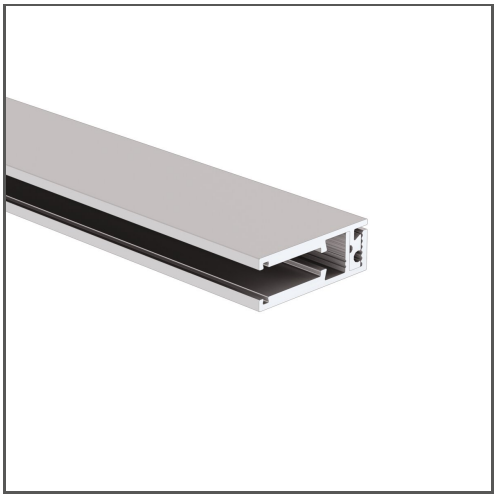

### KEY FEATURES

- Backlight of transparent panels
- Supported panel thicknesses: 5-6 mm - 0.2-0.24"

### APPLICATION

Decorative edge illumination for transparent panels

### MOUNTING

to the edge of the panel, using dedicated double-sided adhesive tape

### ADDITIONAL INFORMATION

- the profile has a decorative function, it is not a construction profile
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

Standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)


### IP PROTECTION RATING

IP20

### MOUNTING METHOD

Surface mounted

### TECHNICAL DRAWING




### AVAILABLE COLOURS

| LENGTH | REF |
|---|---|
| 1000 mm | A18017AZM_1 |
| 2005 mm | A18017AZM_2 |
| 3010 mm | A18017AZM_3 |

### TECHNICAL SPECIFICATIONS

| | |
|---|---|
| Material | aluminum |
| Color | silver anodized |
| Possible fixture IP | 20 |
| Possible fixture shapes | linear |
| Profile cross-section | rectangular |
| Width | 10 mm |
| Height | 25 mm |
| LED gluing width A | 7 mm |
| Width of the glow | 5 mm |
| Max power of a single KLUŚ LED strip | 9.6 W/m |
| Building type | Entertainment/ Arts, Retail, HoReCa object |
| Facility zone | exhibition / tradeshow / display, decorative, edge lighting |
| Wire out back of extrusion | yes |

### RELATED ACCESSORIES > END CAPS

| NAME | | MATERIAL | COLOR | REF. |
|---|---|---|---|---|
| End cap KRAV-56 |  | PP | gray | C28001C02 |

### RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CCT

| NAME | KEY FEATURES | IP PROTECTION RATING | POWER CONSUMPTION | REF. |
|---|---|---|---|---|
| LED tape K-RGB-1560-24 | - RGB | 20 | 15.7 W/m | K-RGB-1560-24 |