Hermetic coupler THB.381, 2pin


Ref. C28125C07




IP68

- Small dimensions
- Connecting wires does not require the use of specialized tools
- Connection of plug and socket on "click"

TECHNICAL DRAWING

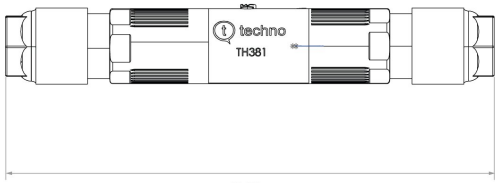



TECHNICAL SPECIFICATIONS

Material	PA
IP protection rating	68
Rated current	10 A
Length	90 mm
Diameter	14 mm
Weight	0.016 kg
Minimum working temperature	-40°C
Maximum working temperature	125°C
Nominal voltage	400 V
Color	black
Number of clamps	2
Minimum rated connectivity	0.25 mm²
Maximum rated connectivity	1.5 mm²

Min. suitable cable diameter	6.9 mm
Min. suitable cable diameter	5.9 mm

Hermetic coupler THB.381, 2pin

Ref. C28125C07

RELATED PROFILES > SURFACE MOUNTED



Profile 45-16
A08504



Profile GIZA
A05556



Profile GIZA-LL
A00758



Profile LIPOD
A05554



Profile MICRO-H
A00599



Profile MICRO-PLUS
A02966



Profile PDS-4-PLUS
A01263



Profile PDS-H
A09204



Profile PIKO
A08288



Profile REGULOR
A18068



Profile ROGER
A06885



Profile SILER
A09325




Profile STEP
A18042



Profile STEPUS
A18038



Profile STOS-ALU
A04369




Profile TRIADA
A04476

Hermetic coupler THB.381, 2pin

Ref. C28125C07

RELATED PROFILES > TRIMLESS



Profile FASKO
A04323



Profile KOZEL
A06454



Profile KOZEL-50
A00757



Profile KOZMA
A18040



Profile KOZUS
A07823



Profile KOZUS-50
A00958



Profile PDS-T
A02057

RELATED PROFILES > RECESSED



Profile LARKO
A05552



Profile LARKO-50
A00756



Profile LOKOM
A05553




Profile MICRO-NK
A01587



Profile OPAC-30
A06164



Profile PDS-NK
A01588



Profile POR
A06144



Profile TRIADA-K
A04477

Hermetic coupler THB.381, 2pin

Ref. C28125C07

RELATED PROFILES > SUSPENDED



Profile LIPOD-50
A02609



Profile OLEK
A08505



Profile PIKO-ZM
A01168

RELATED PROFILES > RECESSED WITH SUSPENSION FUNCTION



Profile OPK-4
A00370

RELATED PROFILES > WALL MOUNTED



Profile PLAKIN-DUO
A18069



Profile PAC-ALU
A04370