Hermetic coupler THB.391.A5A, 5 pin


Ref. C28156C07




IP68

- Tight connection of five-core cables
- Connecting wires does not require the use of specialized tools

TECHNICAL DRAWING

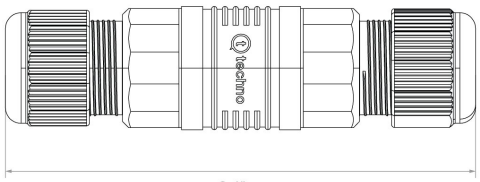



TECHNICAL SPECIFICATIONS

Material	**PA**
IP protection rating	**68**
Rated current	**17.5 A**
Length	**86 mm**
Diameter	**23 mm**
Weight	**0.037 kg**
Nominal voltage	**450 V**
Color	**black**
Number of clamps	**5**
Minimum rated connectivity	**0.25 mm²**
Maximum rated connectivity	**1.5 mm²**

Min. suitable cable diameter	**12 mm**
Min. suitable cable diameter	**7 mm**

Hermetic coupler THB.391.A5A, 5 pin

Ref. C28156C07

RELATED PROFILES > SURFACE MOUNTED



Profile 45-16
A08504



Profile GIZA
A05556



Profile GIZA-LL
A00758



Profile LIPOD
A05554



Profile MICRO-H
A00599



Profile MICRO-PLUS
A02966



Profile PDS-4-PLUS
A01263



Profile PDS-H
A09204



Profile PIKO
A08288



Profile REGULOR
A18068



Profile ROGER
A06885



Profile SILER
A09325




Profile STEP
A18042



Profile STEPUS
A18038



Profile STOS-ALU
A04369




Profile TRIADA
A04476

Hermetic coupler THB.391.A5A, 5 pin

Ref. C28156C07

RELATED PROFILES > TRIMLESS



Profile FASKO
A04323



Profile KOZEL
A06454



Profile KOZEL-50
A00757



Profile KOZMA
A18040



Profile KOZUS
A07823



Profile KOZUS-50
A00958



Profile PDS-T
A02057

RELATED PROFILES > RECESSED



Profile LARKO
A05552



Profile LARKO-50
A00756



Profile LOKOM
A05553




Profile MICRO-NK
A01587



Profile OPAC-30
A06164



Profile PDS-NK
A01588



Profile POR
A06144



Profile TRIADA-K
A04477

Hermetic coupler THB.391.A5A, 5 pin

Ref. C28156C07

RELATED PROFILES > SUSPENDED



Profile LIPOD-50
A02609



Profile OLEK
A08505



Profile PIKO-ZM
A01168

RELATED PROFILES > RECESSED WITH SUSPENSION FUNCTION



Profile OPK-4
A00370

RELATED PROFILES > WALL MOUNTED



Profile PLAKIN-DUO
A18069



Profile PAC-ALU
A04370