
Canopy BOX-KS600

Ref. C24669





- Completed set of items
- Compartment for driver and electrical components
- Aesthetic masking for electrical components
- Easy maintenance
- Simple and convenient installation of the luminaire by one installer

APPLICATION

- mounting of power supplies and electronic components

MOUNTING

- recessed, by bending out the spring arm
- easy installation and deinstallation of pressed-in fixtures

ADDITIONAL INFORMATION

- the power supply can be secured inside the profile using dedicated accessories

TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS


Material	**aluminum**
IP protection rating	**20**
Length	**600 mm**
Width	**86 mm**
Height	**46.9 mm**
Lifting capacity	**2.8 kg**

Color	Ref
■ black lacquered	**C24669L07**
□ white lacquered	**C24669L10**

Canopy BOX-KS600
Ref. C24669

KLUŚ Inspiring Solutions

SAMPLE PROJECTS

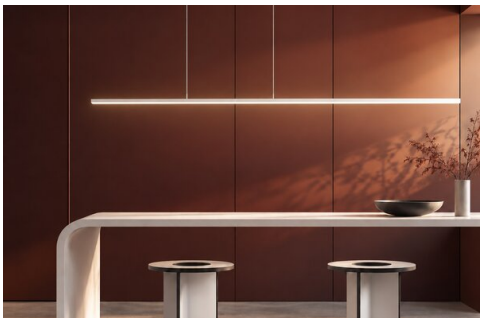



RELATED PROFILES > SUSPENDED

NEW

Profile INTER-PLUS
A18078

NEW

Profile PIKO-DUO
A00022


Profile 3035
A18039


Profile 4050
A18050


Profile GIZA-DUO-LL
A02162


Profile GLAZA-DUO
A03059


Profile GLAZA-LL
A02627


Profile JAZ
A08547


Profile JAZ-DUO
A00788


Profile OLEK
A08505


Profile PDS-ZMG
A01418


Profile PIKO-ZM
A01168

Canopy BOX-KS600
Ref. C24669

KLUŚ Inspiring Solutions

RELATED PROFILES > SURFACE MOUNTED



Profile GIZA
A05556



Profile GIZA-LL
A00758



Profile MICRO-PLUS
A02966




Profile PDS-4-PLUS
A01263



Profile PIKO-O
A01167



Profile REGULOR
A18068



Profile SEPOD
A06593

RELATED PROFILES > RECESSED WITH SUSPENSION FUNCTION



Profile OPK-4
A00370



Profile PDS-ZM-PLUS
A02056