

Low Voltage: Path Lights (Shade)

Solid Brass – Architectural Models



ORB



MBL



PL-H-BR-ORB-1



PL-H-BR-MBL-1



PL-H-BR-ORB-2



PL-H-BR-MBL-2



PL-H-BR-ORB-3



PL-H-BR-MBL-3



Spike
Included

Detail Specifications:

- Finish: Oil Rubbed Bronze or Matte Black
- Housing: Corrosion Resistant Solid Brass
- Lamp Type:
 - G4 Bulbs 12V (not included)
 - 35W Halogen Max
 - LED bulbs available
- IP Rating: Wet Location IP65
- Lens: Clear glass

Applications:

- Landscape
- Walkways & Pathways
- Security Lighting
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial

Product Information:

- Heat resistant glass lens
- Water tight silicone ring for waterproofing
- Stem Options: 12" or 24" Height
- Shade Options: various options available
- Stem and shade sold separately
- Packaging: Retail color box
- Master box quantity: 10pcs.

Driver Options:

- Compatible with 12V Low Voltage Drivers

Mounting & Installations:

- Wire: 6' (72") SPT-1W 18 gauge wire lead
- Spike: 8.3" Non-metallic spike included
 - Optional brass spike available
- Sold brass pipe with 1/2" knuckle stem

Warranty:

- Lifetime Anti-Corrosion Warranty

Oil Rubbed Bronze Stem Options

PL-12-BR-ORB-12V
12" Height
PL-24-BR-ORB-12V
24" Height

Oil Rubbed Bronze Shade Options

PL-H-BR-ORB-1
Style 1
PL-H-BR-ORB-2
Style 2
PL-H-BR-ORB-3
Style 3

Matte Black Stem Options

PL-12-BR-MBL-12V
12" Height
PL-24-BR-MBL-12V
24" Height

Oil Rubbed Bronze Shade Options

PL-H-BR-MBL-1
Style 1
PL-H-BR-MBL-2
Style 2
PL-H-BR-MBL-3
Style 3

1 Bulb Options

LED-G4WP-1.5W-SW
2700K
LED-G4WP-1.5W-WW
3000K
LED-G4WP-1.5W-CW
4000K
LED-G4WP-2.5W-SW
2700K
LED-G4WP-2.5W-WW
3000K
LED-G4WP-2.5W-CW
4000K
LED-G4WP-3.5W-SW
2700K
LED-G4WP-3.5W-WW
3000K
LED-G4WP-3.5W-CW
4000K

Optional Accessories on Page 3


Specs and model numbers are subject to change with or without notice. Customization of product is available.




Low Voltage: Path Lights (Shade)

Solid Brass – Architectural Models

FEATURES

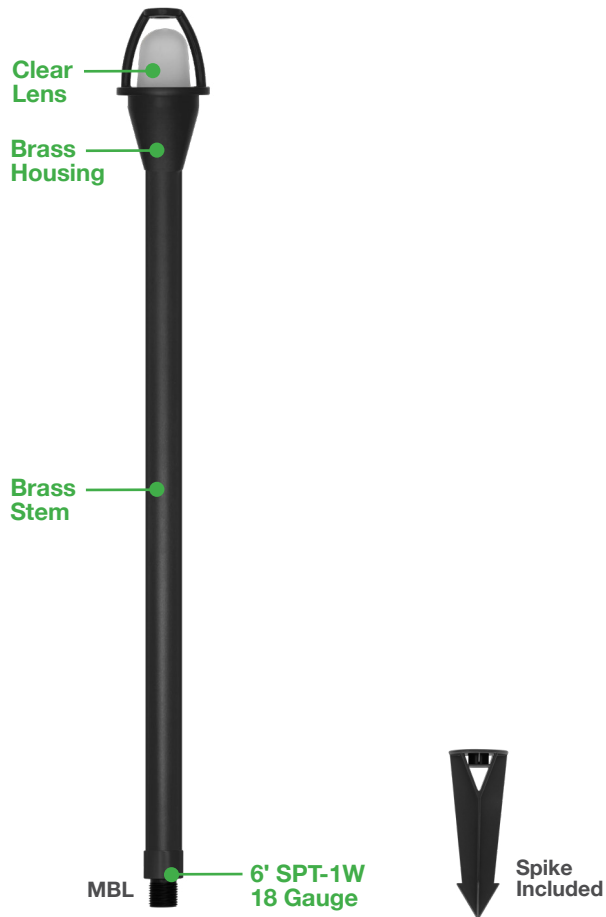

DIMENSIONS

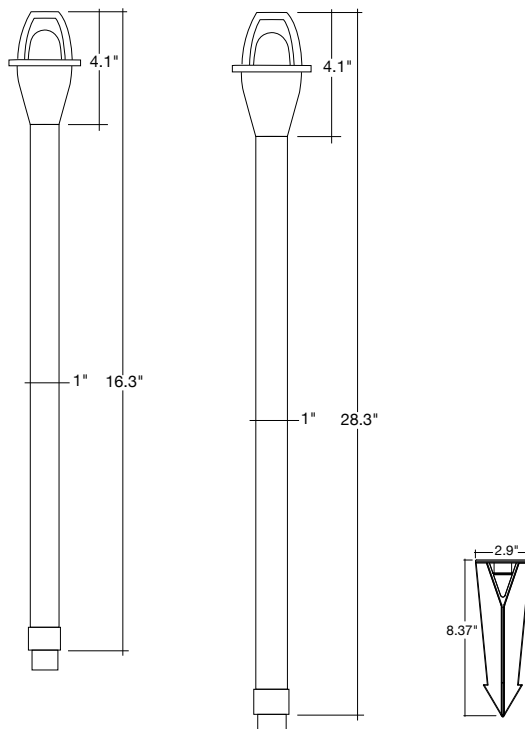



Low Voltage: Path Lights (Shade)

Solid Brass – Architectural Models



LED-G4WP-1.5W-SW
LED-G4WP-1.5W-WW
LED-G4WP-1.5W-CW



LED-G4WP-2.5W-SW
LED-G4WP-2.5W-WW
LED-G4WP-2.5W-CW



LED-G4WP-3.5W-SW
LED-G4WP-3.5W-WW
LED-G4WP-3.5W-CW



STK-HD-1/2-BR



SM-1/2-BR-ORB



SM-1/2-BR-MBL



SM-1/2-ALM-BZ




SM-1/2-ALM-BL



SM3-1/2-BR-ORB



SM3-1/2-BR-MBL



STKC-1/2-BR-ORB



STKC-1/2-BR-MBL



PL-AT-1/2-ALM-BZ



PL-AT-1/2-ALM-BL

Model	Voltage	Color
PL-12-BR-ORB-12V	12V	Oil Rubbed Bronze
PL-24-BR-ORB-12V	12V	Oil Rubbed Bronze
PL-12-BR-MBL-12V	12V	Matte Black
PL-24-BR-MBL-12V	12V	Matte Black

BULBS

Model	Voltage	Watts	Lumens	Color
LED-G4WP-1.5W-SW	12V AC/DC	1.5w	110	2700k
LED-G4WP-1.5W-WW	12V AC/DC	1.5w	110	3000k
LED-G4WP-1.5W-CW	12V AC/DC	1.5w	110	4000k
LED-G4WP-2.5W-SW	12V AC/DC	2.5w	210	2700k
LED-G4WP-2.5W-WW	12V AC/DC	2.5w	210	3000k
LED-G4WP-2.5W-CW	12V AC/DC	2.5w	210	4000k
LED-G4WP-3.5W-SW	12V AC/DC	3.5w	280	2700k
LED-G4WP-3.5W-WW	12V AC/DC	3.5w	280	3000k
LED-G4WP-3.5W-CW	12V AC/DC	3.5w	280	4000k

STAKE

Model	Voltage
STK-HD-1/2-BR	Brass Stake 10" Heavy Duty

SURFACE MOUNT

Model	Description
SM-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)
SM-1/2-ALM-BZ	Aluminum 1/2" Surface Mount (Bronze)
SM-1/2-ALM-BL	Aluminum 1/2" Surface Mount (Black)

TREE MOUNT

Model	Description
SM3-1/2-BR-ORB	Brass Stake 10" Heavy Duty (Oil Rubber Bronze)
SM3-1/2-BR-MBL	Brass 1/2" Surface Mount (Matte Black)

STAKE COVER

Model	Description
STKC-1/2-BR-ORB	Brass Stake Cover(Oil Rubbed Bronze)
STKC-1/2-BR-MBL	Brass Stake Cover(Matte Black)

PATH LIGHT COVER

Model	Description
PL-AT-1/2-ALM-BZ	Path Light Cover (Bronze)
PL-AT-1/2-ALM-BL	Path Light Cover (Black)