

bruck

LONDON

Canopy, Track E26



820 clear



821 red



822 blue



824 aqua



825 amber

DESCRIPTION

- Bruck's European and American Artisan, mouth-blown glass is known throughout the world for its quality and beauty. Several light source options, mounting options, colors and finishes allow for a unique design.

HOUSING

- The pendant is offered in matte chrome or chrome finish.

MOUNTING

- The pendant can be mounted from Bruck's field adjustable canopy and accepts medium base lamping options. The standard overall cable length of 10' can be field-cut or specified when ordering. See the decorative Junction Box Cover for open ceiling applications.
- Optional track mounting: Global Trac Systems, GEO track, ECO track / HALO® Power Trac track, and Zonyx track.

LISTING

- ETLus listed to UL1598 and UL1574 (Suitable for dry locations)
- cETL listed to CSA 22.2 #250.0 and #250.570

PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			



ORDERING CODE


LIGHT SOURCE	LE26	E26 socket
SHADE COLOR	820 821 822 824 825	clear red blue aqua amber
FINISH	BK CH MC	black chrome matte chrome
MOUNTING OPTIONS	PBK PMC PWH ECOHBK ECOHMC ECOHWH ECOJBK ECOJWH GEOBK GEOHC GEOWH ZONMC	canopy, black with black cable canopy, matte chrome with black cable canopy, white with white cable ECO/HALO black with black cable ECO/HALO matte chrome with black cable ECO/HALO white with white cable JUNO black with black cable JUNO white with white cable GEO black with black cable GEO matte chrome with black cable GEO white with white cable Zonyx matte chrome with black cable

ORDERING CODE

Follow the steps to specify your fixture, example:
LE26 - 824 - BZ - ECOHBK

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

MOUNTING OPTIONS

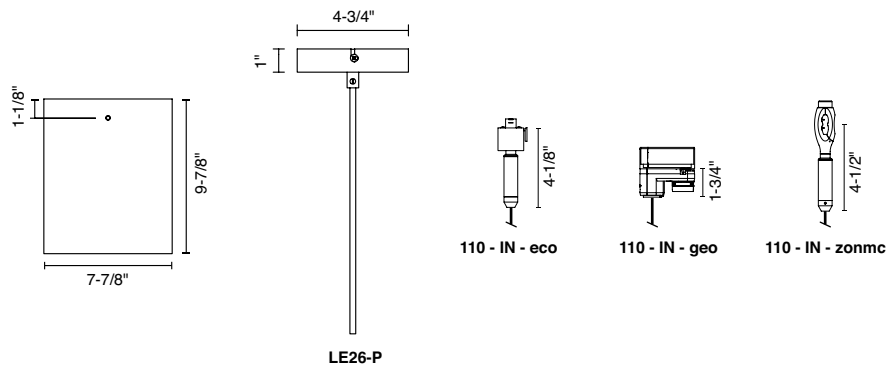

LIGHT SOURCE

Light Source	LE26 - E26 Socket
Performance	
LED	Lamp dependent
Lumens	
CCT	
SDCM	
CRI	
Lumen Maintenance	
Technical Specs	
Socket Listing	• Medium E26 base socket • ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting	
Canopy	• 120Vac input • 100W, 100VA (max 100W lamp) • Dimmable (with compatible lamp) • Mount to 3-1/2" - 4" round J-Box
Line Voltage Track	• 120Vac input • 100W, 100VA (max 100W lamp) • Dimmable (with compatible lamp) • Connects to line voltage adapter (ECO, GEO, Zonyx)
Warranty	• 1 year limited fixture warranty

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

VINTAGE LED LAMPS FOR E26 BASE SOCKETS

- Amber Glass Lamp with Thread LED
- Integrated Driver-Free System
- Suitable for Damp Locations
- Smooth Dimming System*
- 25,000 Hours Warranty
- 95% Energy Savings

*Compatible with most electronic low voltage (ELV) dimmers



	LED Globe Lamp		LED Edison Lamp	LED Tubular Lamp
Ordering Code	LMP-G4030022K1	LMP-G2518022K1	LMP-ED2118022K1	LMP-TB1030022K1
Type	G40	G25	ST21	T10
Base	E26	E26	E26	E26
Delivered Lumens	350lm	350lm	200lm	350lm
Wattage	3.5W (60W equivalent)	3.5W (60W equivalent)	2.0W (40W equivalent)	3.5W (60W equivalent)
Maximum Overall Length (MOL)	7.0"	4.5"	5.4"	7.56"
Maximum Overall Diameter (MOD)	5.0"	3.15"	2.45"	1.25"
CCT	2200K	2200K	2200K	2200K
	 