


LED ARCHITECTURAL LINKABLE LINEAR - WALL MOUNT KIT LR42631


IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.

BOX CONTENTS


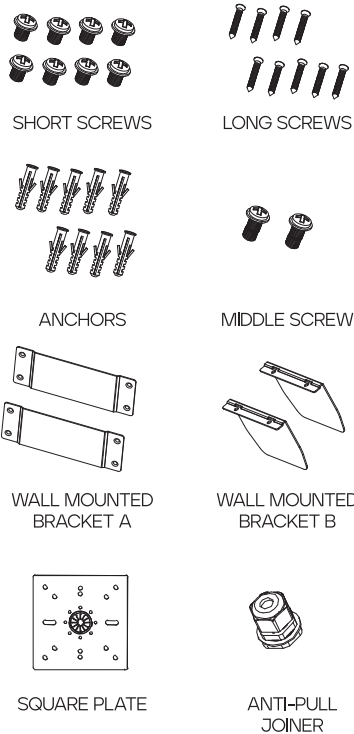


CAUTION BEFORE INSTALLATION

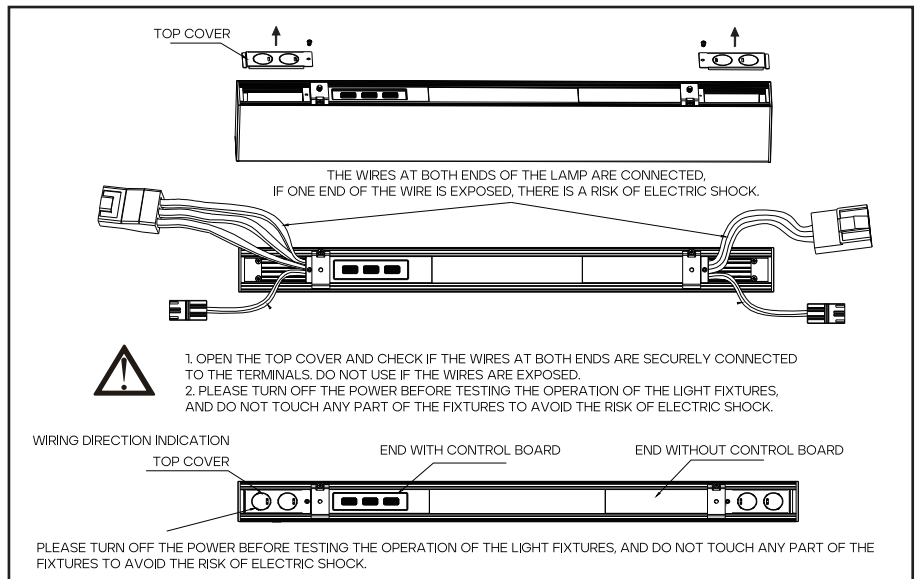


INSTRUCTIONS


1. Turn off the power, pass the power cord through the square plate and connect to line voltage, then secure the square plate to junction-box with short screws.
2. Mark a straight line at the mounting wall surface.

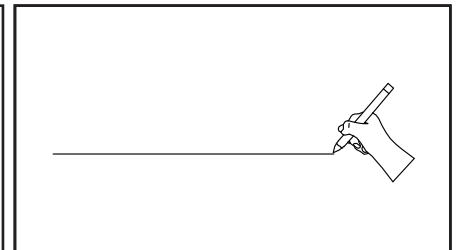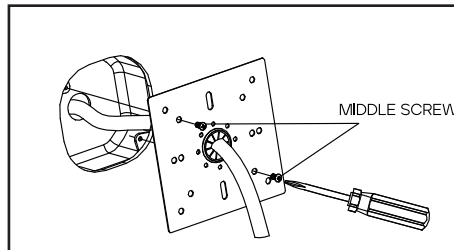

3. Align wall-mounted bracket A with the marked line, mark positions and drill holes. Fix bracket A onto the mounting wall.

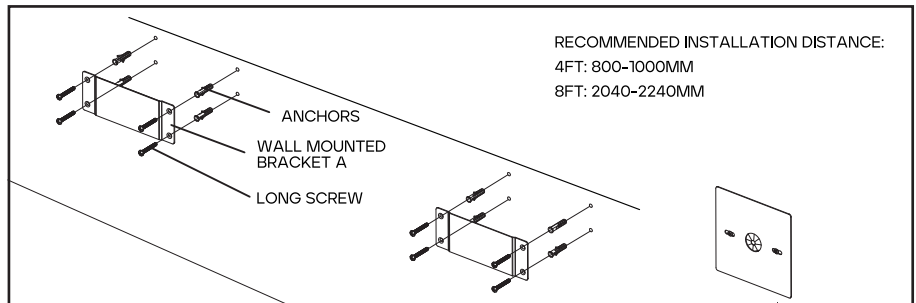




4. Attach wall mounted bracket B to fixture with small screw according to distance of wall mounted bracket A.

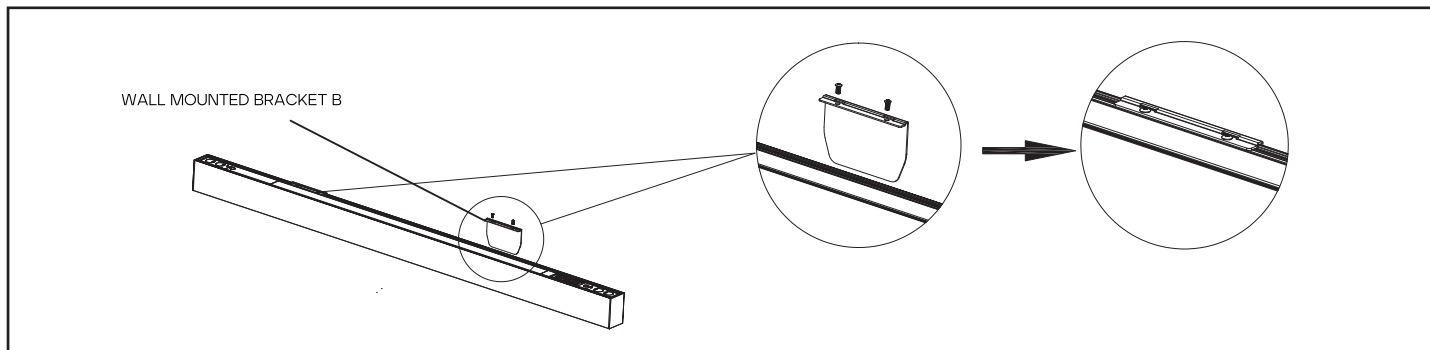


5. Insert wall mounted bracket B to wall mounted bracket A.

6. Remove the top cover from one end of the fixture.


7. Cut off the corresponding terminals as required.

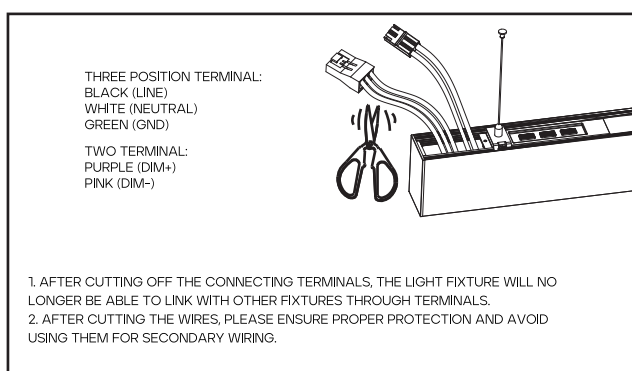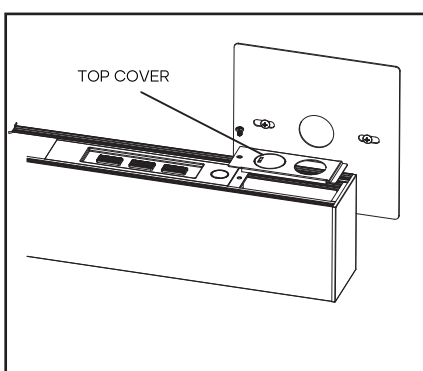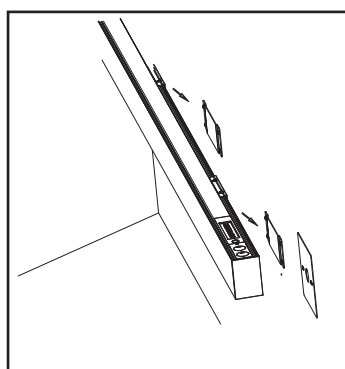

WIRING

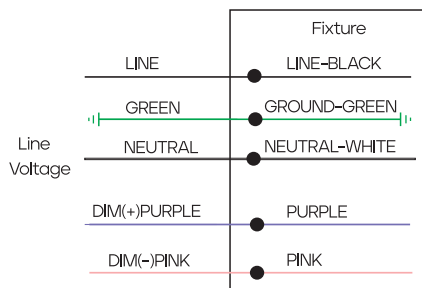


8. Wire according to the wiring diagram on the left for completion.

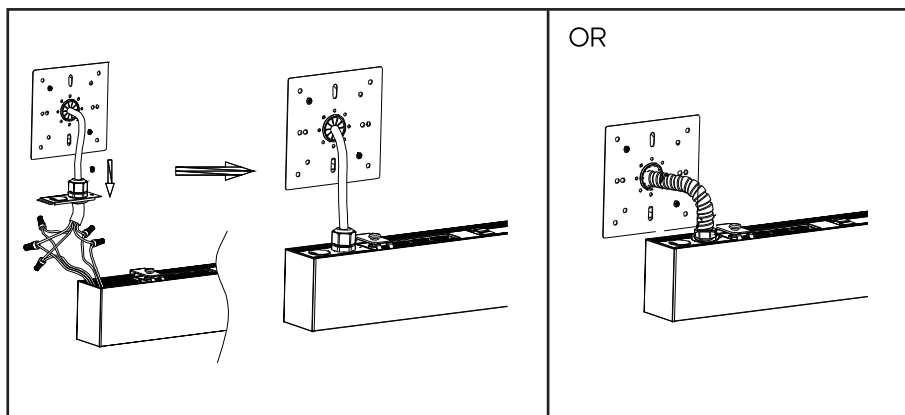


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


9. Drill hole above the fixture and insert anchor to secure with screw. Installation is now complete.

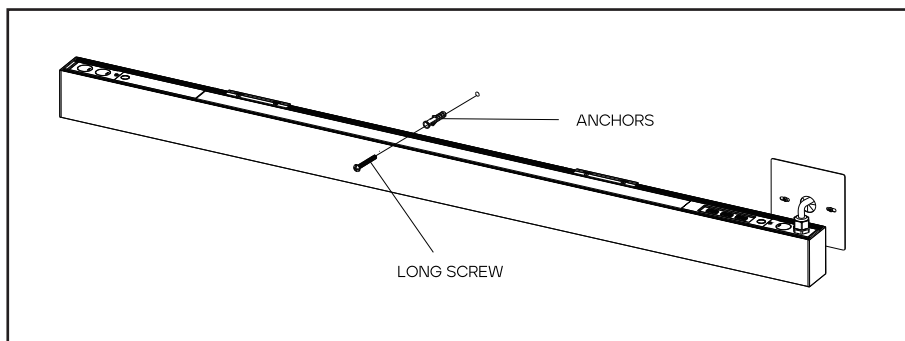

WIRING

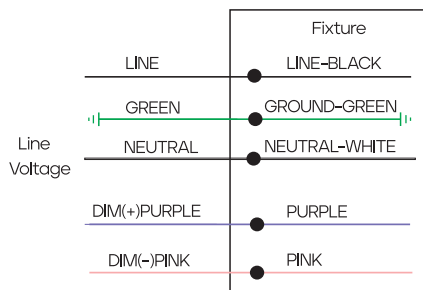

INPUT WIRING GROUP (OPTIONAL)



WIRE NUTS




TIES



WIRE ACCESSORIES

1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation

1. Wire according to the wiring diagram on the left for completion.

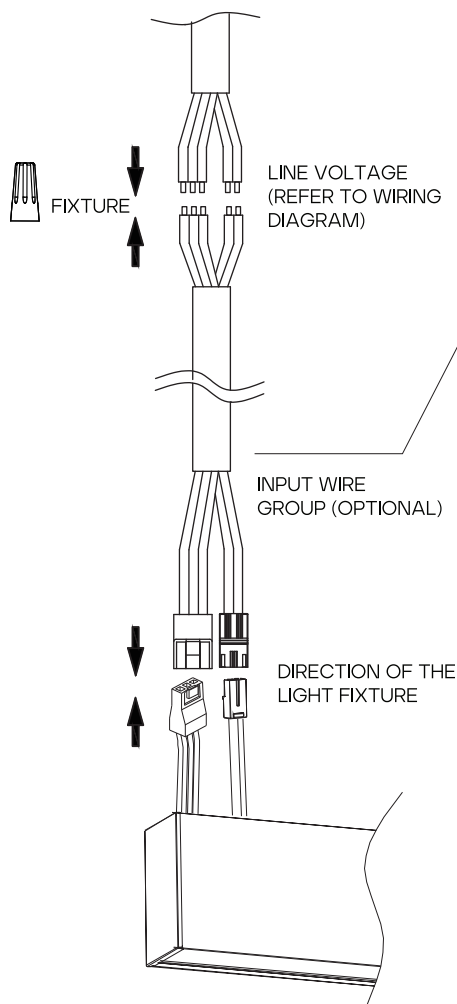

THREE TERMINALS: NEUTRAL WIRE, LIVE WIRE, GROUND WIRE.
TWO TERMINAL: DIM+ (PURPLE), DIM- (PINK)

