

DALI DT6 & DT8 DECODER

5-Channel LED DALI Decoder


Controlling LED tape light using DALI has never been easier. The 5 channel DALI DT6 & DT8 Decoder is designed to work with tunable white, RGB, RGBW & RGB+TW luminaires. Configure and address using a DALI master controller or the manual programming buttons on the front display.

- Built-in DALI-2 interface, DALI DT8 mulit-address enabled control gear
- Numeric digital display for configuration settings and manual DALI addressing
- 5 channels of PWM constant voltage output via DT8 device commands
- Supports both DT6 and DT8 device commands
- Multi-functional, 7-in-1 color types: Tc, RGBWAF, XY, 2*Tc, XY+W (DT6)
- Single-address device types: Tc, RGBWAF, XY
- Multi-address device types: 2*Tc, XY+Tc, RGB+Tc, XY+W (DT6)
- Color temperature and RGB color control through stand alone, push dim mode without DALI control



DALI DT6 & DT8 DECODER QUICK SPECS	
INPUT VOLTAGE	12-36V DC
CONTROL	DALI DT6 & DT8
OPERATING TEMP	-20°C to 50°C (-4°F to 122°F)
RATING	TUV Listed; RoHS Compliant; IP20 for dry locations, DALI-2 Certified, CE, FCC
OUTPUT	5x 5A PWM
DALI CONSUMPTION	2mA

DALI DT6 & DT8 DECODER QUICK DIMENSIONS

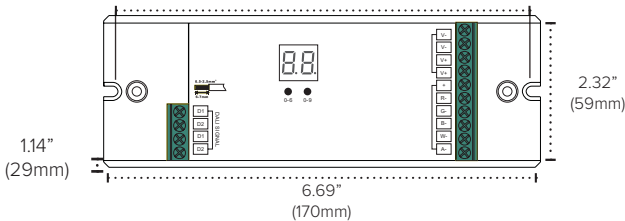


PROJECT:

TYPE:

LOCATION:

CATALOG NUMBER:

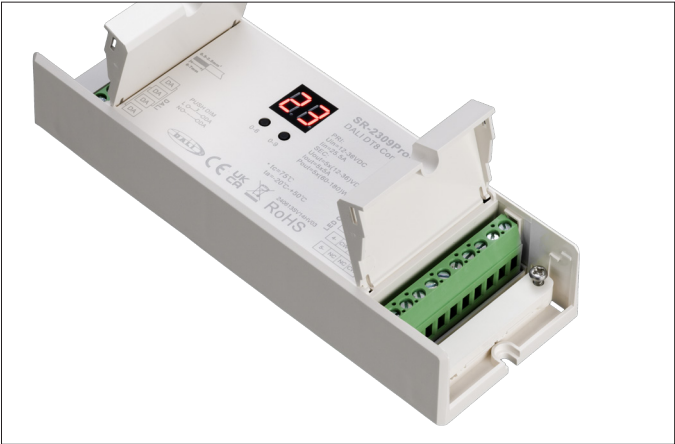

DALI DT6 & DT8 DECODER ORDERING INFORMATION					
ITEM NUMBER	DESCRIPTION	OUTPUT	VOLTAGE	CONTROL	RATING
AML-DEC-DALI-5CH	DALI-2 Certified DT8 5-Channel 12-36VDC CV LED Decoder (5CH X 5A)	5x 5A PWM	12-36V DC	DALI DT6 & DT8	TUV Listed; RoHS Compliant; IP20 for dry locations, DALI-2 Certified, CE, FCC



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.