

# bruck

## wUNDERCAB

CCT Select, 120V



Direct Connect



Standard three selectable CCT 3000K, 3500K, 4000K



BZ



WH

### DESCRIPTION

The LED wUndercab by Bruck is a low profile LED line voltage under cabinet light offered in 120V. It is offered in 5 lengths to accommodate standard under cabinet sizes. wUndercab has ZERO pixelation with premium and efficient opal diffuser for even illumination. This direct wire or plug in under cabinet task fixture can be directly connected or with a flex connector available in lengths from 6" to 72". Easy access key hole door with knockouts. A standard occupancy sensor integrated wire box is offered with 3 way switching. Rocker switch is in 120V only. Available in white or antique bronze finishes. wUndercab carries the first 5 Year FIXTURE WARRANTY.

### HOUSING

- Extruded aluminum housing with rear knockouts for wiring.

### MOUNTING

- Quick installation via captive screws.

### ELECTRICAL/CONTROLS

- 120Vac, 50/60Hz input, Electronic 60V driver
- Linkable up to 300W
- 485 lumens per foot
- Protections: Short circuit, over current, over voltage, over temperature
- 120V dimmable (incandescent)
- Recommended, Lutron DV-600P (tested) or comparable

### LISTINGS

- ETLus Listed to UL1598 and UL153 (suitable for dry locations only)
- cETL Listed to CSA C22.2 #250.0 and #9.0
- JA8, Title 24 certified (2019 standard)
- Energy Star certified

### LED INFO

- 2835H LED:
- SDCM: 3-step MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance:  $L_{70} > 50,000$  hrs

### PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			



LM-79

### ORDERING CODES

PART NUMBER	138546	LED
LENGTH	8	8-3/4"
	12	12-3/8"
	16	16-3/8"
	24	24-3/8"
	32	32-3/8"
CCT	3CCT	3000K 3500K 4000K
CRI	90	90 CRI
VOLTAGE	120	120V
FINISH	WH BZ	white bronze

### ORDERING CODE


Follow the steps to specify your fixture, example:

**138546 - 16 - 3CCT - 90 - 120 - WH**

LENGTH (INCH)	LUMENS (LM)	POWER (W)
8-3/4"	360	6
12-3/8"	485	8
16-3/8"	650	10
24-3/8"	980	14
32-3/8"	1350	18

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			


PRODUCT DIMENSIONS

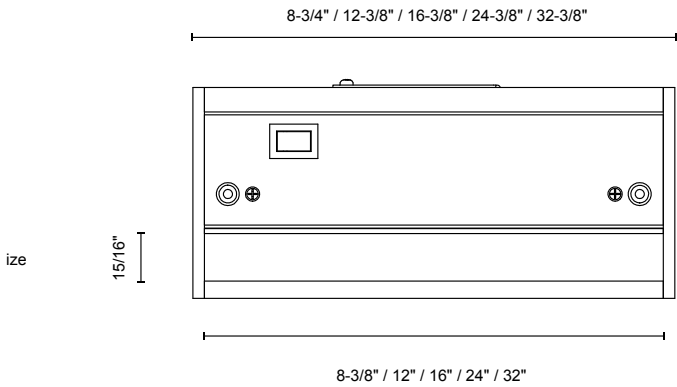

Available in 5 sizes:  
8-3/4", 12-3/8", 16-3/8", 24-3/8", 32-3/8"

Knockout located at center of all lengths

Dimensions



ACCESSORIES

Accessories

- |          |                               |
|----------|-------------------------------|
| 138521BK | 6" flexible connector, black  |
| 138522BK | 12" flexible connector, black |
| 138523BK | 24" flexible connector, black |
| 138524BK | 72" flexible connector, black |
| 138521WH | 6" flexible connector, white  |
| 138522WH | 12" flexible connector, white |
| 138523WH | 24" flexible connector, white |
| 138524WH | 72" flexible connector, white |
| 138526BK | 72" power feed, black         |
| 138526WH | 72" power feed, white         |
| 138527BK | 72" plug-in feed, black       |
| 138527WH | 72" plug-in feed, white       |



Flexible Connector

Technical Specs:  
120Vac



Plug-In Power Feed

Technical Specs:  
120Vac



Power Feed

Technical Specs:  
120Vac

Connectors<sup>1</sup>



End-to-end      MC flex

NOTES  
1. End-to-end connector and MC flex connector included with each fixture.