

JOB NAME _____

CONTACT _____

ORDERING CODE _____


ELV Dimming Driver 18W, 26W, 36W LED




| ORDERING CODE | | |
|---------------|--------|---------------------|
| PART NUMBER | P70418 | LED driver with box |
| CURRENT | 350 | 18W, 350mA |
| | 500 | 26W, 500mA |
| | 700 | 36W, 700mA |

ORDERING CODE _____

Follow the steps to specify your fixture, example:
P70418 - 500



Driver

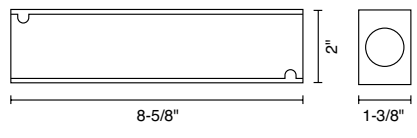

Box

- DESCRIPTION**
- Trailing Edge (ELV) dimmable protocol LED Drive with 10% dimming
 - Remote mounting distance up to 10' (20AWG), 15' (18AWG) to LED load
 - LED load: first LED to last LED 20' "wired in series" circuit

- TECHNICAL SPECS**
- 120-277Vac, 50/60Hz input
 - 36W, 26W, 18W max output
 - 350-700mA DC constant current output
 - Trailing Edge (ELV) 10% dimming
 - Operating temperature: -4°F to 140°F
 - Class II rated
 - Suitable for use in damp and dry locations
 - Short circuit protection
 - Overload protection
 - Over-voltage protection
 - Thermal protection
 - Box: Length = 8-5/8", Width = 2", Height = 1-3/8"
 - Driver: Length = 5-1/4", Width = 1-1/2", Height = 1-1/4"