

ECC-060-UD

Constant Current UNIV 5 in 1 dimming

Plastic Suitable For Dry And Damp Location Enclosure

Single Circuit: **3-65VDC**

Total Wattage: **60W max**


Input Voltage: **100-277V 50/60Hz**



www.emcod.com



Conforms to UL STD. 8750
Certified to CSA
STD. C22.2 No 250.13

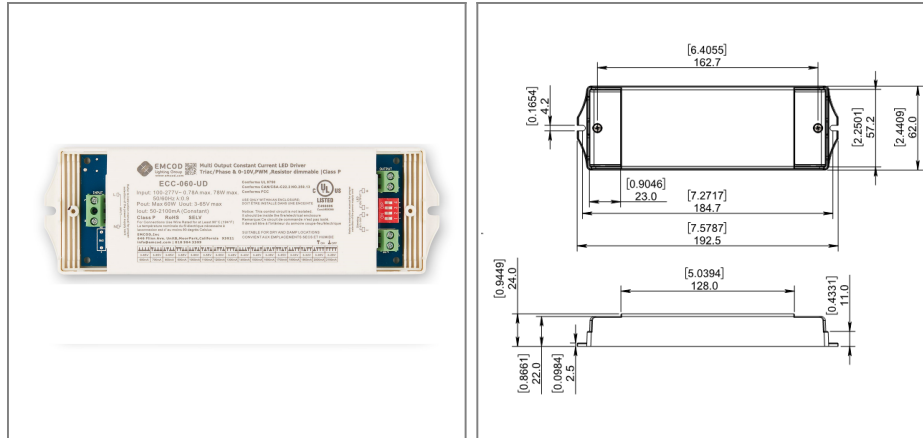

Transformer

Dimmable with triac forward and reverse phase, 0/1-10V , resistor, PWM
Temperature class B(130°C)

Housing

The actual transformer 60W is encapsulated in the enclosure
The enclosure is Plastic suitable for dry and damp location, IP20, wire
compartment is optional rated
Enclosure Temperature does not exceed 65°C at 45°C ambient and fully
loaded

Dimensions (inch): H = 2.4, W = 7.6, D = 0.95

Weight (LBs): 0.66

Electrical Parameters

Input Voltage: **100-277V 50/60Hz**

Max. input current at full load: **0.78A**

Output voltage without load: **65VDC**

Output voltage fully loaded: **VDC**

Max. Total Wattage: **60W**

Max. Output Current: **2.1A**

Efficiency: **83%**

Output	Rated current (A)	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1
	DIP Code	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111
	DIP Code	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111	1111
	Current Tolerance	±5%															
	DC Voltage (V)	3-65V				3-60	3-55	3-50	3-46	3-43	3-40	3-38	3-35	3-33	3-32	3-30	3-39
	Rated power (W)	39	45.5	52	58.5	60											

Mailing Address: 646 Flinn Ave. Unit B, Moorpark , CA 93021 Tech support: Arik Nirenberg phone: 818-904-3309
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com