

JOB NAME _____

CONTACT _____

ORDERING CODE _____

DMX Dimming Driver 50W LED



DESCRIPTION

- 3 separately controllable LED outputs
- Hybrid HydraDrive: provides the smoothest flicker-free high-performance dimming to zero for every fixture

TECHNICAL SPECS


- 120-277Vac, 50/60Hz input
- 50W max output
- 350-1050mA DC constant current output per channel
- 2-55Vdc output per channel
- 0% dimming - 3 channel output
- DMX compatible
- Operating temperature: -4°F to 122°F
- Class II rated
- Suitable for use in damp and dry locations
- Short circuit protection
- Overload protection
- Over-voltage protection
- Thermal protection
- 3 year warranty
- Box: Length = 9", Width = 4", Height = 1-3/8"
- Driver: Length = 5-1/8", Width = 3", Height = 1-1/4"

ORDERING CODE


PART NUMBER	P70470 LED driver with box	
CURRENT	350	350mA
	500	500mA
	700	700mA
	1050	1050mA

ORDERING CODE _____

Follow the steps to specify your fixture, example:
P70470 - 500

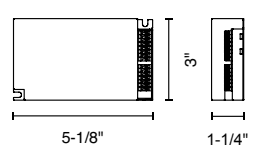

Powerdrive 562/A

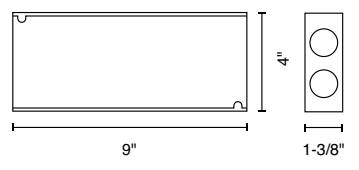

Box