

NEW CONSTRUCTION DESCRIPTION

6" Dedicated IC housing is available for New Construction and Remodel applications and suitable for direct contact with insulation. Air-Tight construction reduces energy costs by reducing the amount of air leakage through the ceiling.

REMODEL SPECIFICATIONS

Construction:

- Four remodel clips secure housing and accommodates $\frac{1}{2}$ " and $\frac{5}{8}$ " ceiling materials
- Housing adjusts from $\frac{5}{8}$ " to $1\frac{1}{8}$ " to accommodate various ceiling thicknesses

NEW CONSTRUCTION SPECIFICATIONS

Construction:

- Galvanized steel construction with removable housing for easy access to the junction box
- Pre-installed nails in bar hangers easily install in regular and engineered lumber joints
- Adjustable bar hangers from $13\frac{3}{8}$ " – 25" and can be repositioned 90° on plaster frame

FEATURES:


- Contains one (1) $1\frac{1}{8}$ ", six (6) $\frac{5}{8}$ " and four (4) romex pry-outs with strain relief
- UL listed for Damp Locations
- UL listed for feed-through/through-branch circuit wiring
- Certified under ASTM-E283 for air-tight construction
- Meets state of California Title 24 Requirements
- Features quick-connect adapter

Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____




Dimensions

Remodel

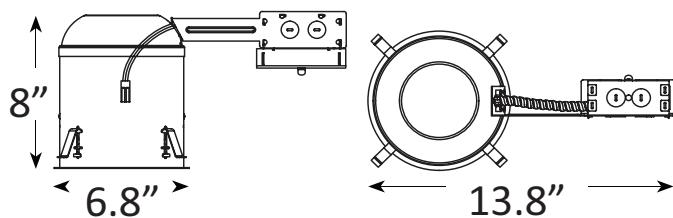

New Construction

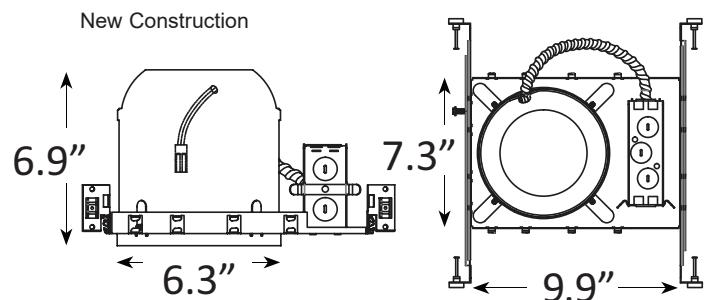

Ordering Information

SKUs	Description
BL9ICLED-NND	6" IC LED Recessed housing for new construction
BL9ICLED-RND	6" IC LED Recessed housing for remodel applications