

Liteline | LUNA SLOPE



Designed specifically for sloped or vaulted ceilings, the LUNA Slope delivers vertical illumination on angled ceilings. Featuring a 30° angled trim with regressed optics for glare control, it provides comfortable light with architectural precision. Ideal for residential and commercial spaces, the LUNA Slope also offers color temperature selectability for flexibility throughout any environment.



LUNA 4" SLOPE



DELIVERED

Up to 1070 lm

WATTAGE

7W / 9W / 12W

TRIM FINISH



BEAM ANGLES



TRIM




COLOR TEMPERATURE



Selectable
27, 30, 35, 40, 50 K



Dim-to-Warm
30 K-20 K

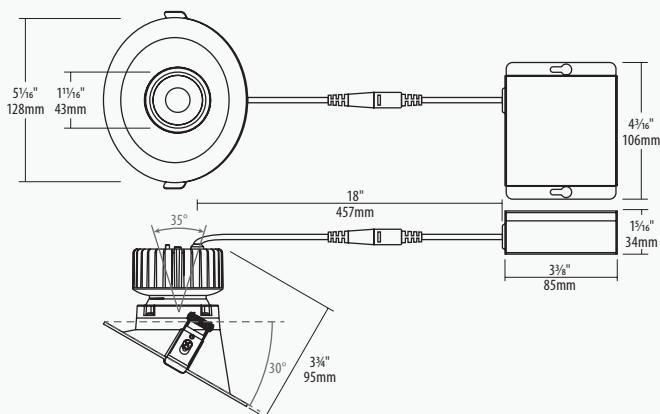

ROOF PITCH	ANGLE
3/12	14.04°
4/12	18.43°
5/12	22.62°
6/12	26.57°
7/12	30.26°
8/12	33.69°
9/12	36.37°
10/12	39.81°
11/12	42.51°
12/12	45.00°
13/12	47.29°

Note: Roof pitch range achieved by a fixed 30° trim and 35° gimbal.

ACCESSORIES



SLM-60-FC
60° Flexible connector, for use with SlimLED, SKYE, and LUNA fixtures.



P-4020
4 1/4" Round pre-mounting plate with driver attachment clip, for 4" LUNA fixtures.



P-4020NC
4 1/4" Round new construction plate with driver attachment clip, for 4" LUNA fixtures.



P-NCMK-1
New construction mounting kit. Includes hanger bars, brackets and screws.



VBE-1/2/3/4/5
Vapour barrier extender. For use in remodel or new construction applications.



LC-CRTL-3WAY-1
OnCloud Smart Wi-Fi 3-Way Switch, compatible with WiZ App.



LC-CRTL-DIM-1
OnCloud Smart Wi-Fi dimmer, 120V, compatible with WiZ App.



M-LUNASLOPE-SS-E
REV 12.10.25