

LED SURFACE MOUNT SLIM SERIES - ADJUSTABLE PIR SENSOR BI-LEVEL & STANDARD OPTION 5", 7", 12"



5"



STANDARD MS FEATURE

0% **STANDBY BRIGHTNESS**

2 MINS
HOLD TIME
100% BRIGHTNESS

7"





BI-LEVEL MS FEATURE

20% **STANDBY BRIGHTNESS**

2 MINS
HOLD TIME
100% BRIGHTNESS

12"

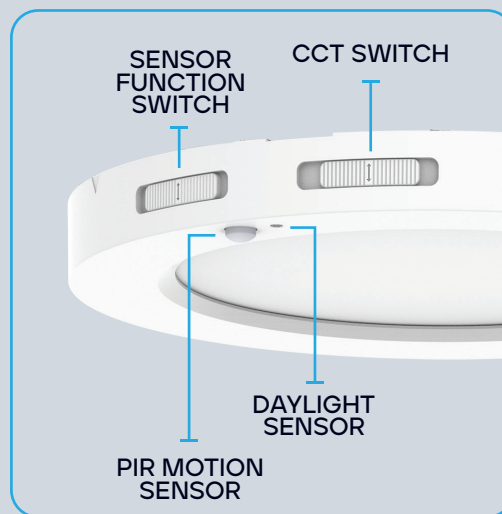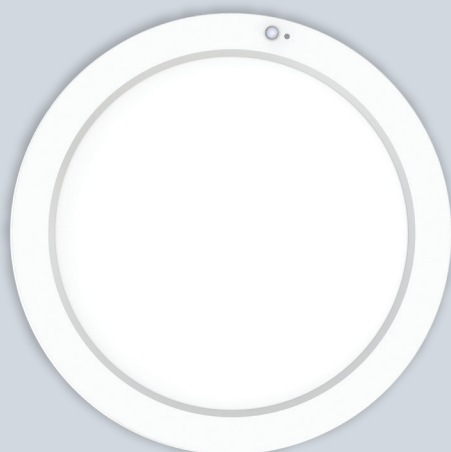

SENSOR
FUNCTION
SWITCH

CCT SWITCH

PIR MOTION
SENSOR

DAYLIGHT
SENSOR

CRI
90

COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

DIMMABLE
TRIAC
10%-100%

120V

BI-LEVEL
MOTION
SENSOR

DAMP
LOCATION
RATED

5
YEAR
WARRANTY

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY	LIFETIME	COST/YR
5"	LR23584	LED12/SLIM5/5CCT/W/RD/Bi/APIR/PC	12	120V	TRIAC	83	50,000	\$ 1.80
7"	LR23585	LED13/SLIM7/5CCT/W/RD/Bi/APIR/PC	13	120V	TRIAC	85	50,000	\$ 2.16
12"	LR23587	LED23/SLIM12/5CCT/W/RD/Bi/APIR/PC	23	120V	TRIAC	87	50,000	\$ 2.89

PHOTOMETRIC



MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	ETL	TITLE 24	ENERGY STAR
LR23584	LED12/SLIM5/5CCT/W/RD/Bi/APIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	110°	90	YES	YES	YES
LR23585	LED13/SLIM7/5CCT/W/RD/Bi/APIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1100	110°	90	YES	YES	YES
LR23587	LED23/SLIM12/5CCT/W/RD/Bi/APIR/PC	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2000	110°	90	YES	YES	

MOTION SENSOR SETTINGS

"BI-LEVEL FUNCTION": BI-LEVEL MOTION SENSOR

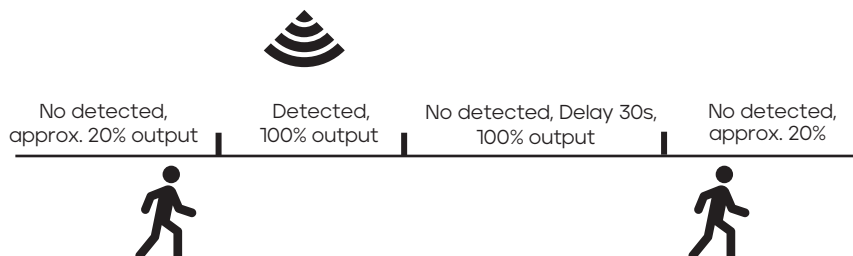

"ON/OFF" FUNCTION: ON/OFF MOTION SENSOR.

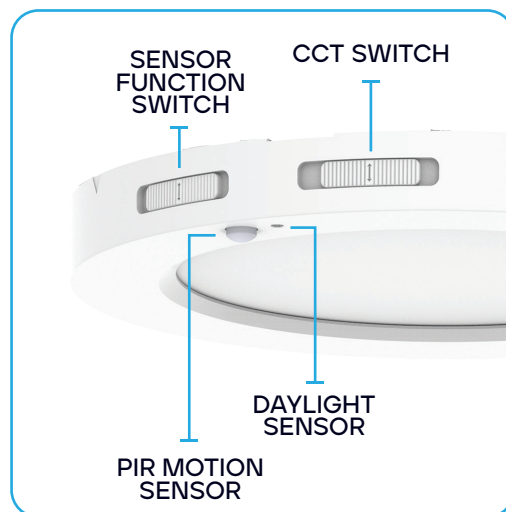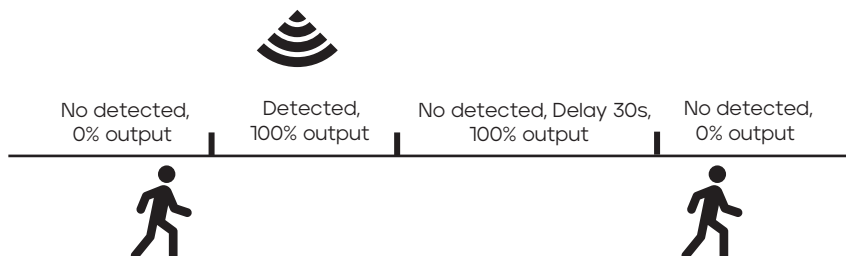

MOTION SENSOR FUNCTION:

OFF - No sensor function.
BI-LEVEL: Enables Bi-Level Motion Sensor
ON/OFF: Enables Standard Motion Sensor

DIMENSIONS

