

LED WAREHOUSE ADJUSTABLE SLIM LINEAR Highbay - CCT & WATTAGE SELECTABLE 1X1, 1X2, 1X3



0-30° ADJUSTABLE LIGHT DISTRIBUTION

1X1

SUSPENSION KIT INCLUDED

150W
80W | 110W | 150W

1X2

SUSPENSION KIT INCLUDED

220W
165W | 190W | 220W

1X3

SUSPENSION KIT INCLUDED

260W
180W | 230W | 260W

EMERGENCY + MOTION SENSOR
OPTION ALSO AVAILABLE

LR41700+EM
LR41705+EM

LR41705+EM+MS

LR41700+MS
LR41705+MS



COLOR SELECTABLE

3000K | 3500K | 4000K | 5000K

WATTAGE
SELECTABLE

3 OPTIONS

DIMMABLE

0-10V



*OPTION
AVAILABLE



*OPTION
AVAILABLE



4KV
SURGE
PROTECTOR



DAMP
LOCATION
RATED



5
YEAR
WARRANTY

ELECTRICAL




	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR	EMERGENCY TIME	MOTION SENSOR
1X1	LR41700	LEDASLHB1X1/3WO/4CCT/WT/D	80	120-277V	140	50,000	\$ 18.06		
			110						
			150						
	LR41700+EM	LEDASLHB1X1/3WO/4CCT/WT/D+EM	80	120-277V	140	50,000	\$ 18.06	90 MINS	
			110						
			150						
	LR41700+MS	LEDASLHB1X1/3WO/4CCT/WT/D+MS	80	120-277V	140	50,000	\$ 18.06		BI-LEVEL
			110						
			150						
	LR41700+EM+MS	LEDASLHB1X1/3WO/4CCT/WT/D+EM+MS	80	120-277V	140	50,000	\$ 18.06	90 MINS	BI-LEVEL
			110						
			150						
1X2	LR41705	LEDASLHB1X2/3WO/4CCT/WT/D	165	120-277V	140	50,000	\$ 26.49		
			190						
			220						
	LR41705+EM	LEDASLHB1X2/3WO/4CCT/WT/D+EM	165	120-277V	140	50,000	\$ 26.49	90 MINS	
			190						
			220						
	LR41705+MS	LEDASLHB1X2/3WO/4CCT/WT/D+MS	165	120-277V	140	50,000	\$ 26.49		BI-LEVEL
			190						
			220						
	LR41705+EM+MS	LEDASLHB1X2/3WO/4CCT/WT/D+EM+MS	165	120-277V	140	50,000	\$ 26.49	90 MINS	BI-LEVEL
			190						
			220						
1X3	LR41710	LEDASLHB1X3HO/3WO/4CCT/WT/D	180	120-277V	184	50,000	\$31.31		
			230						
			260						
	LR41710+EM	LEDASLHB1X3HO/3WO/4CCT/WT/D+EM	180	120-277V	184	50,000	\$31.31	90 MINS	
			230						
			260						
	LR41710+MS	LEDASLHB1X3HO/3WO/4CCT/WT/D+MS	180	120-277V	184	50,000	\$31.31		BI-LEVEL
			230						
			260						
	LR41710+EM+MS	LEDASLHB1X3HO/3WO/4CCT/WT/D+EM+MS	180	120-277V	184	50,000	\$31.31	90 MINS	BI-LEVEL
			230						
			260						

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL LISTED	DLC
LR41700	LEDASLHB1X1/3WO/4CCT/WT/D	3000K	CCT SELECT	12,000 – 80W	80	YES	S-3V5QNL
		3500K		15,000 – 110W			
		4000K					
		5000K		20,500 – 150W			
LR41700+EM	LEDASLHB1X1/3WO/4CCT/WT/D+EM	3000K	CCT SELECT	12,000 – 80W	80	YES	S-3V5QNL
		3500K		15,000 – 110W			
		4000K					
		5000K		20,500 – 150W			
LR41700+MS	LEDASLHB1X1/3WO/4CCT/WT/D+MS	3000K	CCT SELECT	12,000 – 80W	80	YES	S-3V5QNL
		3500K		15,000 – 110W			
		4000K					
		5000K		20,500 – 150W			
LR41700+EM+MS	LEDASLHB1X1/3WO/4CCT/WT/D+EM+MS	3000K	CCT SELECT	12,000 – 80W	80	YES	S-3V5QNL
		3500K		15,000 – 110W			
		4000K					
		5000K		20,500 – 150W			
LR41705	LEDASLHB1X2/3WO/4CCT/WT/D	3000K	CCT SELECT	24,000 – 165W	80	YES	S-I6G4EV
		3500K		27,000 – 190W			
		4000K					
		5000K		30,000 – 220W			
LR41705+EM	LEDASLHB1X2/3WO/4CCT/WT/D+EM	3000K	CCT SELECT	24,000 – 165W	80	YES	S-I6G4EV
		3500K		27,000 – 190W			
		4000K					
		5000K		30,000 – 220W			
LR41705+MS	LEDASLHB1X2/3WO/4CCT/WT/D+MS	3000K	CCT SELECT	24,000 – 165W	80	YES	S-I6G4EV
		3500K		27,000 – 190W			
		4000K					
		5000K		30,000 – 220W			
LR41705+EM+MS	LEDASLHB1X2/3WO/4CCT/WT/D+EM+MS	3000K	CCT SELECT	24,000 – 165W	80	YES	S-I6G4EV
		3500K		27,000 – 190W			
		4000K					
		5000K		30,000 – 220W			

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL LISTED	DLC
LR41710	LEDASLHB1X3HO/3WO/4CCT/WT/D	3000K	CCT SELECT	32,000 – 180W	80	YES	S-3B3822
		3500K		40,000 – 230W			
		4000K		48,000 – 260W			
		5000K		48,000 – 260W			
LR41710+EM	LEDASLHB1X3HO/3WO/4CCT/WT/D+EM	3000K	CCT SELECT	32,000 – 180W	80	YES	S-3B3822
		3500K		40,000 – 230W			
		4000K		48,000 – 260W			
		5000K		48,000 – 260W			
LR41710+MS	LEDASLHB1X3HO/3WO/4CCT/WT/D+MS	3000K	CCT SELECT	32,000 – 180W	80	YES	S-3B3822
		3500K		40,000 – 230W			
		4000K		48,000 – 260W			
		5000K		48,000 – 260W			
LR41710+EM+MS	LEDASLHB1X3HO/3WO/4CCT/WT/D+EM+MS	3000K	CCT SELECT	32,000 – 180W	80	YES	S-3B3822
		3500K		40,000 – 230W			
		4000K		48,000 – 260W			
		5000K		48,000 – 260W			

DIMENSIONS

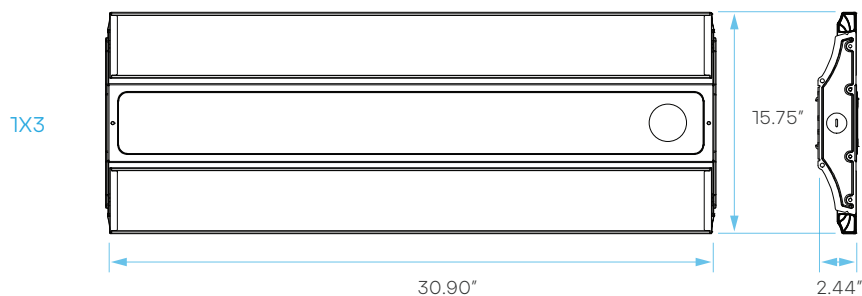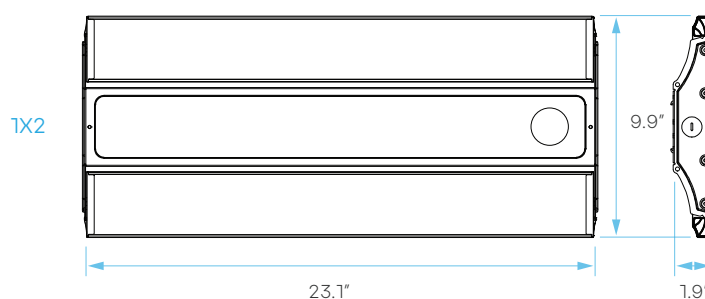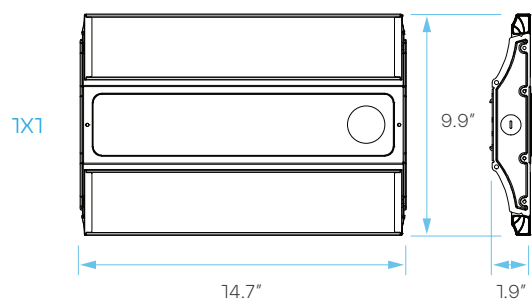

MOTION SENSOR



LUXSMART
BY **LUXRITE.**

LR41704

*SOLD SEPARATELY



LR41706

*SOLD SEPARATELY



LR41706-1

*SOLD SEPARATELY



LR25189

WORKS WITH LR41706

*SOLD SEPARATELY



LR41707

WORKS WITH LR41706-1

*SOLD SEPARATELY




LR35126 - SPECIFICATIONS

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	FREQUENCY	INPUT CURRENT	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35126	LED/EMR/15W/AC/SF/E	15	100-347V	50/60Hz	100mA	12W max	170V DC	24Hr	90min

AMBIENT TEMPERATURE: 41°F ~ 122°F

LR35126 - WIRING DIAGRAM

1. For LED luminaires with 0-10V dimmable LED driver (*LED Driver input power <100W) Emergency Driver Dim+ (Green), Driver Dim- (Yellow) has to connect with LED Driver DIM+ and DIM-.

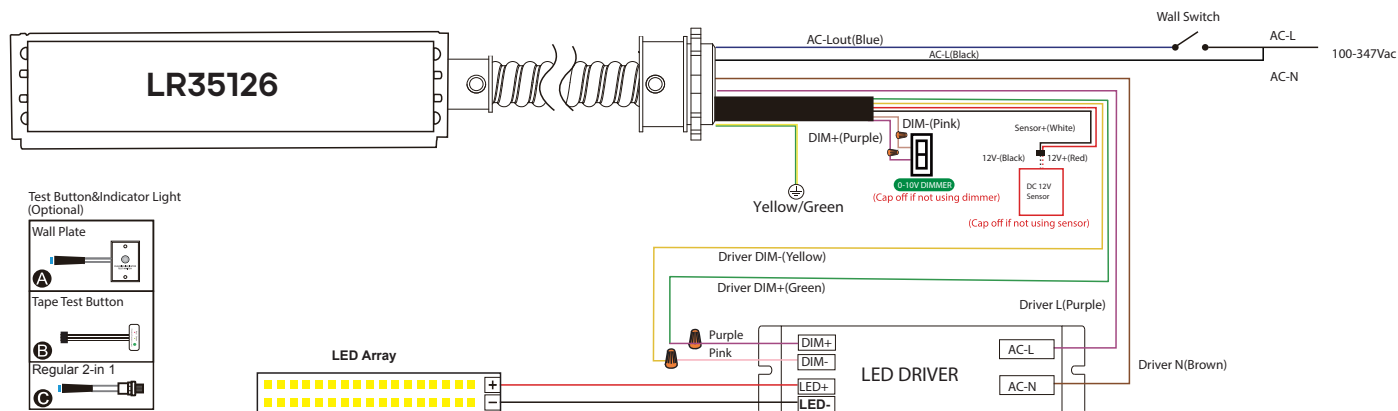

LUXSMART
BY LUXRITE

LR41704
3-PIN + RECEPTACLE
SMART SENSOR



LR41706
3-PIN + RECEPTACLE
STANDARD SENSOR




LR25189
MW Bi-LEVEL
REMOTE

MOTION SENSOR - SPECIFICATIONS

MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMING	INSTALL HEIGHT	DETECTION RANGE	DETECTION ANGLE
LR41704	LEDSNS/LHB/MW/BiLevel/SMRT/3P/RECP	<0.5W	12V	0-10V	49FT	9FT	30-150°
LR41706	LEDSNS/LHB/MW/BiLevel/3P/RECP	<0.5W	12V	0-10V	49FT	9FT	30-150°


WIRING DIAGRAM

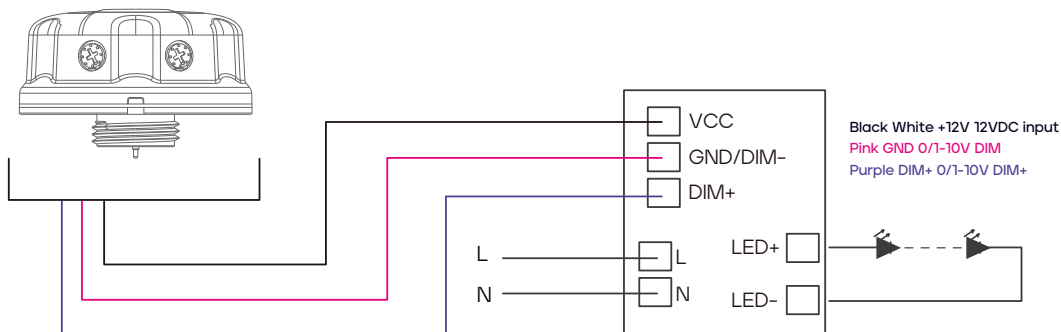


1. The sensor should be installed by qualified electrician and ensure power is OFF before installation.
2. Please read the instruction carefully before using the product and keep it well for other users to read any time.
3. We reserve the right to modify any incorrect text, image and technical parameters.
4. Any unauthorized modification is forbidden. Otherwise all guarantees will be immediately invalid.
5. Product could be optimized without prior notice.




MOTION SENSOR - LR41706-1



Standard Zhaga 18 Receptacle

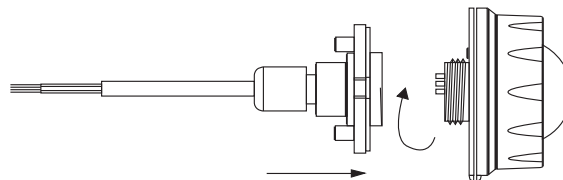

Connecting pins to the place



Rotate the sensor head tight

Wiring Diagram

