

4.5" TRIMLESS SURFACE MOUNT BRACKET LR43783

IMPORTANT


READ ALL INSTRUCTIONS BEFORE INSTALLING FIXTURES. KEEP FOR FUTURE REFERENCE.

SAFETY

FOR YOUR SAFETY, THIS FIXTURE MUST BE WIRED IN ACCORDANCE TO LOCAL ELECTRICAL CODES AND ORDINANCES. ALL WORK SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

WARNING

MAKE SURE POWER IS OFF FROM THE ELECTRICAL PANEL BEFORE STARTING INSTALLATION OR ATTEMPTING ANY MAINTENANCE. INDOOR INSTALLATION ONLY. TOOLS REQUIRED: SAW, MEASURING TAPE, ELECTRICAL WIRING (USE TAPE AND GAUGE SUITABLE FOR APPLICATION TO CONNECT THE FIXTURES).

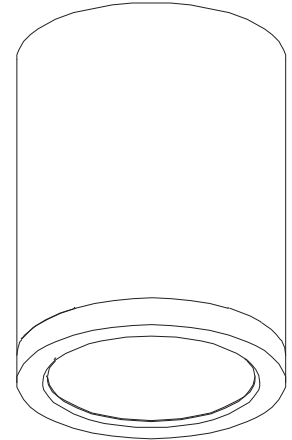

INSTRUCTIONS

1. SELECT THE DESIRED LED COLOR TEMPERATURE USING THE SWITCH INSIDE THE CYLINDER. (b)
 2. CONNECT THE QUICK CONNECTORS BETWEEN CYLINDER MODULE AND MOUNTING KIT WIRES. (c)
 3. INSTALL THE SURFACE MOUNTING PLATE ON THE CEILING RECESSED J-BOX BY SCREWING THE TWO SCREWS (d).
 4. MAKE ELECTRICAL CONNECTIONS BETWEEN THE LUMINAIRE AND J-BOX WIRES AS SHOWN IN (e) PUSH THE WIRES INTO THE JUNCTION BOX THROUGH THE CENTRAL HOLE OF THE UNIVERSAL SPIDER ADAPTER PLATE.
 5. INSTALL THE CANOPY OF LUMINAIRE ON THE CEILING (f).
- NOTE: APPLY A CIRCLE OF SEALANT AT THE CONTACT POINT BETWEEN THE LAMP BODY AND THE CEILING TO CONFIRM WATERPROOFING
6. TURN POWER BACK ON.

COMPATIBLE ACCESSORIES

