

LR25430

LED/TLMD1/5CCT/RD/WT/D2



LR25431

LED/TLMD1/5CCT/RD/WT/D2/WFL



APERTURE	1"
DISTRIBUTION	FIXED
APPLICATION	NEW CONSTRUCTION/TRIMLESS

ELECTRICAL

POWER	10W
INPUT VOLTS	120V
INPUT CURRENT	85mA
FREQUENCY	60Hz
DIMMING TYPE	TRIAC
DIMMING RANGE	10-100%
FEED WIRE GAUGE	22AWG
BREAKER SPECIFICATION *(15A @120V)	119pcs*

*Mathematically estimated value. Actual capacity may vary by breaker type and installation environment.

PHOTOMETRIC

COLOR CCT	2700K/3000K/3500K/4000K/5000K
CRI	90
LUMEN	LR25430: 850lm LR25431: 850lm
EFFICACY	LR25430: 85lm/w LR25431: 85lm/w
BEAM ANGLE	LR25430: 38° LR25431: 60°

CERTIFICATIONS & SAFETY

LR25430	ETL
LR25431	ETL
WET LOCATION	YES
IC RATED	YES
AIR TIGHT	YES
OPERATING TEMP.	-4°F to 113°F
COST/YR	\$ 1.20
WARRANTY	5 YR

MATERIAL & APPLICATION

HEAT SINK	ALUMINUM
TRIM	ALUMINUM
LENS	PC
SPACKLE FLANGE	ALUMINUM
CUTOUT	Ø2.5"
MOUNTING TYPE	PUSH AND LOCK TRIMLESS (RECESSED)
AREA OF APPLICATION	RESIDENTIAL, COMMERCIAL
CEILING TYPE	DRYWALL, WOOD

DRIVER

	POWER	INPUT VOLTS	INPUT CURRENT	FREQUENCY	INPUT POWER	OUTPUT VOLTAGE	DIMENSIONS	KNOCKOUTS
INCLUDED DRIVER	10W	120V	85mA	60Hz	10W max	36V DC	8.47"L X 1.45"W X 1.49"H	1

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	INPUT CURRENT	FREQUENCY	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35126**	LED/EMR/15W/AC/SF/E	15	100-347V	100mA	50/60Hz	12W max	170V DC	24HR	90MINS

*AMBIENT TEMPERATURE: 41°F ~ 122°F

**SOLD SEPARATELY

DIMENSIONS

CUTOUT: Ø2.5"


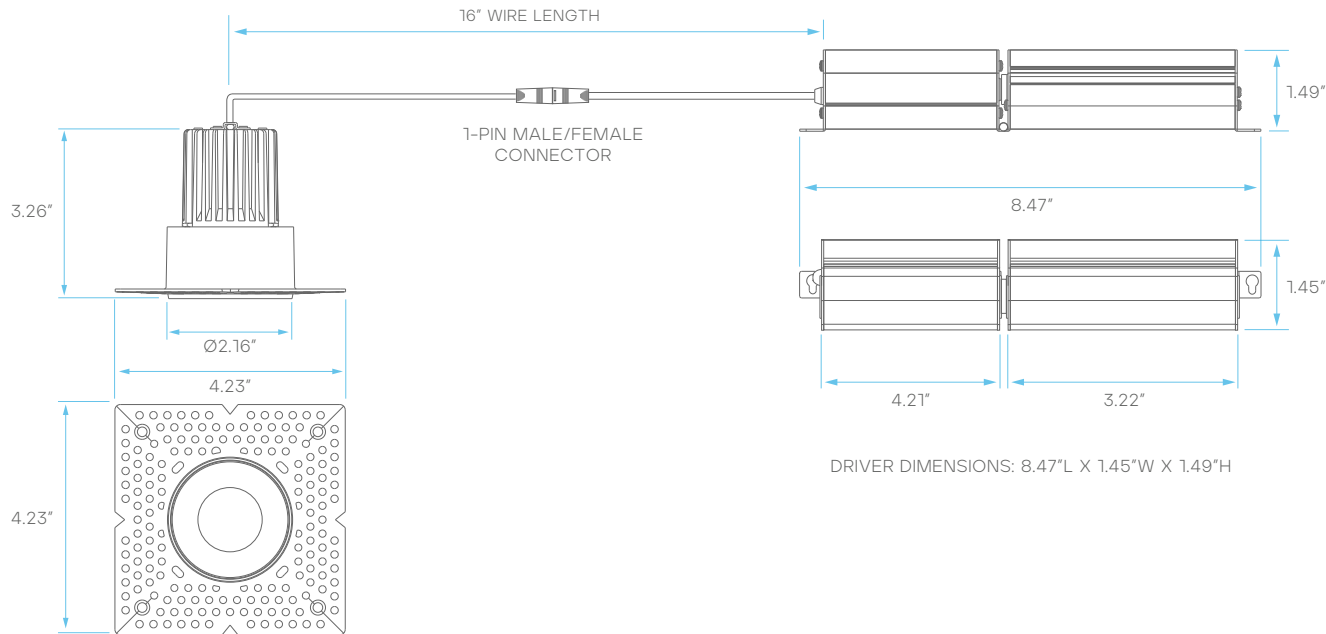



PLATE COMPATIBILITY*

*SOLD SEPARATELY

LR41004
KNOCKOUT
1



LR41010
KNOCKOUT
L1

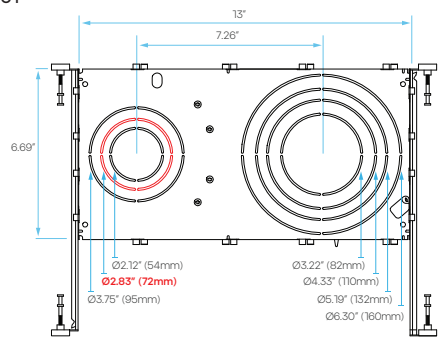

LR41011
KNOCKOUT
O

