

## GX25

### 3.5" Spot / Pendant / Surface



#### FEATURES

- 3.5" round cylinder
- 2380 lm
- 90+ CRI
- Track, canopy, surface or pendant mount
- Black or white matte finish

#### MOUNTING

- ECO track / HALO® Power Trac Track, Juno® track, and Lightolier®
- Monopoint with field cuttable stem
- Surface mount or field adjustable flexible cord pendant mounting option
- ECOH or ECOJ pendant mount option

#### ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input, 26W
- Phase dimmable
- Leading and trailing edge (Triac/ELV) dimming to 5%
- 350° rotation, 90° tilt

#### LISTING

- ETLus Listed to UL1574 (track suitable for dry locations only)
- cETL Listed to CSA C22.2 #9.0
- DLC QPL Listed

#### LED INFO

- LED: Luminus CXM-14
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: L<sub>70</sub> > 55,000 hrs

#### PROJECT INFORMATION

|               |  |      |  |
|---------------|--|------|--|
| JOB NAME      |  | TYPE |  |
| ORDERING CODE |  |      |  |

#### ORDERING CODE

|                       |                                |                                                        |                                                                          |
|-----------------------|--------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------|
| SERIES                | GX25                           |                                                        |                                                                          |
| DELIVERED LUMENS      | 25LM                           | 2380 lm                                                | Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier] |
| CCT & LM MULTIPLIER   | 27K                            | 2700K                                                  | (0.97)                                                                   |
|                       | 30K                            | 3000K                                                  | (1.00)                                                                   |
|                       | 35K                            | 3500K                                                  | (1.02)                                                                   |
| CRI                   | 90                             | 90 CRI                                                 |                                                                          |
| OPTIC & LM MULTIPLIER | 25D                            | 25 degrees                                             | (0.98)                                                                   |
|                       | 35D                            | 35 degrees                                             | (1.00)                                                                   |
|                       | 60D                            | 60 degrees                                             | (1.00)                                                                   |
| VOLTAGE               | 120                            | 120V                                                   |                                                                          |
| DIMMING               | ELV                            | leading and trailing edge (Triac/ELV) dimming to 5%    |                                                                          |
| MOUNTING OPTIONS      | P                              | pendant, 120" flexible cord                            |                                                                          |
|                       | MP                             | monopoint canopy                                       |                                                                          |
|                       | S                              | surface mount                                          |                                                                          |
|                       | LGTR <sup>1</sup>              | Lightolier spot - single circuit                       |                                                                          |
|                       | ECOH                           | ECOH/HALO spot - single circuit                        |                                                                          |
|                       | ECOJ <sup>1</sup>              | ECOJ/JUNO spot - single circuit                        |                                                                          |
|                       | ECOH <sup>P</sup>              | ECOH/HALO pendant, 120" flexible cord                  |                                                                          |
|                       | ECOJ <sup>PX</sup>             | ECOJ/JUNO pendant - single circuit, 120" flexible cord |                                                                          |
| FINISH                | BK                             | black                                                  |                                                                          |
|                       | WH                             | white                                                  |                                                                          |
| ACCESSORIES           | See the last page for details. |                                                        |                                                                          |

Follow the steps to specify your fixture, example:

**GX25 - 25LM - 30K - 90 - 35D - 120 - ELV - ECOH - BK**

#### NOTES

1. Adaptor designed with adjustable conductor for 2 circuit (J and L Type) tracks.

## PROJECT INFORMATION


|               |  |      |  |
|---------------|--|------|--|
| JOB NAME      |  | TYPE |  |
| ORDERING CODE |  |      |  |

## PHOTOMETRIC DATA

### 25LM CCT MULTIPLIERS

|                                           |       |
|-------------------------------------------|-------|
|                                           | 90CRI |
| 2700K                                     | 0.97  |
| 3000K                                     | 1.00  |
| 3500K                                     | 1.02  |
| FC Formula = CBCP / Distance <sup>2</sup> |       |

### 25D 26.5° NO ACCESSORY




WATTS: 25.6 LPW: 93.8

LUMENS: 2402 CCT: 3000K

#### INTENSITY

| DEGREE | CANDELA |
|--------|---------|
| 0      | 8262    |
| 5      | 7176    |
| 15     | 3407    |
| 25     | 748     |
| 35     | 277     |
| 45     | 148     |

### 35D 35.0° NO ACCESSORY




WATTS: 25.6 LPW: 96.1

LUMENS: 2459 CCT: 3000K

#### INTENSITY

| DEGREE | CANDELA |
|--------|---------|
| 0      | 5513    |
| 5      | 5178    |
| 15     | 3323    |
| 25     | 1291    |
| 35     | 361     |
| 45     | 138     |

### 60D 58.2° NO ACCESSORY



WATTS: 25.6 LPW: 95.7

LUMENS: 2449 CCT: 3000K


#### INTENSITY

| DEGREE | CANDELA |
|--------|---------|
| 0      | 2304    |
| 5      | 2254    |
| 15     | 1941    |
| 25     | 1410    |
| 35     | 802     |
| 45     | 392     |

### 25LM CCT MULTIPLIERS

|                                           |       |
|-------------------------------------------|-------|
|                                           | 90CRI |
| 2700K                                     | 0.97  |
| 3000K                                     | 1.00  |
| 3500K                                     | 1.02  |
| FC Formula = CBCP / Distance <sup>2</sup> |       |

### 25D 26.5° SNOOT-BK




WATTS: 25.6 LPW: 82.1

LUMENS: 2103 CCT: 3000K

#### INTENSITY

| DEGREE | CANDELA |
|--------|---------|
| 0      | 8114    |
| 5      | 7088    |
| 15     | 3391    |
| 25     | 719     |
| 35     | 212     |
| 45     | 53      |

### 35D 34.9° SNOOT-BK




WATTS: 25.6 LPW: 82.5

LUMENS: 2113 CCT: 3000K

#### INTENSITY

| DEGREE | CANDELA |
|--------|---------|
| 0      | 5496    |
| 5      | 5167    |
| 15     | 3309    |
| 25     | 1197    |
| 35     | 207     |
| 45     | 41      |

### 60D 54.6° SNOOT-BK



WATTS: 25.6 LPW: 68.5


LUMENS: 1754 CCT: 3000K

#### INTENSITY


| DEGREE | CANDELA |
|--------|---------|
| 0      | 2296    |
| 5      | 2247    |
| 15     | 1933    |
| 25     | 1350    |
| 35     | 502     |
| 45     | 81      |

|               |  |      |  |
|---------------|--|------|--|
| JOB NAME      |  | TYPE |  |
| ORDERING CODE |  |      |  |


## MOUNTING OPTIONS

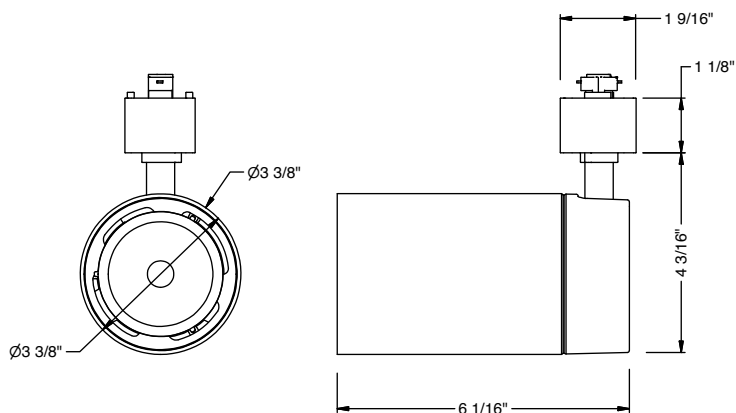


ECOH / ECOJ / LGTR

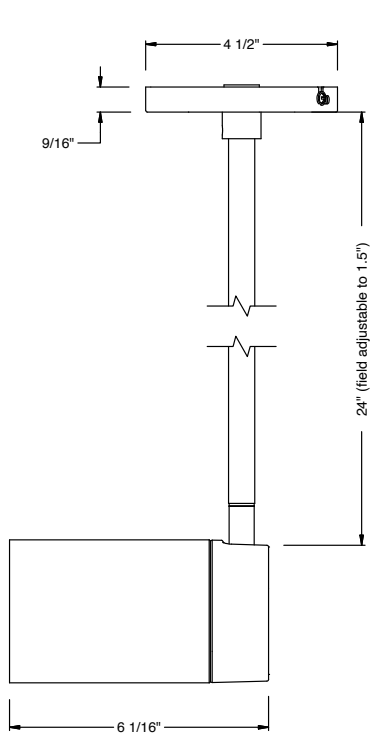


MONOPOINT

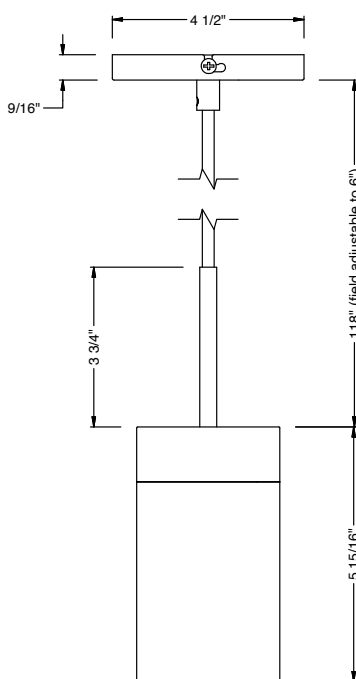


PENDANT

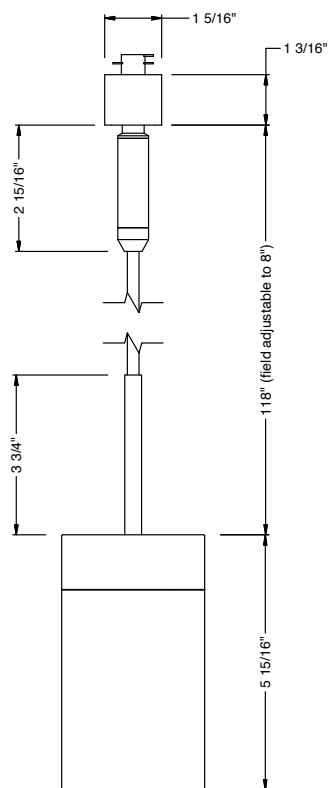

ECOHP / ECOJP

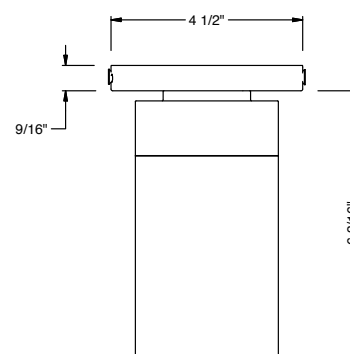

SURFACE MOUNT



| PROJECT INFORMATION |  |      |  |
|---------------------|--|------|--|
| JOB NAME            |  | TYPE |  |
| ORDERING CODE       |  |      |  |

## ACCESSORIES

Follow the steps to specify your fixture, example:

**GX25 - 25LM - 30K - 90 - 35D - 120 - ELV - ECOH - BK - SNOOTBK**

### Accessories

**GX25-SNOOT-BK**

snoot, black

**GX25-SNOOT-WH**

snoot, white

**GX25-HCL-BK**

honeycomb louver, black

**GX25-HCL-WH**

honeycomb louver, white

**ECOH-MP-CANOPY-BK**

ECOH square canopy, black

**ECOH-MP-CANOPY-WH**

ECOH square canopy, white


**ECOJ-MP-CANOPY-BK**

ECOJ round canopy, black




**ECOJ-MP-CANOPY-WH**

ECOJ round canopy, white

- NOTE:** 1. Omit GX25 from code when requesting accessory with fixture  
2. Fixture will only accept one accessory at a time

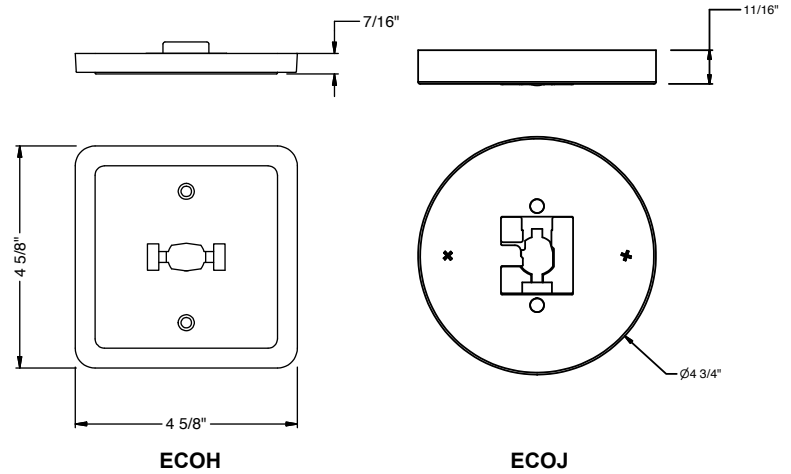

### SNOOT



### HONEYCOMB LOUVER

