

# alphabet

## NU6

### 6" Round Downlight Standard White




AT  
airtight

DF  
dead-front

PR  
plenum rated

wet rated

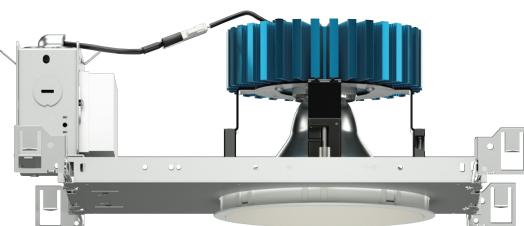

Trim

#### FEATURES

- Thermally optimized for longevity
- 1-1/8" bezel regress with 1/16" micro flange
- 10° to 70° optical beam control
- UGR <12
- Multiple mounting, glare controls options, trim and finishes available

#### LED

- 90 CRI: SDCM = 2-step MacAdam Ellipse, Lumen Maintenance:  $L_{70}$  > 66,000 hrs
- 80 CRI: SDCM = 2-step MacAdam Ellipse, Lumen Maintenance:  $L_{70}$  > 66,000 hrs

#### DIMMING AND CONTROLS


- eldoLED flicker free 0-10V dimming to 0% and 1%
- eldoLED flicker free DALI dimming to 0% and 1%
- DMX dim to zero
- Lutron Hi-lumen 2-Wire (Triac and Eco System) dimming to 0.1% and 1%
- Leading & trailing edge (Triac/ELV) dimming to 1%
- Casambi bluetooth dimming to 0.1%
- NLight control interface dimming to 0%

#### LISTING


- ULus Listed to UL1598 & UL2108; cUL Listed to CSA C22.2 #250.0
- IP65 with lens - Suitable for wet locations with lens - Suitable for damp locations without lens
- Non-conductive, dead-front construction (shower approved)
- Made in the USA - meets the requirements of the Buy American provision within the ARRA
- NSF/ANSI-2 with lens (Non-Food and Splash Zones)
- 5 Year Limited warranty

#### Fixture Height


##### 10LM-30LM LOW LUMEN

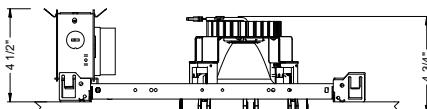

##### 40LM-50LM HIGH LUMEN

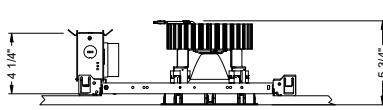


#### TRIMMED (STANDARD)





ceiling cutout  
6 3/8" diameter  
ceiling thickness  
1/8" to 2"

#### TRIMMED (NARROW BEAM 10°)



ceiling cutout  
6 3/8" diameter  
ceiling thickness  
1/8" to 2"



#### PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

#### 30° - 70° BEAM

(Note: Specifications are subject to change without notice)

#### 29mm COB PERFORMANCE DATA

LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	880LM @30K/80CRI	9W
15LM	1200LM @30K/80CRI	14W
20LM	1660LM @30K/80CRI	17W
25LM	2000LM @30K/80CRI	20W
30LM	2540LM @30K/80CRI	26W
40LM	3180LM @30K/80CRI	32W
50LM	4225LM @30K/80CRI	43W
10LM	740LM @30K/90CRI	9W
15LM	1014LM @30K/90CRI	14W
20LM	1402LM @30K/90CRI	17W
25LM	1690LM @30K/90CRI	20W
30LM	2146LM @30K/90CRI	26W
40LM	2687LM @30K/90CRI	32W
50LM	3570LM @30K/90CRI	43W
Notes	Delivered lumens based on HE60 optic, (see page 2)	

#### 10° BEAM

(Note: Specifications are subject to change without notice)

#### 9mm COB PERFORMANCE DATA

LED LIGHT ENGINE	NOMINAL DELIVERED LUMENS	SYSTEM WATTAGE
10LM	855LM @30K/80CRI	11W
15LM	1265LM @30K/80CRI	15W
20LM	1600LM @30K/80CRI	22W
25LM	1985LM @30K/80CRI	27W
30LM	2490LM @30K/80CRI	35W
35LM	2840LM @30K/80CRI	43W
40LM	3290LM @30K/80CRI	54W
10LM	722LM @30K/90CRI	11W
15LM	1070LM @30K/90CRI	15W
20LM	1350LM @30K/90CRI	22W
25LM	1677LM @30K/90CRI	27W
30LM	2105LM @30K/90CRI	35W
35LM	2400LM @30K/90CRI	43W
40LM	2780LM @30K/90CRI	54W
Notes	Delivered lumens based on S10 optic, (see page 2)	

eldoLED

your product. our drive.



LUTRON  
SMART  
LIGHTING  
DISCOVER

CASAMBI

#### CONSTRUCTION

- Shatter proof acrylic bezel lens
- Lexan™ (PC) Optimal connectivity for wireless control signal.
- Impact and chemical resistant at the highest level.
- Withstands temperatures up to 240°F.
- Electrocoated 16-gauge cold-rolled steel construction
- Accommodates ceiling thickness from 1/8" to 2"

#### ELECTRICAL

- 120V-277V, 120 only Triac / ELV
- Power factory ≥ 0.9
- 2kV driver input surge protection
- Remote and Integral (ITS) emergency test switch
- 7W, 10W (T20 CEC) and 12W EM 90min battery
- Max. ambient installation temperature 95°F (35°C)

# alphabet

## 30°- 70° BEAM ORDERING CODE

<b>SERIES</b>	NU6	NU6					
<b>TYPE</b>	RD	round downlight					
<b>LED</b>	SW	standard white					
<b>DELIVERED LUMENS</b>	10LM	880 lm					
	15LM	1200 lm					
	20LM	1660 lm					
	25LM	2000 lm					
	30LM	2500 lm					
	40LM	3180 lm					
	50LM	4225 lm					
	Standard Configuration: 3000K 80CRI HE60						
Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier] x [Reflector Multiplier]							
<b>CCT</b>	27K	2700K	CCT	2700K	3000K	3500K	4000K
	30K	3000K	CRI	80+	90+	80+	90+
	35K	3500K	CCT MULTIPLIER FOR LUMEN OUTPUT	0.96	0.81	1.00	0.85
	40K	4000K				1.03	0.88
<b>CRI</b>	80	80 CRI				1.06	0.91
	90	90 CRI					
<b>OPTIC &amp; LM MULTIPLIER</b> SEE PAGE 4	HE40	40° high efficiency diffused lens				(0.99)	
	HE60	60° high efficiency diffused lens				(1.00)	
	HE70	70° high efficiency diffused lens				(0.96)	
	SS30	30° semi-specular with clear lens				(0.89)	
	SS40	40° semi-specular with clear lens				(0.90)	
	SS60	60° semi-specular with clear lens				(0.92)	
	D40	40° diffused with clear lens				(0.86)	
	D60	60° diffused with clear lens				(0.90)	
10° narrow beam angle, see page 3 for details.			WH70	70° brilliant white with clear lens		(0.99)	
<b>ACCESSORY</b> SEE PAGE 4	HCL <sup>1</sup>	honeycomb louver					
	Attached to bezel						
<b>BEZEL LENS</b> SEE PAGE 4	NL <sup>2,3</sup>	no lens				(1.06)	
<b>TRIM COLOR</b> SEE PAGE 4	BK	black					
	WH	white					
	MC	matte chrome					
	BZ	bronze					
	WT	wheat					
<b>BEZEL COLOR</b> SEE PAGE 4	BK	black				(0.98)	
	WH	white				(1.00)	
	MC	matte chrome				(0.99)	
	BZ	bronze				(0.98)	
	WT	wheat				(0.99)	

## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## 30°- 70° BEAM ORDERING CODE

<b>MOUNTING OPTIONS</b> SEE PAGE 7, 8	NC	new construction with ceiling fitting plate
	IC <sup>4</sup>	insulation contact housing
	ICAT <sup>4</sup>	insulation contact/airtight housing
	CP <sup>4</sup>	chicago plenum housing
	RET	retrofit, no ceiling fitting plate
<b>VOLTAGE</b>	120	120V
	UNV	120V-277V
<b>DIMMING</b>	DIM10	eldoLED flicker free 0-10V dimming to 1%
	DIM10Z	eldoLED flicker free 0-10V dimming to 0%
	DALI	eldoLED flicker free DALI dimming to 1%
	DALIZ	eldoLED flicker free DALI dimming to 0%
	DMXZ	DMX dim to zero
	LTE <sup>5,6</sup>	Lutron Hi-lume 2-Wire (Triac) dimming to 1%
	LUT <sup>7</sup>	Lutron Hi-lume Ecosystem dimming to 1%, Soft-on & Fade-to-Black
	LUTP <sup>8</sup>	Lutron Hi-lume Premier Ecosystem dimming to 0.1%, Soft-on & Fade-to-Black
	ELV1 <sup>5,6</sup>	leading & trailing edge (Triac/ELV) dimming to 1%
	CAS	Casambi Bluetooth control with flicker free 1% dimming
	NLT	nLight control interface: standard Cat-5/RJ45 connection (female), dimming to 0%
<b>ELECTRICAL OPTIONS</b>	EM7 <sup>9</sup>	emergency battery backup, 90 minutes at 7W to LED
	EM12 <sup>9,10</sup>	emergency battery backup, 90 minutes at 12W to LED
	EM10CA20 <sup>9</sup>	remote emergency battery backup, 90 minutes at 10W to LED, CA title 20

## ADDITIONAL MOUNTING INFO

New Construction Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	Extends a pair of Bar Hangers Total Mounting Length: 29" to 48"

## YOUR COMPLETED ORDERING CODE

Follow the steps to specify your fixture, example:

**NU6 - RD - SW - 13LM - 30K - 80 - HE40 - WH - WH - NC - UNV - DIM10 - EM7**

## NOTES

1. HCL not available with lens. Multiplier: Delivered Lumens (0.78) / Beam Spread (0.80).
2. NL option available for SS30/SS40/SS60/D40/D60/WH70.
3. NL option does not meet requirement for AT/DF/WET/NSF listings.
4. IC/ICAT/CP not available in 50LM.
5. ELV1/LTE available in 120V.
6. ELV1/LTE not available in 10LM/50LM.
7. LUT not available in 50LM.
8. LUTP not available in 25LM/30LM/40LM/50LM.
9. For integrated test switch add "ITS" after emergency backup code, i.e. EM12ITS. Test switch is mounted in the bezel of the fixture.
10. EM12 not available in 10LM.

\*EldoLED uses logarithmic dimming curve as standard. For linear dimming curve, add "LIN" after dimming code, i.e. DIM10LIN.

# alphabet

## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## 10°NARROW BEAM - ORDERING CODE

SERIES	NU6	NU6													
TYPE	RD	round downlight													
LED	SW	standard white													
DELIVERED LUMENS	10LM	855 lm													
	15LM	1265 lm													
	20LM	1600 lm													
	25LM	1985 lm													
	30LM	2490 lm													
	35LM	2840 lm													
	40LM	3290 lm													
Standard Configuration: 3000K 80CRI															
Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier]															
CCT	27K	2700K	CCT	2700K	3000K	3500K	4000K								
	30K	3000K	CRI	80+	90+	80+	90+								
	35K	3500K	CCT MULTIPLIER FOR LUMEN OUTPUT	0.96	0.81	1.00	0.84	1.01	0.85						
	40K	4000K						1.03	0.87						
CRI	80	80 CRI													
	90	90 CRI													
OPTIC & LM MULTIPLIER SEE PAGE 4	S10	10° specular with clear lens													
	HCL <sup>1</sup>	honeycomb louver													
ACCESSORY SEE PAGE 4	Attached to bezel														
	NL <sup>2</sup>	no lens	(1.06)												
TRIM COLOR SEE PAGE 4	BK	black													
	WH	white													
	MC	matte chrome													
	BZ	bronze													
	WT	wheat													
BEZEL COLOR SEE PAGE 4	BK	black	(0.98)												
	WH	white	(1.00)												
	MC	matte chrome	(0.99)												
	BZ	bronze	(0.98)												
	WT	wheat	(0.99)												

## 10°NARROW BEAM - ORDERING CODE

MOUNTING OPTIONS SEE PAGE 7, 8	NC	new construction with ceiling fitting plate
	IC <sup>3</sup>	insulation contact housing
	ICAT <sup>3</sup>	insulation contact/airtight housing
	CP <sup>3</sup>	chicago plenum housing
	RET	retrofit, no ceiling fitting plate
	120	120V
	UNV	120V-277V
DIMMING	DIM10	eldoLED flicker free 0-10V dimming to 1%
	DIM10Z	eldoLED flicker free 0-10V dimming to 0%
	DALI	eldoLED flicker free DALI dimming to 1%
	DALIZ	eldoLED flicker free DALI dimming to 0%
	DMXZ	DMX dim to zero
	LTE <sup>4,5</sup>	Lutron Hi-lume 2-Wire (Triac) dimming to 1%
	LUT <sup>6</sup>	Lutron Hi-lume Ecosystem dimming to 1%, Soft-on & Fade-to-Black
	LUTP <sup>7</sup>	Lutron Hi-lume Premier Ecosystem dimming to 0.1%, Soft-on & Fade-to-Black
	ELV1 <sup>4,5</sup>	leading & trailing edge (Triac/ELV) dimming to 1%
	CAS	Casambi Bluetooth control with flicker free 1% dimming
NLT	nLight control interface: standard Cat-5/RJ45 connection (female), dimming to 0%	
ELECTRICAL OPTIONS	EM7 <sup>8</sup>	emergency battery backup, 90 minutes at 7W to LED
	EM12 <sup>8</sup>	emergency battery backup, 90 minutes at 12W to LED
	EM10CA20 <sup>8</sup>	remote emergency battery backup, 90 minutes at 10W to LED, CA title 20

## ADDITIONAL MOUNTING INFO

New Construction Bar Hangers (included)	Mounting Length: 14-3/4" to 26"
Extension Kit p/n: K20266 (ordered separately, 1 per fixture)	Extends a pair of Bar Hangers Total Mounting Length: 29" to 48"

## YOUR COMPLETED ORDERING CODE

Follow the steps to specify your fixture, example:

**NU6 - RD - SW - 30LM - 35K - 80 - S10 - WH - WH - NC - UNV - DIM10**

## NOTES

1. HCL not available with lens. Multiplier: Delivered Lumens (0.78) / Beam Spread (0.80).
2. NL option does not meet requirement for AT/DF/WET/NSF listings.
3. IC/ICAT/CP not available in 40LM.
4. ELV1/LTE available in 120V.
5. ELV1/LTE not available in 10LM/40LM.
6. LUT not available in 40LM.
7. LUTP not available in 25LM/30LM/40LM.
8. For integrated test switch add "ITS" after emergency backup code, i.e. EM12ITS. Test switch is mounted in the bezel of the fixture.

\*EldoLED uses logarithmic dimming curve as standard. For linear dimming curve, add "LIN" after dimming code, i.e. DIM10LIN

# alphabet

## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## TRIM OPTIONS

### TRIM/BEZEL COLORS



WH



MC



BK



BZ



WT

## OPTICAL OPTIONS

- UGR calculation based on CIE 117-1995; room size: 4H X 8H, reflectance: 70/50/20;
- UGR calculation based on 15LM fixtures, unless otherwise noted.



**CL**  
Clear Lens

OPTIC	BEAM ANGLE	UGR
S10	9.2	11.9
SS30	30.5	11.3
SS40	39.1	14.1
SS60	53.3	14.2
D40	39.3	11.5
D60	57.8	14.9
WH70	71.4	18.2



**HE**  
High Efficiency Diffused Lens

OPTIC	BEAM ANGLE	UGR
HE40	40.4	15.4
HE60	55.8	17.8
HE70	74.1	20.4



**ACCESSORY**  
Honeycomb Louver

OPTIC	BEAM ANGLE	UGR
S10	7.4	5
SS30	24.4	5
SS40	31.3	5
SS60	42.6	5
D40	31.4	5
D60	46.2	5
WH70	57.1	5


## GLARE CONTROL

### CUT-OFF ANGLE

Visual comfort is achieved with a lower cut-off angle due to improved glare control. The smaller the cut-off angle, the easier it is on the eye.

Alphabet downlights have been thoughtfully engineered to eliminate glare while still delivering functional illumination.

- Cutoff angle is 36.5° degrees;

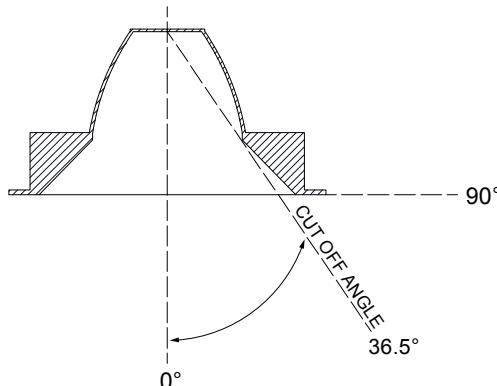

# alphabet


## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## PHOTOMETRIC DATA

25LM CCT MULTIPLIERS		
	80 CRI	90CRI
2700K	0.96	0.81
3000K	1	0.84
3500K	1.01	0.85
4000K	1.03	0.87

FC Formula = CBCP / Distance<sup>2</sup>

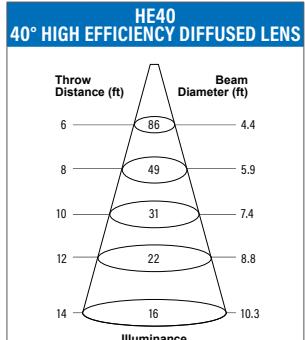


WATTS: 20 LPW: 98.9

LUMENS: 1977 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	3107
5	2972
15	2098
25	1125
35	534
45	228

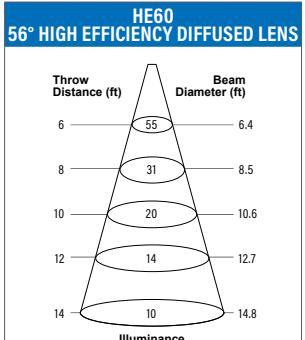


WATTS: 20 LPW: 99.2

LUMENS: 1985 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	1991
5	1944
15	1623
25	1139
35	679
45	334

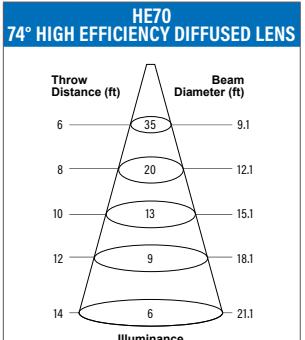


WATTS: 20 LPW: 93.7

LUMENS: 1874 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	1251
5	1237
15	1128
25	929
35	678
45	423

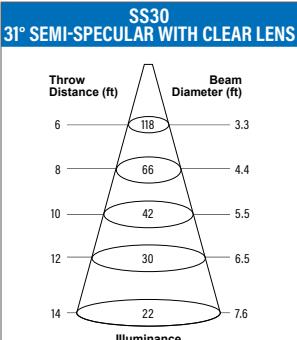

WATTS: 20 LPW: 87


LUMENS: 1740 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	4245
5	3919
15	2166
25	1079
35	342
45	38

50LM CCT MULTIPLIERS		
	80 CRI	90CRI
2700K	0.96	0.81
3000K	1	0.84
3500K	1.01	0.85
4000K	1.03	0.87

FC Formula = CBCP / Distance<sup>2</sup>

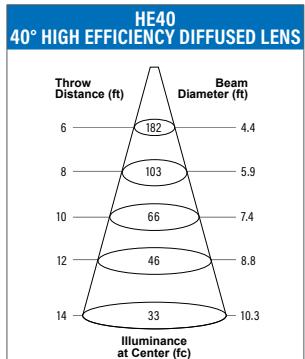


WATTS: 43 LPW: 97.1

LUMENS: 4177 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	6563
5	6278
15	4432
25	2376
35	1127.5
45	482

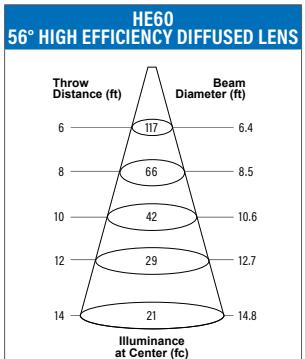


WATTS: 43 LPW: 97.5

LUMENS: 4193 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	4205
5	4106
15	3428
25	2407
35	1434
45	706

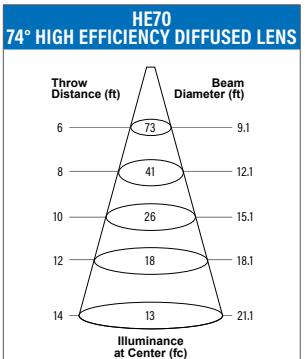


WATTS: 43 LPW: 92.1

LUMENS: 3959 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	2642
5	2612
15	2383
25	1962
35	1433
45	893

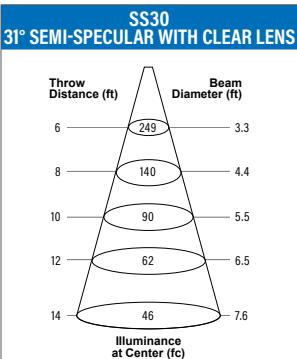

WATTS: 43 LPW: 85.5

LUMENS: 3676 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	8969
5	8278
15	4576
25	2280
35	722
45	79

# alphabet

## PHOTOMETRIC DATA (CONTINUED)

### PROJECT INFORMATION


JOB NAME		TYPE
ORDERING CODE		

### 20LM CCT MULTIPLIERS

	80 CRI	90CRI
2700K	0.96	0.81
3000K	1	0.84
3500K	1.01	0.85
4000K	1.03	0.87

FC Formula = CBCP / Distance<sup>2</sup>

### S10 10° SPECULAR WITH CLEAR LENS

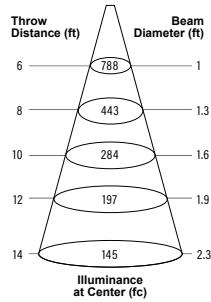

WATTS: 16.3 LPW: 99.7  
LUMENS: 1624 CCT: 3000K

### INTENSITY


DEGREE	CANDELA
0	28369
5	12666
15	720
25	587
35	453
45	10

### 40LM CCT MULTIPLIERS

	80 CRI	90CRI
2700K	0.96	0.81
3000K	1	0.84
3500K	1.01	0.85
4000K	1.03	0.87

FC Formula = CBCP / Distance<sup>2</sup>

### S10 10° SPECULAR WITH CLEAR LENS

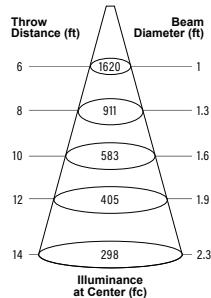

WATTS: 40.8 LPW: 81.9  
LUMENS: 3340 CCT: 3000K

### INTENSITY

DEGREE	CANDELA
0	58334
5	26045
15	1481
25	1207
35	932
45	20

# alphabet


## PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

## MOUNTING OPTIONS


### Fixture Height

#### 10LM-30LM Low Lumen

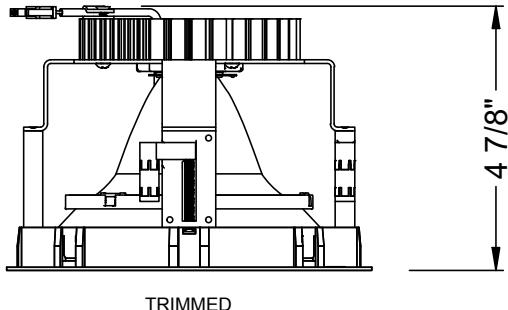

TRIMMED


#### 40LM-50LM High Lumen

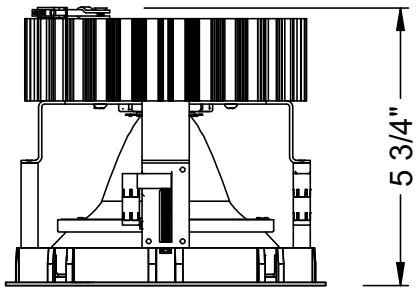


TRIMMED

### NC - New Construction


#### TRIM

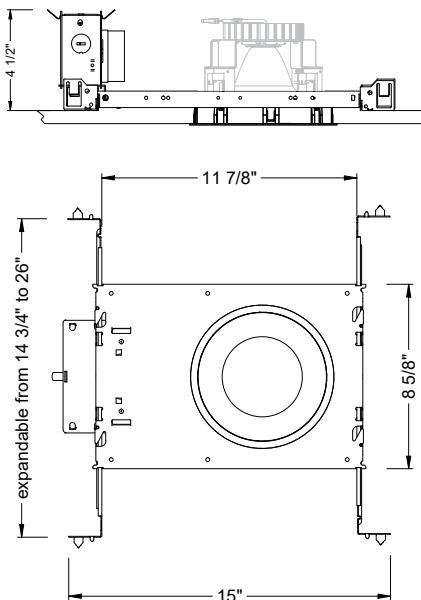


#### TRIMMED (STANDARD)




ceiling cutout  
6 3/8" diameter  
ceiling thickness  
1/8" to 2"



#### TRIMMED (NARROW BEAM 10°)




ceiling cutout  
6 3/8" diameter  
ceiling thickness  
1/8" to 2"



# alphabet

## MOUNTING OPTIONS (CONTINUED)

### RET - RETRO TRIM/TRIMLESS

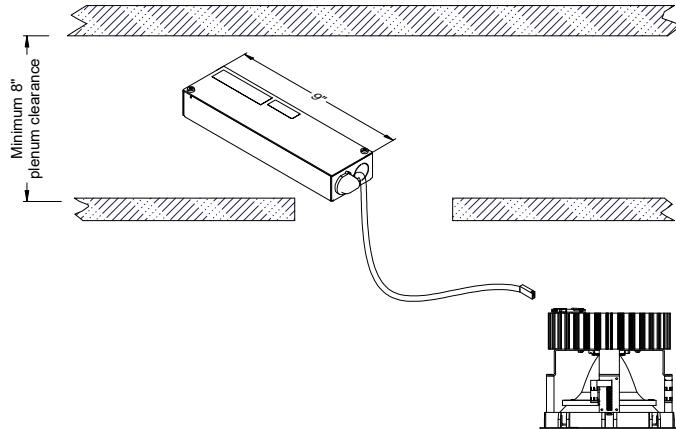


RATINGS / CERTIFICATIONS	NC	RET	IC	ICAT	CP
TYPE NON-IC	✓	✓			
TYPE IC			✓	✓	✓
CHICAGO PLENUM (CCEA)					✓
SUITABLE FOR AIR HANDLING PLENUMS	✓	✓	✓	✓	✓
REDUCED AIRFLOW (WITH LENS) ASTM E283	✓	✓	✓	✓	✓

FIXTURE TYPE	CEILING THICKNESS	
	MOUNTING TYPE	
	NC, IC, ICAT, CP, RET	STANDARD CEILING THICKNESS
TRIM	1/8" to 2"	

### PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

### IC - INSULATION CONTACT HOUSING ICAT - INSULATION CONTACT / AIR TIGHT CP - CHICAGO PLENUM

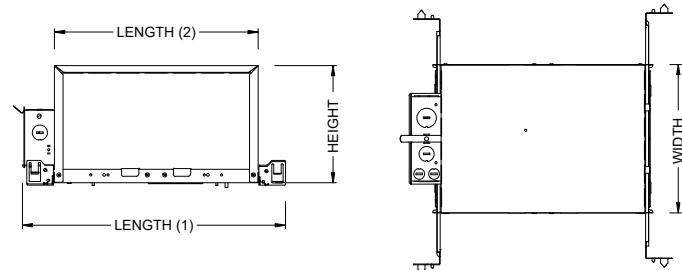

BOX SIZE	L1	L2	W	H
A	18 - 1/4"	14 - 7/8"	12 - 1/8"	8 - 1/2"

LUMEN OUTPUT	BOX - A		
	CP	IC	ICAT
	✓	✓	✓
10LM	✓	✓	✓
15LM	✓	✓	✓
20LM	✓	✓	✓
25LM	✓	✓	✓
30LM	✓	✓	✓
35LM	✓	✓	✓
40LM			

LUMEN OUTPUT	BOX - A		
	CP	IC	ICAT
	✓	✓	✓
10LM	✓	✓	✓
15LM	✓	✓	✓
20LM	✓	✓	✓
25LM	✓	✓	✓
30LM	✓	✓	✓
35LM	✓	✓	✓
40LM	✓	✓	✓
50LM			

# alphabet

## BATTERY OPTIONS

### EMERGENCY BATTERY

IOTA's ILB Battery Backups are UL Listed LED emergency drivers that allow the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the ILB switches to the emergency mode and operates the existing fixture for 90 minutes. The unit contains a battery, charger, and converter circuit in a single can. The Constant Power design of the ILB maintains the output wattage to the LED array even as the system voltage diminishes. UL 924 Listed for U.S. and Canada. UL 1310 Certified, Output Class 2 Compliant. Includes single-piece TBTS test switch and charge indicator accessory kit. For use with switched and unswitched fixtures, and includes Two-wire universal AC input. Meets or exceeds all National Electric Code and Life Safety Code Emergency Lighting Requirements. Rated for use in Plenum, Damp Location, Recessed Type IC, and Enclosed and Gasketed Luminaires.

### REMOTE TEST SWITCH


The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

### EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED Fixture Sizes of 4" and Larger are capable of below ceiling access. IC/ICAT/CP Box and ITS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery.


### REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/Building Codes.

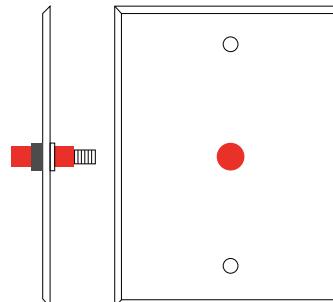


Remote Test Switch


### NC - NEW CONSTRUCTION WITH EM BATTERY (REMOTE TEST SWITCH)

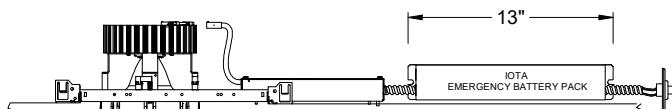

### IC / ICAT / CP - INSULATION CONTACT HOUSING WITH EM BATTERY (REMOTE TEST SWITCH)

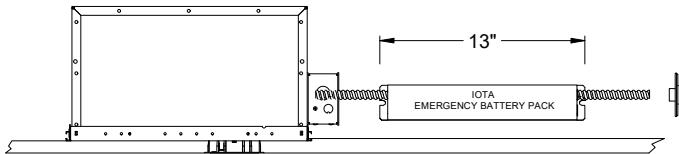

### RET - RETROFIT WITH EM BATTERY (REMOTE TEST SWITCH)

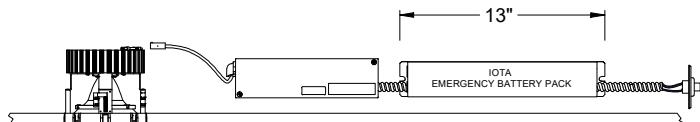


### PROJECT INFORMATION

JOB NAME		TYPE	
ORDERING CODE			

EM MODE OUTPUT (DELIVERED LUMENS)			
LUMEN ORDERING CODE	EM7	EM10	EM12
ALL OPTIONS (30LM TO 1000LM)	1167LM	1571LM	1885LM

Notes: Based on 30K, 80CRI

### Accessory 76066 Optional T-Grid Mounting Kit<sup>1</sup>

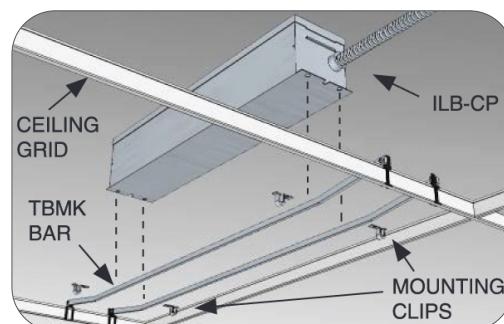

1. Can be used with any of the Emergency Battery Backups. Must be ordered as a separate line item.