

LEDVANCE Luminaires

EMERGENCY MINI WALL PACK

PERFORMANCE CLASS

Application

The EMERGENCY MINI WALL PACK luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 67% in energy savings. Ideal in place of traditional luminaires, or as new installations, the EMERGENCY MINI WALL PACK is offered with 3 selectable color temperatures and emergency back-up for illuminating building exteriors, outdoor corridors, walkways, and stairwells where egress lighting is required.

Benefits and Features

- CCT Selectable (3000K, 4000K, or 5000K) enabled through switch located inside fixture
- IP65 rated body with aluminum backplate and polycarbonate lens offers easy mounting, reducing installation and maintenance costs
- High color rendering and DLC Premium listing ensure energy efficiency and provide uniform and even lighting
- Photosensor included provides additional energy savings
- Emergency Battery Back-up for egress lighting
- Up to 125 LPW
- CRI >80
- Offered in 15 watts
- Non-cutoff distribution
- Energy savings up to 67%

Electrical

- 120-277V_{AC}
- Power Factor >0.9
- THD <20%
- 0-10V dimmable

Rated Life

- 50,000 hours (L₇₀)

Warranty

- 5-year
- NLB Trusted Warranty Program

Operating Temperature

- -40°F to +122°F (-40°C to +50°C) when not in emergency mode
- +32°F to +122°F (0°C to +50°C) when in emergency mode



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
23W CFL	23	15	35%
35W HPS	45	15	67%
42W CFL	46	15	67%

Certifications and Listings

- cULus
- IP65
- RoHS
- DLC Premium
- FCC

Installation

Luminaire mounts to recessed outlet box or can be surface mounted.



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide


EMWALPAK	1A	/	015	UNV	D	8	SC2	/	NC	/	BZ	/	P
Product Name	Generation		Wattage	Voltage	Dimming	CRI	Color Temp		Distribution		Color/Finish		P = Photocell
EMWALPAK =	1A = Generation 1A		015 = 15 Watts	120-277V	D = 0-10V	8 = >80	SC2 = 3000, 4000 or 5000K		NC = Non cutoff		BZ = Bronze Finish		
Emergency Mini													
Wall Pack													

Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp.	Distribution	Total Fixture Lumens	LPW	DLC
61369	EMWALPAK1A/015UNVD8SC2NC/BZ/P	15	120-277	0-10V	>80	3000, 4000 or 5000K	Non-cutoff	1875	125	Premium

Physical Information

Luminaire Description	(A) Length in (mm)	(B) Width in (mm)	(C) Height in (mm)
EMWALPAK1A	8.23 (209)	5.04 (128)	2.75 (70)

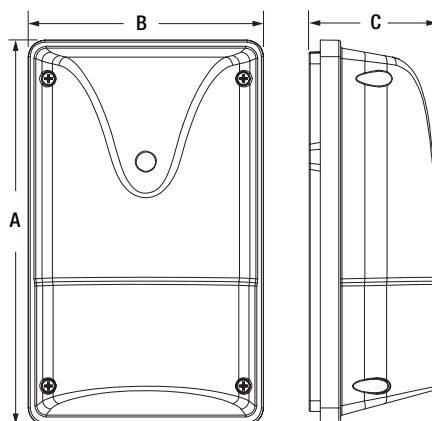

Options Information

Emergency Battery Back-up: Activates when normal power supply to the fixture fails, providing a minimum of 600 lumens for at least 90 minutes.

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.

[/sylvania](https://twitter.com/sylvania) [/sylvania](https://facebook.com/sylvania)

