

ECV60-12DC

Class 2 Electronic EV

Outdoor Aluminum With Wire Compartment Enclosure


Single Circuit: **12VDC**

Total Wattage: **60W max**

Input Voltage: **120V 50/60Hz**



Conforms to UL STD. 1310
Certified to CSA
STD. C22.2 № 223

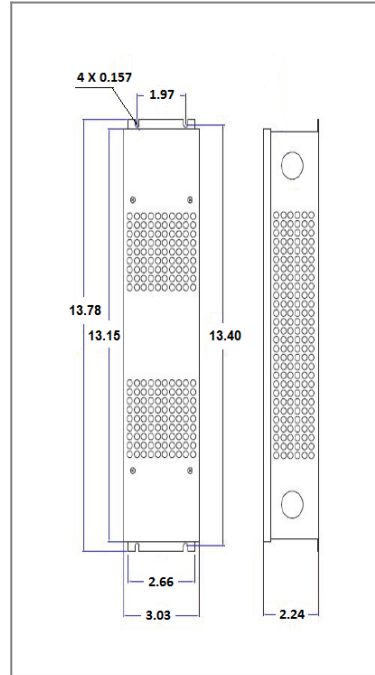

Transformer


Dimmable with any ELV, MLV, CL, forward or reverse phase.
Input leads are 18AWG 600V
Output leads are 18AWG 300V
Leads max. operational temperature is 105°C

Housing

The actual transformer 60W is encapsulated in the enclosure
The enclosure is Aluminum with wire compartment, IP 67 rated
Wiring compartment has 4 knockouts sizes for 3/8 inch screw cable connectors
Enclosure Temperature does not exceed 70°C at 45°C ambient and fully loaded
Dimensions (inch): H = 13.15, W = 3.03, D = 2.24
Weight (LBs): 0.35

Electrical Parameters

Input Voltage:	120V 50/60Hz
Max. input current at full load:	0.76A
Output voltage without load:	12.1VDC
Output voltage fully loaded:	12VDC
Max. Total Wattage:	60W
Max. Output Current:	5A
Efficiency:	85%
Load regulation:	1%
Ripple:	5%

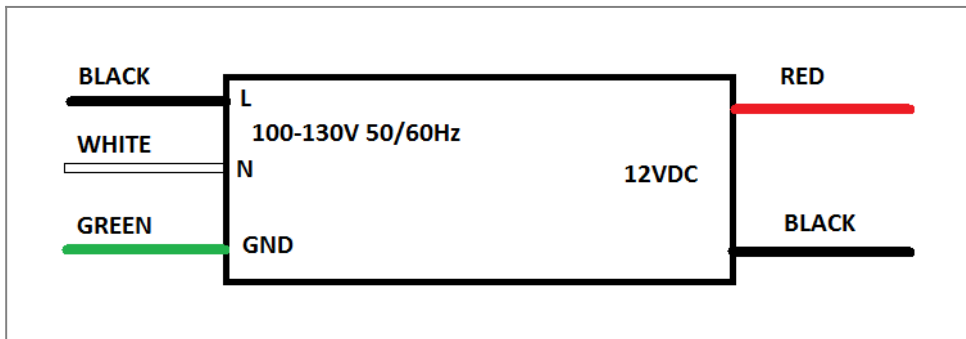

Mailing Address: 6925 Eton Ave. Canoga Park, CA 91303 Tech support: Arik Nirenberg phone: 818-904-3309 cellphone: 818-269-4091
Fax: 818 904 3327 info@emcod.com techsupport@emcod.com