



VETR480/277-250VA	
Description:	480/347V to 277/200V, 250VA transformer
Input Voltage:	480V/347V
Output Voltage:	277V/200V

### PRODUCT FEATURES

- Non-Isolated Autotransformer
- UL Listed
- Thermally Protected (auto reset)
- Max Casing Temperature 105°C
- Sound rated A
- 5 year limited warranty
- Designed for lighting applications
- LED
- Electronic ballasts
- HID
- Low profile cases

### APPLICATION NOTES


- Supply current frequency 60Hz
- Do not use on ungrounded systems
- 
- 

## PRODUCT SPECIFICATION

## STEP DOWN TRANSFORMER

Order Code	Input Voltage	Power Factor	Output Voltage	Max. Output Power
VETR480/277-250VA	480V/347V	0.96	277V/200V	250/180VA

### Physical Parameters

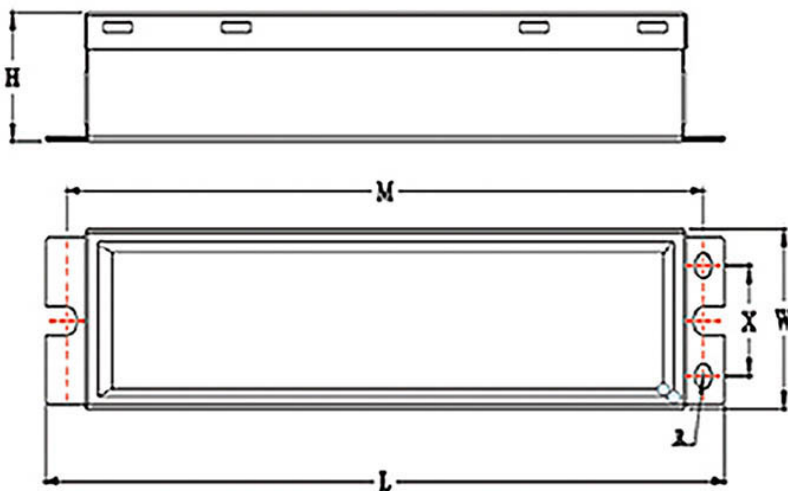

Description	Length
L	9.49 inches
M	8.90 inches
W	1.73 inches
X	1.06 inches
H	1.30 inches
R	1.30 inches
Lead	14 inches (16AWG)

## Wiring Diagram

