


LED ARCHITECTURAL LINKABLE LINEAR - LINK KIT LR42634


IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions carefully before installation.
2. Installation should be in accordance with the national and local electrical laws and regulations.
3. Product should be installed by a qualified and licensed electrician.
4. DO NOT install in humid places, for dry and non-humid environments only.
5. Always turn off the power supply before installation or maintenance.
6. To reduce the risk of fire and overheating, make sure all connections are tight and secure.
7. Fixtures should not be covered with thermal insulation pads or similar materials under any circumstance.

BOX CONTENTS



SPLICING
BRACKET A



SPLICING
BRACKET B



BIG SCREW




SCREW




BAFFLE

INSTRUCTIONS


1. Remove the end cap and upper cover from fixture.

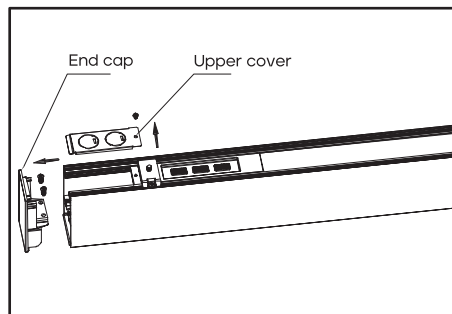


2. Slide the splicing bracket B into locating piece, then lock it with screws.

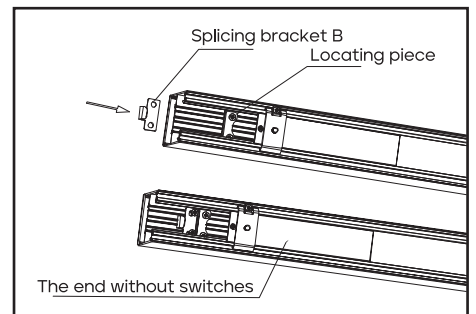


3. Slide the splicing bracket A into locating piece of the other fixture, then lock it with screws.

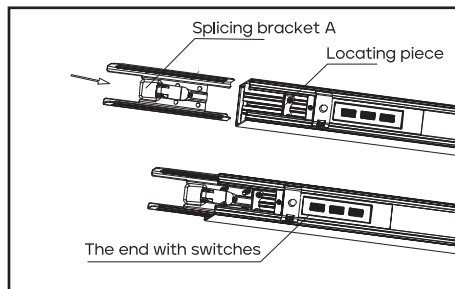

4. Fit the baffle to the profile and remove diffuser plate.

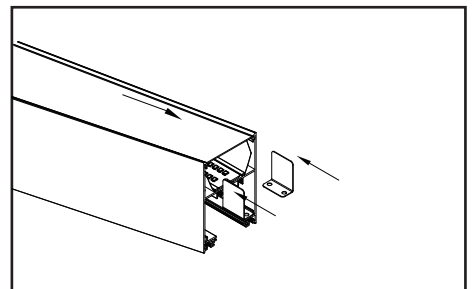


WIRING

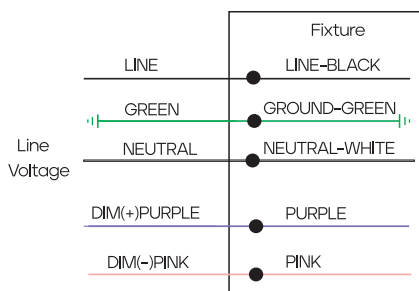


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation


5. Tighten the screws on the baffle.

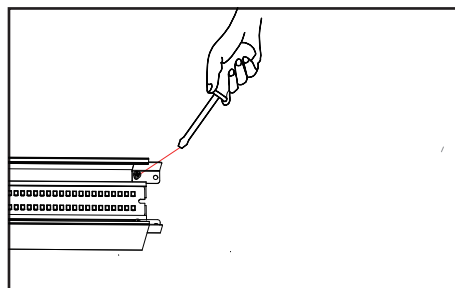


6. Suspend the fixture to the ceiling, please refer to the pendant mounting instructions for this part.

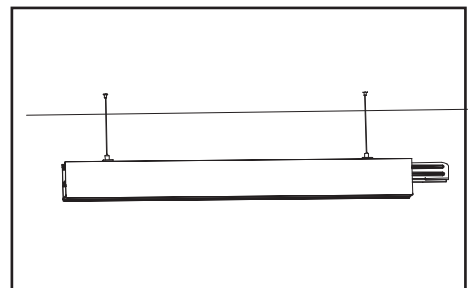


7. Adjust the lifting bracket in the fixture to a suitable position for suspending and linking.

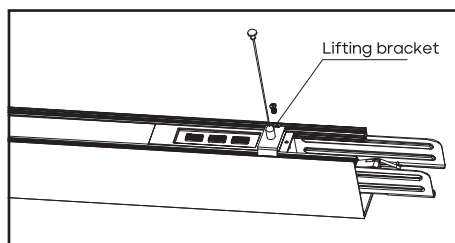

WIRING

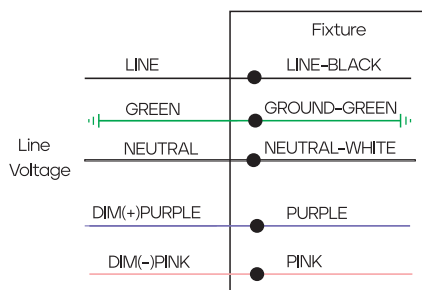


1. If dimming is not used, please separate the dimming wires with nuts.
2. Wiring must follow up the wiring diagram.
3. Remind again: Cut off the power supply before operation.

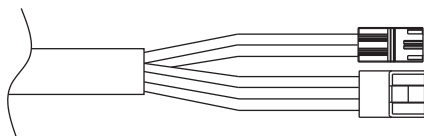


- Three terminals: White (neutral), Black (live), Green (ground).
- Two terminals: DIM+ (purple), DIM- (pink)

8. Plug two fixtures as shown in the figure, insert the splicing bracket A to the splicing bracket B, then pull the lock buckle to splice two fixtures.

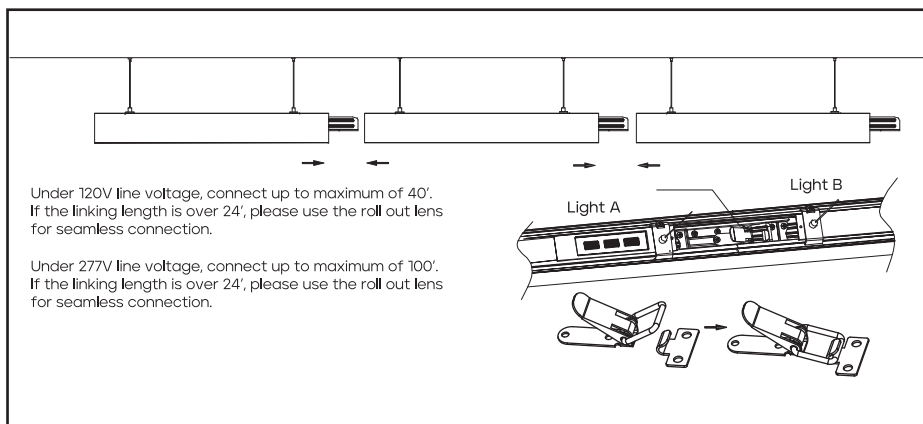

- 9.1. Make electrical connection with male-female connectors.

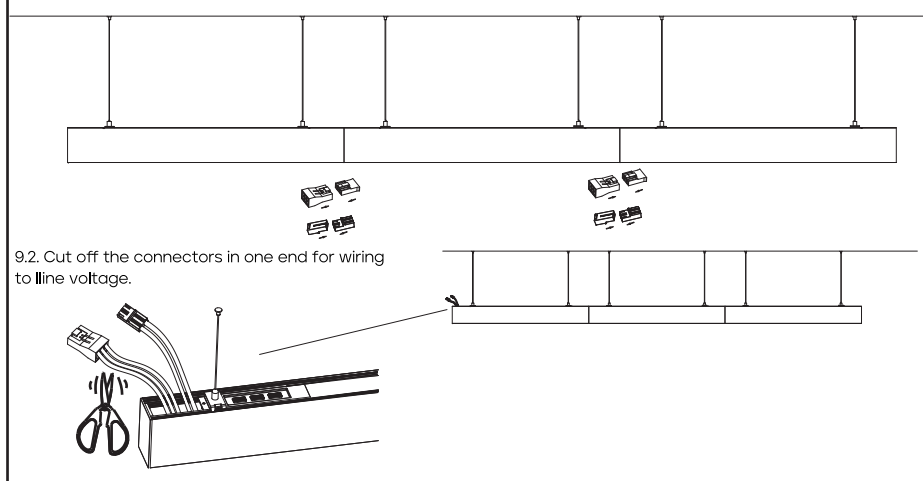

10. Wire according to the wiring diagram, then fasten flexible metal conduit to knock-out, screw back the upper cover to complete installation.

