

LED OUTDOOR SEMI CUT-OFF WALLPACK 3 CCT & 3 WATTAGE SELECTABLE 60W, 120W



LR40562

30W | 45W | 60W

LR40572

80W | 100W | 120W

PHOTOCELL
SENSOR



CRI
80

COLOR SELECTABLE

3000K | 4000K | 5000K

WATTAGE
SELECTABLE

3 OPTIONS

DIMMABLE


0-10V

10KV
SURGE
PROTECTOR

PHOTOCELL
SENSOR

WET
LOCATION
RATED
IP-65

5
YEAR
WARRANTY

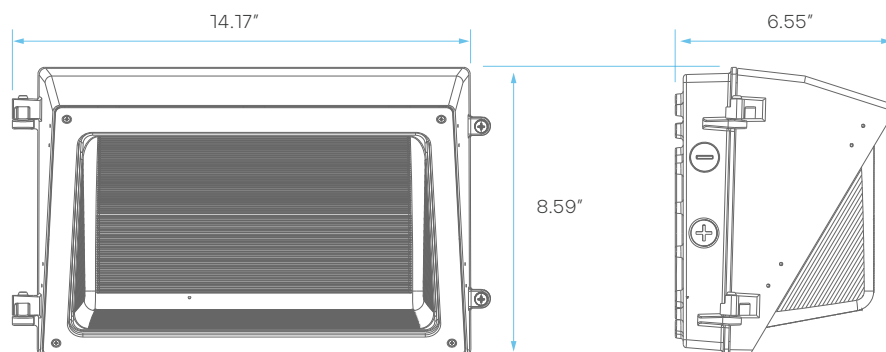

ELECTRICAL

MODEL	DESCRIPTION	INPUT VOLTS	POWER	LUMENS	EFFICACY	DIMMABLE	FLOOD*	COST/YR	
60W	LR40562	LEDSPW60/3WO/3CCT/B/PC/D	120-277V	30	4410 - (3000K)	147	0-10V	94*100°	\$ 7.22
					4680 - (4000K)	156			
					4440 - (5000K)	148			
				45	6345 - (3000K)	143			
					6885 - (4000K)	153			
					6525 - (5000K)	145			
				60	8400 - (3000K)	140			
					9000 - (4000K)	150			
					8520 - (5000K)	142			
120W	LR40572	LEDSPW120/3WO/3CCT/B/PC/D	120-277V	80	11,520 - (3000K)	144	0-10V	93*102°	\$ 14.45
					12,640 - (4000K)	158			
					11,600 - (5000K)	145			
				100	14,100 - (3000K)	141			
					15,500 - (4000K)	155			
					14,200 - (5000K)	142			
				120	16,560 - (3000K)	138			
					18,240 - (4000K)	152			
					16,680 - (5000K)	139			

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	CRI	UL LISTED	DLC LISTED
LR40562	LEDSPW60/3WO/3CCT/B/PC/D	3000K	SOFT WHITE	80	YES	S-7NV7F9
		4000K	COOL WHTIE			
		5000K	BRIGHT WHITE			
LR40572	LEDSPW120/3WO/3CCT/B/PC/D	3500K	SOFT WHITE	80	YES	S-KFVHPQ
		4000K	COOL WHTIE			
		5000K	BRIGHT WHITE			

COMPATIBLE WITH:

LR35133
Emergency LED Driver






LR35133 - SPECIFICATIONS

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	FREQUENCY	INPUT CURRENT	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35133	LED/EMR/8W/DC/HV	8	100-347V	50/60Hz	<100mA	7W	60-300VDC	24Hr	90min

AMBIENT TEMPERATURE: 41°F ~ 140°F

WIRING DIAGRAM

! WARNING: DISCONNECT POWER BEFORE INSTALLING OR SERVICING

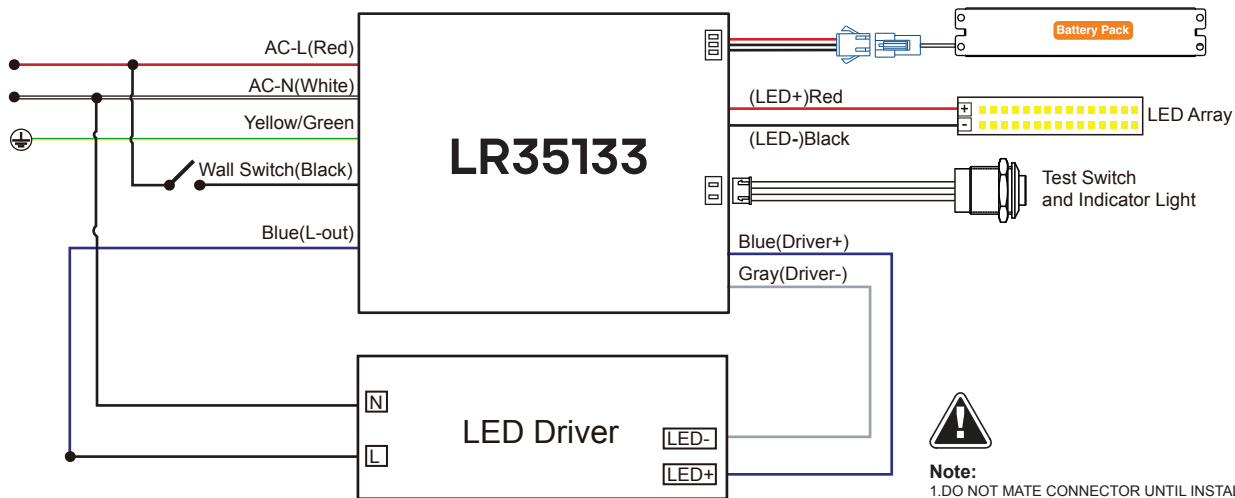

Note:

1. DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND AC POWER IS SUPPLIED.
2. TEST ACCESSORY LEADS-OBSERVE PROPER POLARITY WIRING.
3. DURING EMERGENCY MODE, PRESS TEST SWITCH TWICE TO CUT OFF THE EMERGENCY OUTPUT FOR STORAGE AND SHIPMENT.