

## LED OUTDOOR WALL SCONCE - UP/DOWN & CCT SELECTABLE BLACK, WHITE, BRUSHED NICKEL



LR40310  
WHITE  
FINISH



LR40311  
BRUSHED NICKEL  
FINISH



LR40312  
BLACK  
FINISH



UP/DOWN & CCT  
SELECTABLE



TOP & BOTTOM WITH LED  
BOARD AND DIFFUSER




COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

UP/DOWN & CCT  
SELECTABLE

120-  
277V




### ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
WHITE	LR40310	LEDWS/UD/15W/5CCT/SQ/WT	15	120-277V	67	50,000	\$ 1.80
BRUSHED NICKEL	LR40311	LEDWS/UD/15W/5CCT/SQ/BN	15	120-277V	67	50,000	\$ 1.80
BLACK	LR40312	LEDWS/UD/15W/5CCT/SQ/BK	15	120-277V	67	50,000	\$ 1.80


## PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	ETL LISTED
LR40310	LEDWS/UD/15W/5CCT/SQ/WT	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	100°	90	YES
LR40311	LEDWS/UD/15W/5CCT/SQ/BN	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	100°	90	YES
LR40312	LEDWS/UD/15W/5CCT/SQ/BK	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1000	100°	90	YES


## DIMENSIONS

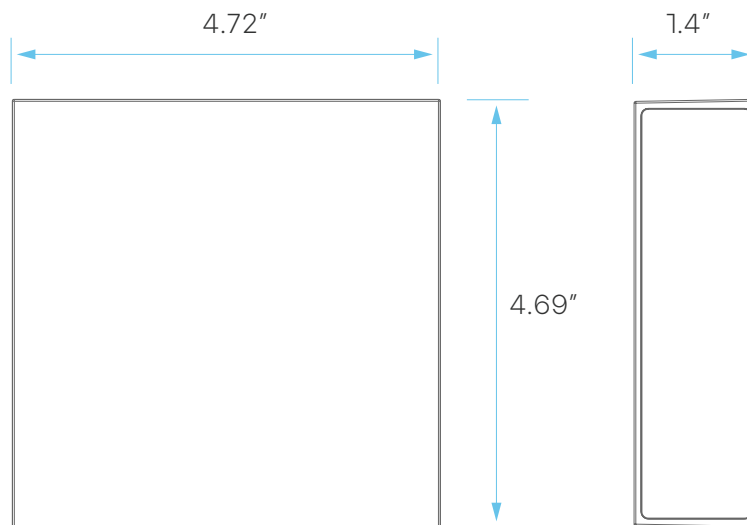

## UP/DOWN & CCT SELECTABLE



UP/DOWN &  
CCT SELECT  
SWITCH ON  
THE BACK  
(\*BEHIND PLATE)

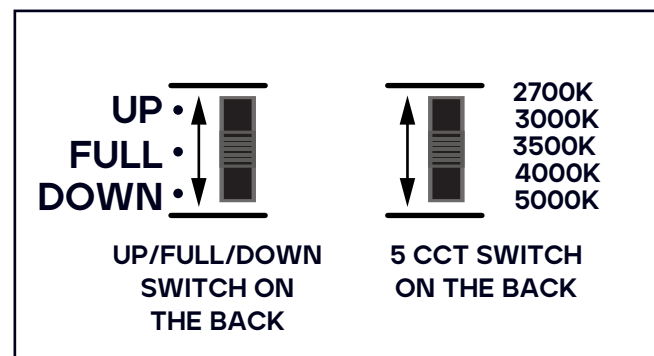

ADJUST LIGHT DIRECTION USING THE UP/FULL/DOWN SWITCH AND DESIRED COLOR USING THE 5 CCT SWITCH ON THE BACK TO YOUR DESIRED SETTINGS.