

PROJECT NAME: _____

CAT. #: _____

NOTES: _____

FIXTURE SCHEDULE: _____

PathMAX™ Slim Bollards

Wattage/CCT Selectable



Single Stilt Leg &
Three Stilt Leg



Square - Flat Top with or
without Louvers



Round - Dome & Flat Top with or without Louvers



Product Description:


The PathMAX™ Slim Bollard is wattage and CCT selectable providing great versatility in a simple bollard fixture. It is available with or without louvers and is the perfect way to light or mark paths and walkways.

Features:

- Wattage Selectable between 10/20/30W
- CCT Selectable between 3000, 4000 or 5000K
- 42" height standard (shorter heights available)
- 120-277V standard, 480V option
- Extruded Aluminum with corrosion resistant powder coat finish
- UV Stabilized impact resistant polycarbonate lens
- 4kV Surge Protection
- -20°C battery backup option available

Mounting:

- Anchor bolts included or can be pre-shipped
- Slotted mounting plate to match existing anchor bolt patterns for retrofits

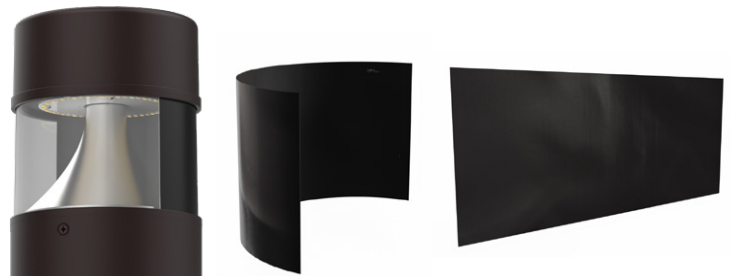

PVC Film Side Shield - Optional Accessory

Ordering Information


FAMILY	WATTAGE	VOLTAGE	-	W SELECT	CCT	FINISH	OPTICS	OPTIONS
BRD = Slim Bollard, Round Dome Top	30 = 30/20/10W	U = 120-277V H = 480V		W = Wattage Selectable	CS = CCT Selectable 3000/4000/5000K	B = Bronze Contact Maxlite for custom finishes	BLANK = Type V LV = Louver (Dome/Flat top only)	BLANK = No Options PC = Photocell E2 = -20°C battery backup
BRF = Slim Bollard, Round Flat Top								
BSF = Slim Bollard Square Flat Top								
BS1 = Slim Bollard, Single Stilt Leg								
BS3 = Slim Bollard, Three Stilt Leg								

PathMAX™ Slim Bollards

Wattage/CCT Selectable

Accessories:

ORDER CODE	MODEL NUMBER	DESCRIPTION
112953	BL-BOLTKIT-3	ANCHOR BOLT KIT FOR 3 BOLT PATTERN SLIM ROUND BOLLARDS
112954	BL-BOLTKIT-4	ANCHOR BOLT KIT FOR 4 BOLT PATTERN SLIM SQUARE BOLLARDS
113326	BL-SHIELD6IN-L	SIDE SHIELD FOR 6 INCH SLIM BOLLARD, PVC FILM, BLACK
113329	BL-SHIELD8IN-L	SIDE SHIELD FOR 6 INCH SLIM BOLLARD, PVC FILM, BLACK



BL-BOLTKIT-3



BL-BOLTKIT-4



BL-SHIELD

Anchor Bolt Kits Include 3/8" x 11" anchor bolts, hex nuts & washers.

NOTE: Anchor bolts are included with fixtures standard, refer to the accessory chart above when pre-shipment of anchor bolts is desired.

DLC 5.1 Listing

MODEL NUMBER	DLC PRODUCT ID#	DLC CLASSIFICATION	DLC PRIMARY USE DESIGNATION
BS130U-WCS[ALL OPTIONS]	S-BZCSNZ	Premium	Bollards
BS330U-WCS[ALL OPTIONS]	S-LBYB12		
BR[F,D]30U-WCS[ALL OPTIONS]	S-W3GFTR		
BSF30U-WCS[ALL OPTIONS]	S-FNTG16		

Lumen Chart

MODEL	10W	10W BUG	20W	20W BUG
BRD	1,260 - 1,350	B1-U3-G1	2,520 - 2,700	B2-U3-G2
BFR				
BSF	1,200 - 1,250	B1-U3-G1	2,400 - 2,500	B1-U3-G2
BS1/3	1,200 - 1,260	B1-U2-G1	2,400 - 2,520	B1-U2-G1


Specifications

	BRD - ROUND, DOME	BRF - ROUND, FLAT	BSF - SQUARE, FLAT	BS - 1 & 3 STILT LEG
Power Consumption (W)	10/20/30W (30W default)			
Lumens Delivered (lm)*	3,890 - 4,080		3,620 - 3,730	3,510 - 3,630
Input Voltage	120-277V, 480V option			
Power Factor	>0.90			
Surge Protection	4kV			
CRI	≥80			
CCT (K)	Selectable - 3000/4000K/5000K			
BUG Rating	B2-U3-G2		B3-U3-G2	B2-U2-B1
L70 Lifetime (hrs)	>100,000			
Operating Temperature	-40°F to 122°F (-40°C to 50°C)			
Listings/Environment	UL, DLC Premium, IP65			
Warranty	5 Years warranty. Check maxlite.com/warranties for details			

*Default setting 30W, see Lumen Chart for lower wattages

Dimensions:


Round – Dome & Flat Top with or without Louvers

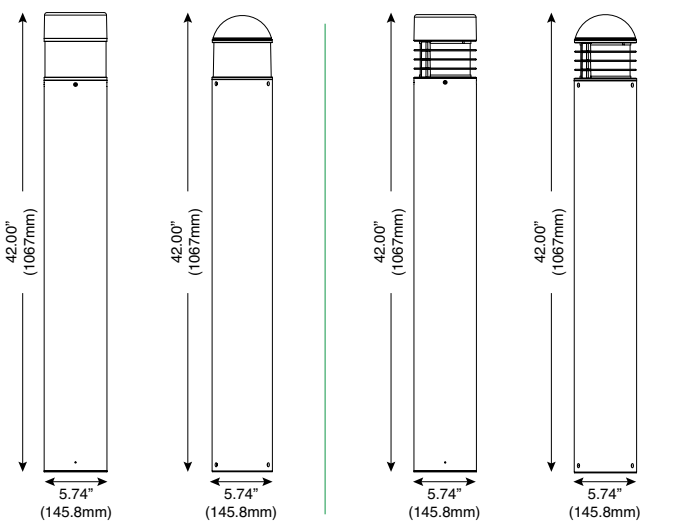

BRF30U-WCSB BRD30U-WCSB


BRF30U-WCSBLV BRD30U-WCSBLV

Square – Flat Top with or without Louvers

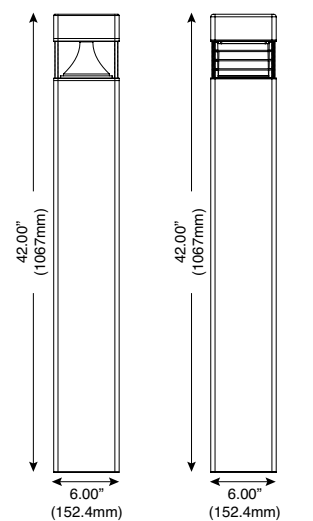

BSF30U-WCSB BSF30U-WCSBLV

Single Stilt Leg & Three Stilt Leg

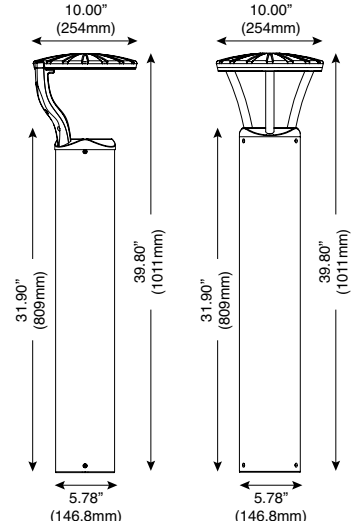

BS130U-WCSB BS230U-WCSB