

LR24916

LED/TLMD1/5CCT/RD/WT



LR24917

TLMD1HO/5CCT/RD/WT



HIGH
OUTPUT



APERTURE	1"
DISTRIBUTION	FIXED
APPLICATION	NEW CONSTRUCTION/TRIMLESS

ELECTRICAL

POWER	LR24916: 9W
	LR24917: 12W
INPUT VOLTS	120V
INPUT CURRENT	LR24916: 70mA
	LR24917: 120mA
FREQUENCY	60Hz
DIMMING TYPE	TRIAC
DIMMING RANGE	10-100%
FEED WIRE GAUGE	14AWG
BREAKER SPECIFICATION *(15A @120V)	LR24916: 171pcs*
	LR24917: 99pcs*

*Mathematically estimated value. Actual capacity may vary by breaker type and installation environment.

PHOTOMETRIC

COLOR CCT	2700K/3000K/3500K/4000K/5000K
CRI	80
LUMEN	LR24916: 500lm
	LR24917: 1000lm
EFFICACY	LR24916: 78lm/w
	LR24917: 83lm/w
BEAM ANGLE	38°

CERTIFICATIONS & SAFETY

LR24916	ETL, ENERGY STAR
LR24917	ETL
WET LOCATON	YES
IC RATED	YES
AIR TIGHT	NO
OPERATING TEMP.	-4°F to 104°F
COST/YR	LR24916: \$0.84
	LR24917: \$1.44
WARRANTY	5 YR

MATERIAL & APPLICATION


HEAT SINK	DIE-CASE ALUMINUM
TRIM	ALUMINUM
LENS	ACRYLIC
CUTOUT	LR24916: Ø2.24"
	LR24917: Ø2.36"
MOUNTING TYPE	TRIMLESS
AREA OF APPLICATION	RESIDENTIAL, COMMERCIAL
CEILING TYPE	DRYWALL, WOOD

DRIVER

	POWER	INPUT VOLTS	INPUT CURRENT	FREQUENCY	INPUT POWER	OUTPUT VOLTAGE	DIMENSIONS	KNOCKOUTS
LR24916 - INCLUDED DRIVER	9	120V	70mA	60Hz	9W max	36V DC	6.06"L X 1.5"W X 1.62"H	2
LR24917 - INCLUDED DRIVER	12	120V	120mA	60Hz	12W max	36V DC	5.5"L X 4.4"W X 1.26"H	1

DIMENSIONS

LR24916 MODULE + MESH
CUTOUT: Ø2.24"

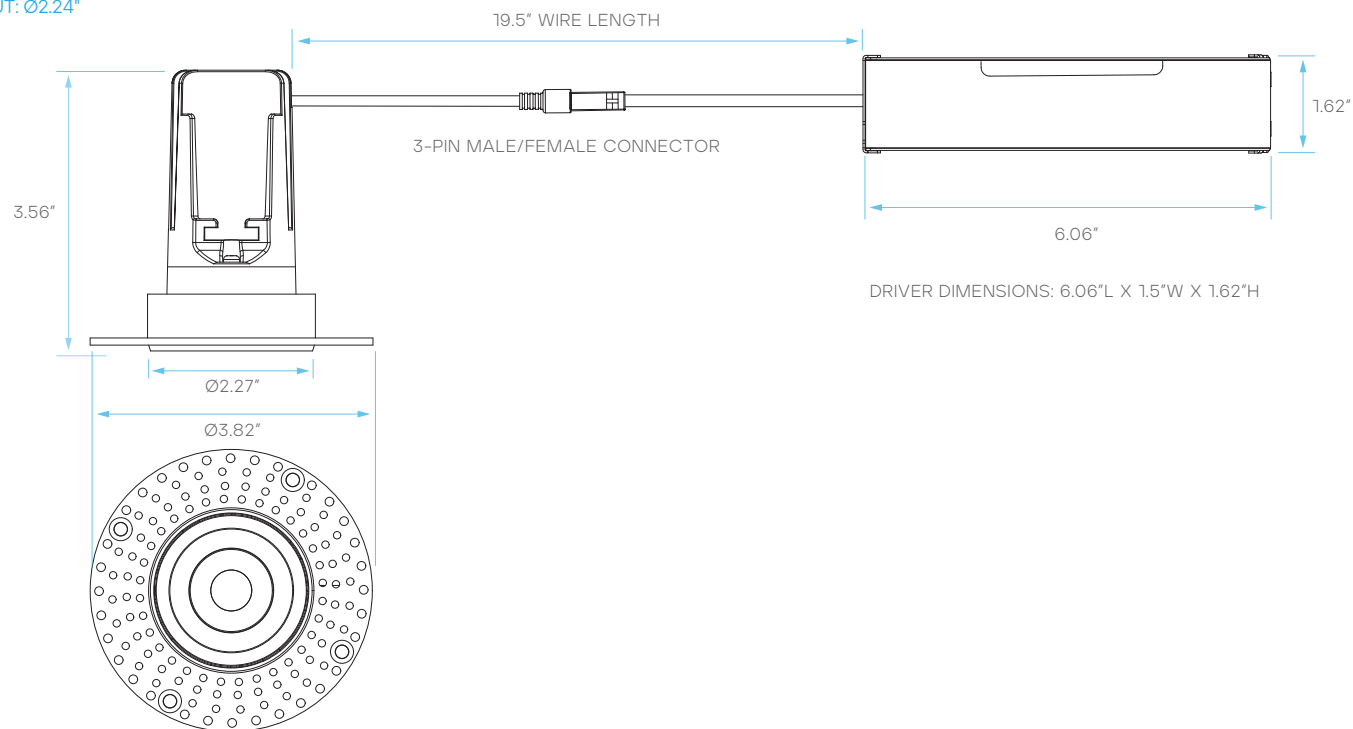

LR24917 MODULE + MESH
CUTOUT: Ø2.36"


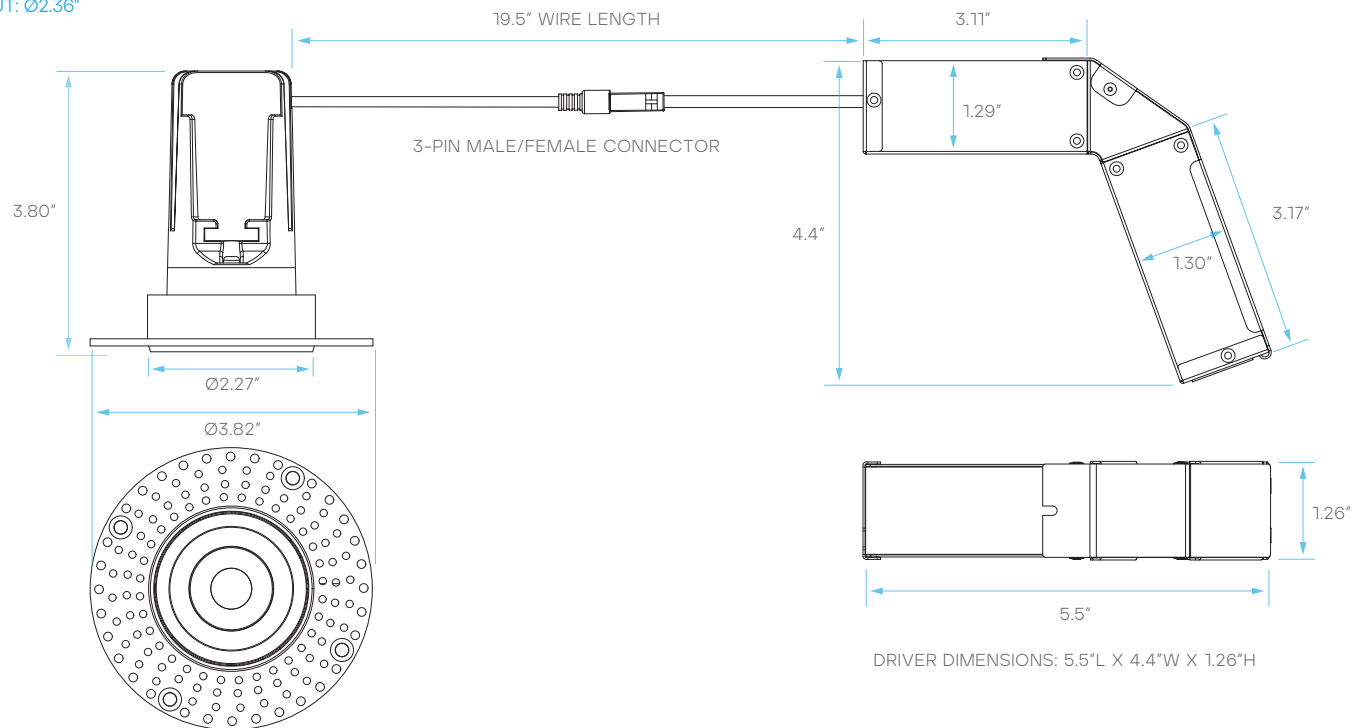



PLATE COMPATIBILITY*

*SOLD SEPARATELY


LR41010
KNOCKOUT
L1

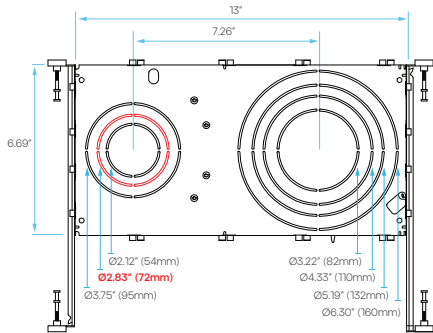


LR41004
KNOCKOUT
1

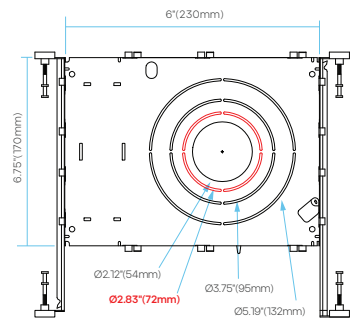

LR41011
KNOCKOUT
1

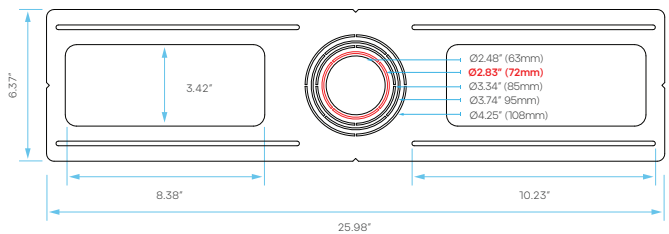

WIRING DIAGRAM

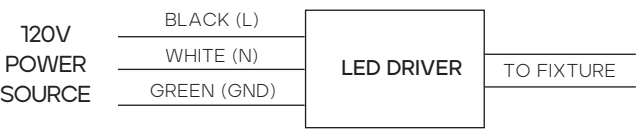

SUGGESTED COMPATIBLE DIMMER*

LUTRON	CTCL-153P
	DVCL-153PDH
	DVCL-153P
LEVITON	6672
	6674
PASS & SEYMOUR	HCL453PTCCCV6

*Dimmer performance may vary based on load, wiring, and installation conditions. Inclusion on this chart does not guarantee compatibility for every installation, and omission does not indicate incompatibility. Refer to the dimmer manufacturer's installation instructions and verify minimum load requirements to avoid field issues

PACKAGING

MODEL	STYLE	INNER BOX DIMENSIONS	MASTER CARTON DIMENSIONS	CASE
LR24916	INNER BOX + MASTER CARTON	5.52" X 4.05" X 5.39"	17.52" X 12" X 7.28"	12
LR24917	INNER BOX + MASTER CARTON	8.46" X 5.70" X 2.16"	21.06" X 11.81" X 11.41"	12