

GX10

2" Spot / Pendant



FEATURES

- 2" round cylinder
- 1100 lm
- 90+ CRI
- Track, canopy, or pendant mount
- Black or white matte finish

MOUNTING

- ECO track / HALO® Power Trac Track and Juno® track
- Monopoint with field cuttable stem
- Field adjustable flexible cord pendant mounting option
- ECOH or ECOJ pendant mount option

ELECTRICAL/CONTROLS

- 120Vac, 50-60Hz input, 12W
- Phase dimmable
- Leading and trailing edge (Triac/ELV) dimming to 5%
- 350° rotation, 90° tilt

LISTING

- ETLus Listed to UL1574 (track suitable for dry locations only)
- cETL Listed to CSA C22.2 #9.0

LED INFO

- LED: Luminus CXM-9
- SDCM: 3-step MacAdam Ellipse
- Lumen Maintenance: $L_{70} > 55,000$ hrs

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

ORDERING CODE

SERIES	GX10		
DELIVERED LUMENS	11LM	1100LM	Calculated Delivered Lumens = [Delivered Lumen Value] x [CCT Multiplier]
CCT & LM MULTIPLIER	27K	2700K	(0.97)
	30K	3000K	(1.00)
	35K	3500K	(1.02)
CRI	90	90 CRI	
OPTIC & LM MULTIPLIER	25D	25 degrees	(0.94)
	35D	35 degrees	(0.98)
	50D	50 degrees	(1.00)
VOLTAGE	120	120V	
DIMMING	ELV	leading and trailing edge (Triac/ELV) dimming to 5%	
MOUNTING OPTIONS	P	pendant, 120" flexible cord	
	MP	monopoint canopy	
	ECOH	ECOH/HALO spot - single circuit	
	ECOJ ¹	ECOJ/JUNO spot - single circuit	
	ECOH ¹ PX	ECOH/HALO pendant -single circuit, 120" flexible cord	
	ECOJ ¹ PX	ECOJ/JUNO pendant - single circuit, 120" flexible cord	
FINISH	BK	black	
	WH	white	
ACCESSORIES	See the last page for details.		

Follow the steps to specify your fixture, example:
GX10 - 11LM - 30K - 90 - 35D - 120 - ELV - ECOJ - BK

NOTES

1. Adaptor designed with adjustable conductor for 2 circuit J-Type tracks.

PROJECT INFORMATION			
JOB NAME		TYPE	
ORDERING CODE			

PHOTOMETRIC DATA

11LM CCT MULTIPLIERS	
	90CRI
2700K	0.97
3000K	1.00
3500K	1.02
FC Formula = CBCP / Distance ²	

25D 25.6° NO ACCESSORY	
Throw Distance (ft) Beam Diameter (ft) 6 92 2.7 8 52 3.6 10 33 4.6 12 23 5.5 14 17 6.4 Illuminance at Center (fc)	
WATTS: 12	LPW: 87.3
LUMENS: 1047	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3320
5	2987
15	1304
25	387
35	174
45	78

35D 37.0° NO ACCESSORY	
Throw Distance (ft) Beam Diameter (ft) 6 61 4 8 34 5.4 10 22 6.7 12 15 8.1 14 11 9.4 Illuminance at Center (fc)	
WATTS: 12	LPW: 92.5
LUMENS: 1110	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	2199
5	2107
15	1412
25	639
35	212
45	64

50D 50.4° NO ACCESSORY	
Throw Distance (ft) Beam Diameter (ft) 6 38 5.7 8 21 7.5 10 14 9.4 12 10 11.3 14 7 13.2 Illuminance at Center (fc)	
WATTS: 12	LPW: 92.8
LUMENS: 1114	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	1369
5	1334
15	1081
25	695
35	319
45	127

11LM CCT MULTIPLIERS	
	90CRI
2700K	0.97
3000K	1.00
3500K	1.02
FC Formula = CBCP / Distance ²	


25D 25.6° SN00T-BK	
Throw Distance (ft) Beam Diameter (ft) 6 93 2.7 8 52 3.7 10 34 4.6 12 23 5.5 14 17 6.4 Illuminance at Center (fc)	
WATTS: 12	LPW: 76.4
LUMENS: 917	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	3359
5	3027
15	1321
25	373
35	120
45	20

35D 37.4° SN00T-BK	
Throw Distance (ft) Beam Diameter (ft) 6 61 4.1 8 35 5.4 10 22 6.8 12 15 8.1 14 11 9.5 Illuminance at Center (fc)	
WATTS: 12	LPW: 82.2
LUMENS: 987	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	2209
5	2124
15	1438
25	591
35	156
45	15


50D 47.8° SN00T-BK	
Throw Distance (ft) Beam Diameter (ft) 6 38 5.3 8 21 7.1 10 14 8.9 12 9 10.7 14 7 12.4 Illuminance at Center (fc)	
WATTS: 12	LPW: 71.7
LUMENS: 861	CCT: 3000K
INTENSITY	
DEGREE	CANDELA
0	1362
5	1330
15	1082
25	620
35	197
45	22

PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		



MOUNTING OPTIONS




ECOH




ECOJ

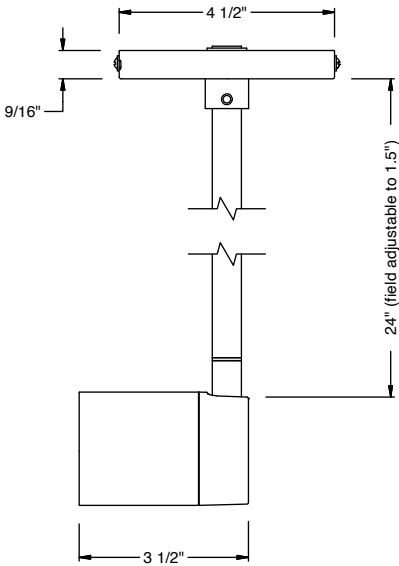


MONOPOINT

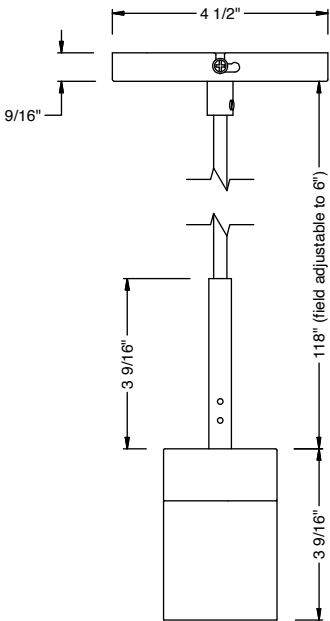

PENDANT

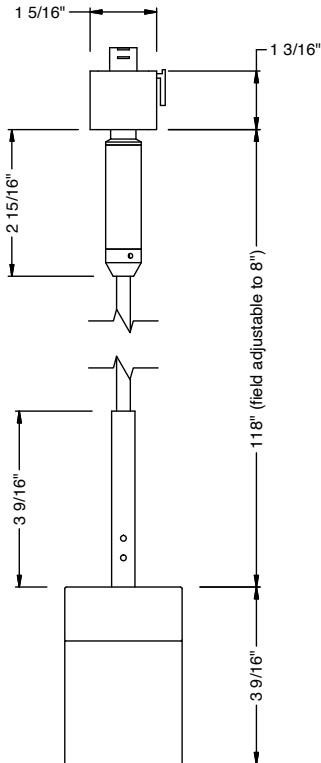

ECOHP / ECOJP



PROJECT INFORMATION		
JOB NAME		TYPE
ORDERING CODE		

ACCESSORIES

Follow the steps to specify your fixture, example:
GX10 - 11LM - 30K - 90 - 35D - 120 - ELV - ECOH - BK - SNOOTBK

- Accessories
- GX10-SNOOT-BK

GX10-SNOOT-WH

GX10-HCL-BK

GX10-HCL-WH

ECOH-MP-CANOPY-BK

ECOH-MP-CANOPY-WH

ECOJ-MP-CANOPY-BK

ECOJ-MP-CANOPY-WH
- snoot, black

snoot, white

honeycomb louver, black

honeycomb louver, white


ECOH square canopy, black

ECOH square canopy, white


ECOJ round canopy, black

ECOJ round canopy, white

NOTE: 1. Omit GX10 from code when requesting accessory with fixture
2. Fixture will only accept one accessory at a time

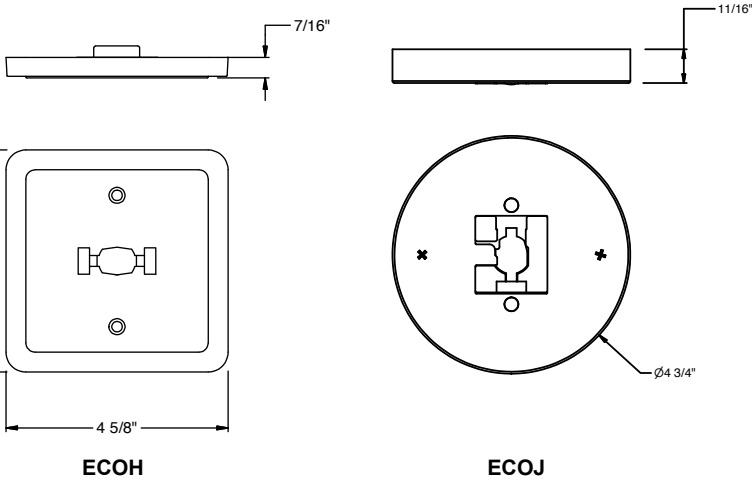

SNOOT

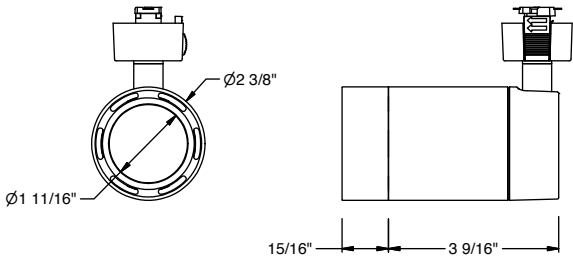

HONEYCOMB LOUVER

