

# PureStyle Compact Powercore

Date: \_\_\_\_\_  
Type: \_\_\_\_\_  
Firm Name: \_\_\_\_\_  
Project: \_\_\_\_\_

**IntelliHue, 100° x 100° (Native beam), Low Power, 1219 mm (48 in)**

Premium interior concealed compact linear luminaire with intelligent white and color light

Innovative PureStyle Compact Powercore luminaires bring lighting professionals high output in a compact, easily concealed luminaire. PureStyle Compact delivers exceptionally high-quality light for a wide range of interior applications from cove to wall-washing to backlighting and beyond. Here are just some of the powerful advantages that PureStyle brings to lighting professionals and their clients.



- **Unbeatable Performance**—Major innovations, including a unique optical cluster, enable PureStyle Compact to deliver up to 96 CRI, lumen outputs of up to 480 lm, and color temperatures that range from 2000 K to 10000 K – delivering bright, smooth light.
- **Innovative Design** — With its compact size and color mixing directly out of the luminaire, PureStyle Compact can excel in areas where traditional linear luminaires are impractical. It's available in 305 mm (1 ft) and 1219 mm (4 ft) plastic housings, in a standard wide beam (100° x 100°), with an optional beam narrowing accessory (60° x 90°). Interlocking connectors ensure end-to-end installation without visible light scalloping between luminaires – just pure, seamless light.
- **Superior Color Consistency** — Optibin, our proprietary binning optimization process, guarantees uniformity and consistency of hue across LEDs, luminaires, and manufacturing runs.
- **White and Color Light** — PureStyle Compact combines tunable white and dynamic color light in one innovative, high-performance luminaire that's easy to install and control.
- **High R9 Values** — PureStyle Compact delivers R9 values that can reach up to 87.
- **Industry-Leading Controls** — PureStyle Compact luminaires work seamlessly with the complete Color Kinetics line of controllers, including iPlayer 3, Light System Manager, and ColorDial Pro – as well as third-party controllers.
- **Higher Efficiency, Lower Cost** — All PureStyle Compact luminaires integrate Powercore technology, which controls power output to luminaires directly from line voltage – rapidly, efficiently, and accurately. The Color Kinetics Data Enabler Pro merges line voltage with control, and delivers them to the luminaire over a single standard cable – simplifying installation dramatically and lowering total system cost.
- **Easy Installation** — PureStyle Compact luminaires accept power input of 100 to 277 VAC for consistent installation anywhere in the world. Powercore allows long runs and eliminates the need for special wiring and external power supplies. For example, special connectors enable PureStyle luminaires to be connected directly (using jumper cables) with leader cables or with the terminator.
- **Versatile Accessory Options** — A range of accessories are available for PureStyle Compact. The masking plate can be coupled with a bridge, allowing it to be installed in line or even around corners without spill light. Constant torque 90° rotatable hinges are easily reversible allowing 180° of rotation, simple and consistent position control, and mounting flexibility. A glare-reducing lens is available to narrow the native beam to 60° x 90°. The wiring compartment, mounting track, and leader and jumper cables are all shared with the original PureStyle luminaires for ease of installation.

For detailed product information, please refer to the PureStyle Compact Product Guide at [www.colorkinetics.com/global/products/intellihue/purestyle-compact-intellihue/](http://www.colorkinetics.com/global/products/intellihue/purestyle-compact-intellihue/)

# Specifications

Due to continuous improvements and innovations, specifications may change without notice.

## Output

Beam Angle	100° x 100°
Lumens 2700 K †	1,020
Lumens 3000 K *	1,088
Lumens 3500 K *	1,076
Lumens 4000 K *	1,036
Lumens 5000 K *	1072
Lumens 6500 K *	1000
Lumens per channel *	R 508 / G 1080 / B 328 / W 1232
Efficacy (lm/W) 3000 K	66.9
CRI 3000 K	95

## Electrical

Input Voltage	100 to 277 VAC, auto-ranging, 50/60 Hz
Power Consumption	19 W
(Maximum at full output, steady state)	
Power Factor	0.97 @ 120 VAC
Surge Limits ¶	1 kV maximum differential (L to N) 2 kV maximum common (L to Gnd or N to Gnd)
For additional Surge Protection Requirements for LED Lighting Systems, please refer to <a href="http://www.colorkinetics.com/KB/surge-protection">www.colorkinetics.com/KB/surge-protection</a> .	

## Control

Interface	Data Enabler Pro (DMX or Ethernet)
Control Channels	4 channels per 1 ft section
For additional Control Channel information, please refer to <a href="http://colorkinetics.helpdocs.io/article/fv5rkpvclq">https://colorkinetics.helpdocs.io/article/fv5rkpvclq</a> .	
<b>Control System</b>	

Color Kinetics full range of controllers, including iPlayer 3, iPlayer 4, Antumbra iColor Keypad, and ColorDial Pro, or third-party controllers

Remote Monitoring & Management Works with Interact Landmark

## Lumen Maintenance

Threshold§	Ambient Temperature	Reported ¶¶	Calculated ¶¶
L <sub>90</sub>	25 °C	> 42,000	44,802
	50 °C	41,766	41,766
L <sub>80</sub>	25 °C	> 42,000	> 100,000
	50 °C	> 42,000	96,008
L <sub>70</sub>	25 °C	> 42,000	> 100,000
	50 °C	> 42,000	> 100,000
L <sub>50</sub>	25 °C	> 42,000	> 100,000
	50 °C	> 42,000	> 100,000

## Physical

Dimensions (Height x Width x Depth)	37.5 x 1205 x 37 mm (1.48 x 47.44 x 1.46 in)
Weight	0.75 kg (1.65 lb)
Housing Material	White polycarbonate
Lens	Polycarbonate
Luminaire Connections	Integral male/female connectors

### Temperature Ranges

-20 to 50 °C (-4 to 122 °F) Operating  
-20 to 50 °C (-4 to 122 °F) Startup  
-40 to 80 °C (-40 to 176 °F) Storage

Humidity 0 to 95%, non-condensing

### Thermal Protection enabled

For additional Thermal Protection information, please refer to <https://colorkinetics.helpdocs.io/article/sh301ducix>

### Luminaire Run Lengths

To calculate luminaire run lengths and total power consumption for your specific installation, download the Configuration Calculator from [www.colorkinetics.com/support/install\\_tool/](http://www.colorkinetics.com/support/install_tool/)

## Certification and Safety

Approbation	UL/cUL, FCC Class B, CE, PSE, RCM, CCC, BIS, EAC, UA
Environment	Dry/Damp Location, IP20
For additional Energy Efficiency Class Information, please refer to <a href="https://colorkinetics.helpdocs.io/article/cviiis2p8qq">https://colorkinetics.helpdocs.io/article/cviiis2p8qq</a> .	



\* Correlated color temperature (CCT) complies with ANSI C78.377-2008 for the chromaticity of solid state lighting products.


† 305 mm (1 ft) lumen output measurements comply with IES LM-79-08 testing procedures. 1219 mm (4 ft) measurements are estimated based on the 305 mm (1 ft) measurements.

§ L<sub>xx</sub> = 50% lumen maintenance (when light output drops below 50% of initial output). All values are given at B10, or the median value where 90% of the LED population is better than the reported or calculated lumen maintenance measurement.

¶ Minimum surge limits per IEC 61547, tested in accordance with IEC 61000-4-5.

¶¶ Lumen maintenance figures are based on lifetime prediction graphs supplied by LED source manufacturers. Whenever possible, figures use measurements that comply with IES LM-80-08 testing procedures. In accordance with TM-21-11, Reported values represent the interpolated value based on six times the LM-80-08 total test duration (in hours). Calculated values represent time durations that exceed six times the total test duration.


## Dimensions

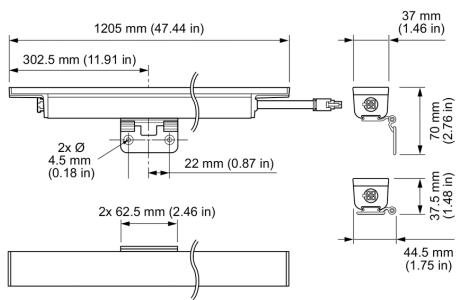


## Photometrics Low Power, 3000 K, 100° x 100°, 305 mm (12 in)

Photometric data is based on full hemisphere testing to IES standards.

Beam Angle	100° x 100°
LED	3000 K
Lumens	272.0
Efficacy (lm/W) 3000 K	66.9



### Polar Candela Distribution




	0	25	45	70	90
0	91	91	91	91	91
5	90	90	91	91	91
15	86	86	87	87	88
25	79	79	80	80	81
35	68	69	70	71	71
45	56	57	58	59	60
55	43	44	45	46	47
65	29	30	32	33	34
75	15	16	18	20	20
85	3	4	6	8	8
90	0	2	3	5	6

Cd: 0 90°  
VA: 0° 10° 20° 30° 40°

■ - 0° H ■ - 90° H

### Illuminance at Distance

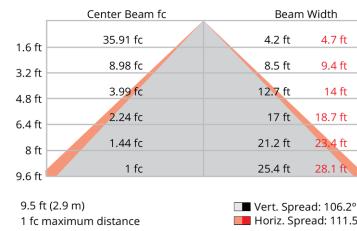

9.5 ft (2.9 m)  
1 fc maximum distance  
■ Vert. Spread: 106.2°  
■ Horiz. Spread: 111.5°

### Zonal Lumen

Zone	Lumens	% Luminaires
0-30	70	25.70%
0-40	113.8	41.80%
0-60	199.1	73.10%
60-90	57.3	21%
70-100	29.4	10.80%
90-120	9.7	3.60%
0-90	256.4	94.10%
90-180	16	5.90%
0-180	272.4	100%

For lux multiply fc by 10.7

### Coefficients of Utilization – Zonal Cavity Method

RCC %:	Effective Floor Cavity Reflectance: 20%											
	80	70	60	50	40	30	20	10	0	0	0	0
RCC:	0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.02	1.02	0.97
RW %:	70	50	30	0	70	50	30	0	50	30	20	0
0	1.08	1.02	0.98	0.94	1.04	0.99	0.95	0.79	0.94	0.91	0.88	0.89
1	0.97	0.89	0.82	0.76	0.94	0.86	0.8	0.66	0.82	0.77	0.72	0.78
2	0.89	0.78	0.7	0.63	0.86	0.76	0.68	0.58	0.72	0.66	0.6	0.69
3	0.89	0.78	0.7	0.63	0.86	0.76	0.68	0.58	0.72	0.66	0.6	0.65
4	0.81	0.69	0.6	0.53	0.78	0.67	0.59	0.48	0.64	0.57	0.51	0.61
5	0.81	0.69	0.53	0.43	0.6	0.5	0.48	0.38	0.52	0.43	0.38	0.4
6	0.69	0.55	0.4	0.34	0.6	0.5	0.46	0.37	0.52	0.44	0.39	0.43
7	0.64	0.5	0.42	0.35	0.62	0.49	0.41	0.33	0.47	0.4	0.34	0.4
8	0.59	0.46	0.37	0.32	0.57	0.45	0.37	0.29	0.43	0.36	0.31	0.41
9	0.55	0.42	0.38	0.28	0.54	0.41	0.33	0.27	0.4	0.3	0.28	0.38
10	0.52	0.39	0.31	0.26	0.5	0.38	0.31	0.24	0.37	0.3	0.25	0.35

# Luminaire and Accessories

Use Item Number when ordering in North America

	<b>Item Number</b>	<b>Item 12NC</b>
PureStyle Compact Powercore, IntelliHue, 100° x 100°, Low Power, 1219 mm (48 in)	123-000027-03	912400137113
<b>Accessories</b>		
Leader Cable, UL, 3 m (10 ft)	108-000065-00	912400133637
Leader Cable, CE/CCC, 3 m (10 ft)	108-000065-01	912400133638
Jumper Cable, UL, 305 mm (1 ft)	108-000066-00	912400133639
Jumper Cable, CE/CCC, 305 mm (1 ft)	108-000066-01	912400133640
Mounting Track, White	120-000194-00	912400133643
Wiring Compartment, UL	120-000191-00	912400133644
PureStyle & PureStyle Compact Masking Plate, 1219 mm (4 ft)	120-000213-04	912400136913
Glare-reducing lens	120-000214-04	912400136915
<b>Power Supplies</b>		
Data Enabler Pro, 3/4 in / 1/2 in NPT (U.S. trade size conduit)	106-000004-00	910503701210
Data Enabler Pro, PG21/PG13 (metric size conduit)	106-000004-01	910503701211



© 2024 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed.

Color Kinetics  
[www.colorkinetics.com/global/products/intellihue/purestyle-compact-intellihue/](http://www.colorkinetics.com/global/products/intellihue/purestyle-compact-intellihue/)