


UL Classified for recessed can lights up to 6"

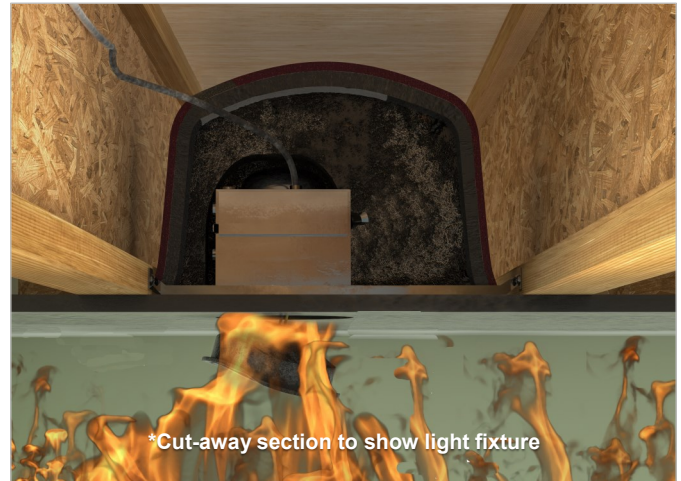

The FF109X is **the only two hour UL classified** fire barrier that can be used with a wide range of recessed lights to effectively prevent the spread of flames through a ceiling opening.

The **flexible and lightweight** enclosures are made out of an intumescent material which will be activated in case of a fire, stopping both, flame spread and heat transmission for up to 2 hours.

## Key Benefits

- ⇒ 120 minute protection
- ⇒ **Fits most popular IC rated fixtures**
- ⇒ For use with recessed incandescent, fluorescent or LED light fixtures
- ⇒ For Joist Spacing up to 24" on center
- ⇒ Suitable for 2"x10", 2"x12", 2"x14" and 2"x16" joists
- ⇒ Can be used in floor/ceiling, as well as roof/ceiling assemblies (attic)
- ⇒ Flexible and lightweight (approx. 2.5 lbs)
- ⇒ Easy Installation - can be fitted in seconds - no screws, drilling or additional sealant required
- ⇒ Maintenance free
- ⇒ **UL Classified**



## Approvals

UL Classified to maintain fire ratings of up to two hours for the following fire-rated floor/ceiling assemblies:

L500, D500, G500, D200, G200, J200, and L200 series

UL Classified to maintain fire ratings of up to one hour for the following roof/ceiling assemblies (attics):

P200 and P500 series

## Dimensions

