



## 2X4 SLIM SURFACE MOUNT PANEL - CCT & WATTAGE SELECTABLE LR24014




| PART | DESCRIPTION            | QTY |
|------|------------------------|-----|
| A    | TOGGLE BOLTS           | 4   |
| B    | #32 US BOLTS           | 2   |
| C    | P2 TERMINAL            | 2   |
| D    | 3-HOLE WIRING TERMINAL | 3   |

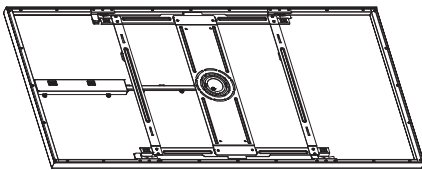


### INSTRUCTIONS

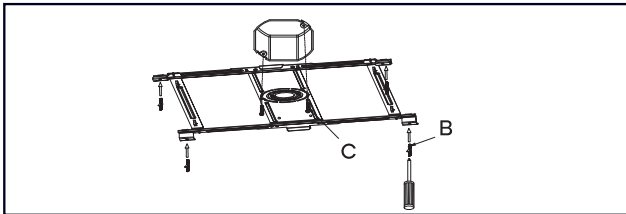


1. Attach the installation plate to the ceiling box with screws C, and tighten the Toggle bolts B to secure plate.

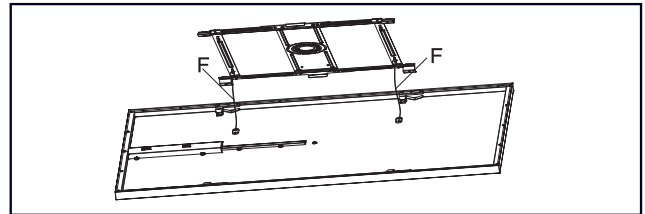


2. Hang the safety rope F on the installation plate.

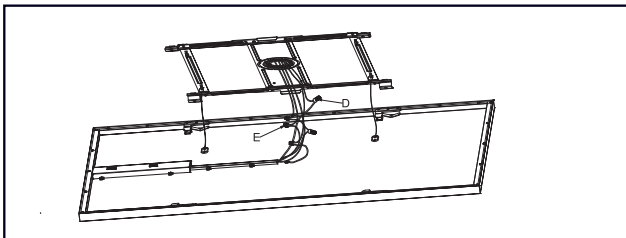


3. Connect the dimming light with P2 terminal D, and connect the power line and ground wire with the 3 hole wiring terminal E (bare copper wire to green ground wire, other wire colors match.)

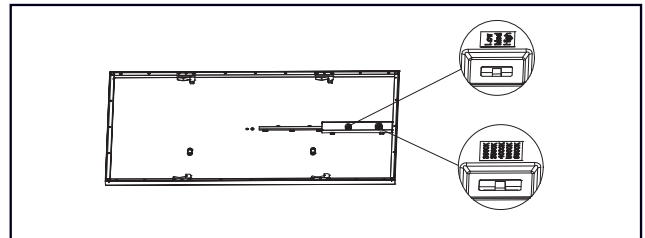


4. Turn the power switch and color temperature switch to the desired setting.

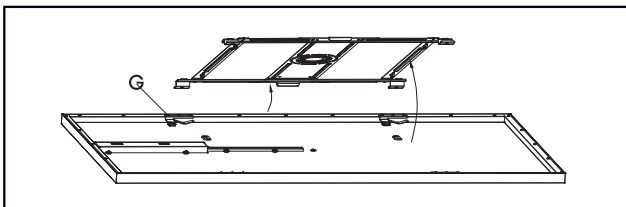

5. Align the inner edge of the aluminium frame of the fixture with both sides of the mounting plate, closely adhere to the ceiling, and ensure that the mounting plate is positioned in front of the lamp body spring G.

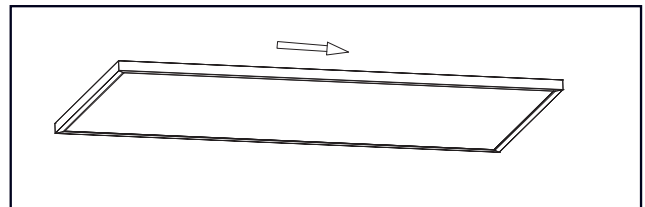

6. Push the fixture towards the mounting plate slot, so that the spring of the fixture is engaged with the mounting plate slot.

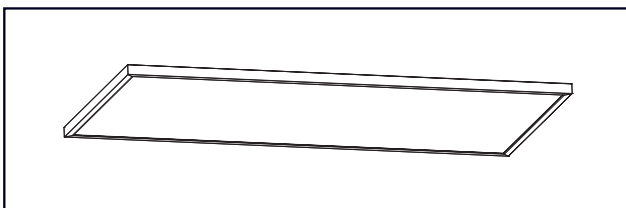

7. Installation completed.